



**Q2**  
2022

▲ **LUCCA LIGHT**  
**EU Stock Catalog**

# Catalog

## LED Street Light



LU-STNA  
130lm/W  
Page 1-2



LU-STNB  
130lm/W  
Page 3



LU-CS  
130lm/W  
Page 4



LU-ST  
150lm/W  
Page 5-6



LU-STWE  
130lm/W  
Page 7



LU-STH  
150lm/W  
Page 8


## LED HighBay



LUZC-UFO  
High Lumen 180lm/W  
Page 9



LUZC-UFO  
0-10V Dimming  
Page 10



LUZC-UFO  
DALI-2 Dimming  
Page 11

## LED Wall Pack



LU-WLR  
130lm/W  
Page 12

## LED Flood Light



LU-FLE  
120lm/W  
Page 13



LU-LT  
140lm/W  
Page 14

## LED IP66 Tri-proof Light



LU-TPB(pro)  
150lm/W  
Page 15



LU-TPB  
130lm/W  
Page 16



LU-TPC(pro)  
130lm/W  
Page 16



LU-TPW  
120mm 160lm/W upto 20,000lm  
Page 17

## LED Track Light



LU-TRX  
Wattage Switchable  
Page 18



LU-TRX  
Wattage Switchable  
Page 18




LUJB-TR252-35W  
UGR < 19  
Page 19



LUJB-TR160-30W  
UGR < 19  
Page 19



LU-FT1062W  
CCT&Brightness Dimming  
Beam Angel Dimming  
Page 20



LU-FT1062B  
CCT&Brightness Dimming  
Beam Angel Dimming  
Page 20




LU-TR301  
UGR < 19  
Page 21



LU-TR301  
UGR < 19  
Page 21

# Catalog

## LED Linear Light



LU-L3570A-UU  
Up-Down Lighting  
Page 22-23



LU-L3570B-DUR  
100°&34°  
Page 24



LU-L3570C-DUR  
UGR<13 34°  
Page 25




LU-L5065  
Page 26



LU-L5270  
Page 27



LU-L5270  
CCT Switchable  
Page 28



LU-L5270  
Wire-Through Connect  
Page 29

## LED Viewline Free-Standing Luminaire




LU-FS3-2000  
Up-Down lighting  
Page 30-31

## LED Linear System



LU-6870D (Linear System)  
Page 32-33


## LED Sidelit Panel Light




LU-6060  
CCT Dimmable  
Page 34



LU-6060(UGR)  
UGR<19  
Page 35



LU-30120  
Page 35




LU-60120  
Page 35



LU-6060  
Page 36



LU-6060HA  
Page 36



LU-30120HA  
Page 36

## LED Backlit Panel Light



BKLU-6060  
CCT&Watt Switchable  
Page 37



BKLU-6060  
Super slim 25mm  
Page 38



BKLU-6060  
ECO Super slim 25mm  
Page 39



BKLU-6060  
High E 160lm/W  
Page 40-41



BKLU-6060  
Page 42



BKLU-6060(IP65)  
IP65 waterproof  
Page 43

# Catalog

## LED Air circulation Germicidal Lamp



LU-6060-36WACG1


Page 43

## Accessory • LED Driver

### Constant Current



Multi-Funtion Driver  
DALI / 0-10V / PUSH  
/PWM diming  
Page 45



Multi-Funtion Driver  
DALI / 0-10V / PUSH  
/PWM diming  
Page 46



IP67 DALI Driver  
Page 46



0-10V Driver  
Switchable  
Build-in& Indep.  
Page 46



0-10V Driver  
Switchable  
Page 49



WIFI&Bluetooth Driver  
WIFI&Bluetooth3.0  
Tuya System Support  
Page 47



RF2.4G Driver  
RF2.4G Wireless  
Dimming  
Page 48



Zigbee Driver  
Zigbee3.0 wireless  
Tuya System support  
Page 48



LED Driver  
Switchable Watt  
Switchable Current  
Page 49



Philips Driver  
Page 49

### Constant Voltage



IP67 DALI-2 Driver  
IP67 waterproof  
Page 50



IP20 0-10V Driver  
Ultra-Slim Size  
Page 51



IP67 0-10V Driver  
IP67 waterproof  
Page 52



IP20 Driver  
Page 52



IP20 Driver  
Ultra-Slim Size  
Page 53



IP67 LED Driver  
Waterproof  
Page 53



Emergency Driver  
Switchable, LiFePO4  
Self-test function  
Page 54



Emergency Driver  
LiFePO4 battery  
Self-test function  
Page 54

### Emergency pack

## Accessory • LED Dimmer



0-10V Dimmer  
Page 55



TRIAC Dimmer  
Page 55



# Catalog

## Accessory • Track



Surface Mount Track  
4 wires 3 circuit  
**Page 56-57**




Recessed Track  
4 wires 3 circuit  
**Page 58**



Suspension Accessories  
**Page 59**


## Accessory



For Panel Light  
**Page 60-61**



For Triproof Light  
**Page 61**



For UFO  
**Page 62**




Other Accessory  
**Page 63**



- ★Modern design, various choices;
- ★Saves 80% on electricity cost;
- ★Low maintenance; longer lifespan;
- ★Weatherproof body – IP66/67;
- ★Optically optimized glass lenses;
- ★Uniformity in light distribution – maximizes efficiency;
- ★Fully operational in extreme weather
- ★Surge protection, 4KV/5KV;
- ★Pole Size Ø 60mm;

**5**  
YEARS  
Warranty

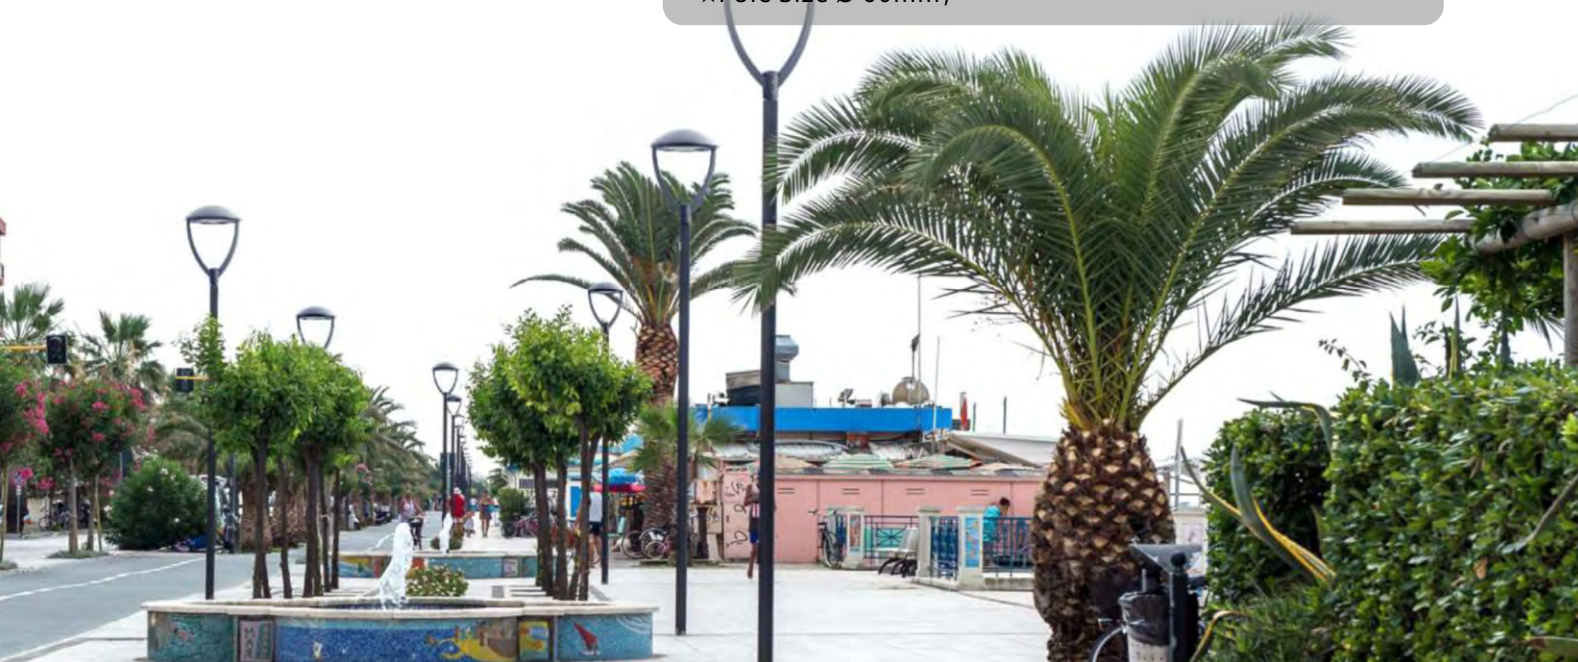

- ▶ SMD LED Type the lifetime L70B10>100,000 hours
- ▶ Die casting aluminum with good heat-dissipation
- ▶ CRI:>80, IP66 protection class
- ▶ High Quality **CE Driver** ,**LUMILEDS Chips**
- ▶ AC Input: 110V-277V,50/60Hz
- ▶ No Flickering



**5**  
YEARS  
Warranty




**EAN : 69012266**

LU-STNA-30W

**130lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT                |
|-------------|------------|---------------|---------------|--------------------|
| 30W         | 130lm/W    | AC110-277V    | 3900lm        | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight           |
| Grey        | 60x145°    | 1 Pcs         | 460*460*240mm | 14kg               |

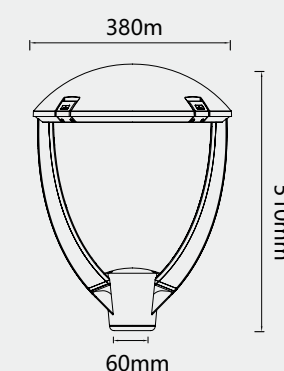


**EAN : 69012273**

LU-STNA-50W

**130lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen       | CCT                |
|-------------|------------|---------------|-------------|--------------------|
| 50W         | 130lm/W    | AC110-277V    | 6500lm      | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size    | G.Weight           |
| Grey        | 60x145°    | 1 Pcs         | 460*460*240 | 14kg               |

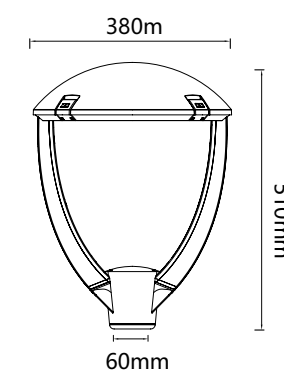

*Light up your life*

www.luccalight.cz


**STREET LIGHT**

1





- ▶ SMD LED Type the lifetime L70B10>100,000 hours
- ▶ Die casting aluminum with good heat-dissipation
- ▶ CRI:>80, IP66 protection class
- ▶ High Quality **CE Driver** ,**LUMILEDS Chips**
- ▶ AC Input: 110V-277V,50/60Hz
- ▶ No Flickering

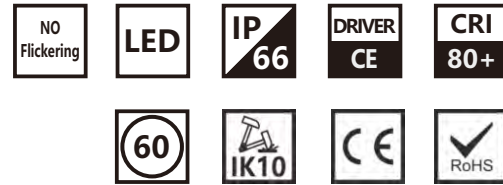


**EAN : 00110013**

LU-STNA-30W

**130lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT              |
|-------------|------------|---------------|---------------|------------------|
| 30W         | 130lm/W    | AC110-277V    | 3900lm        | 3000K Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight         |
| Grey        | 60x145°    | 1 Pcs         | 460*460*240mm | 14kg             |

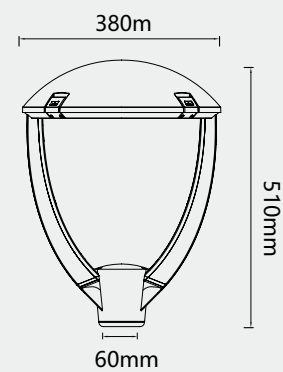


**EAN : 00110020**

LU-STNA-50W

**130lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT              |
|-------------|------------|---------------|---------------|------------------|
| 50W         | 130lm/W    | AC110-277V    | 6500lm        | 3000K Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight         |
| Grey        | 60x145°    | 1 Pcs         | 460*460*240mm | 14kg             |

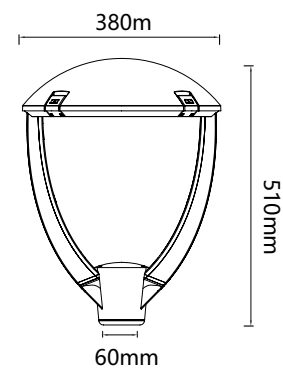


Press-and-push tool free opening



Use of screwdriver is prohibited



Use of screwdriver is prohibited

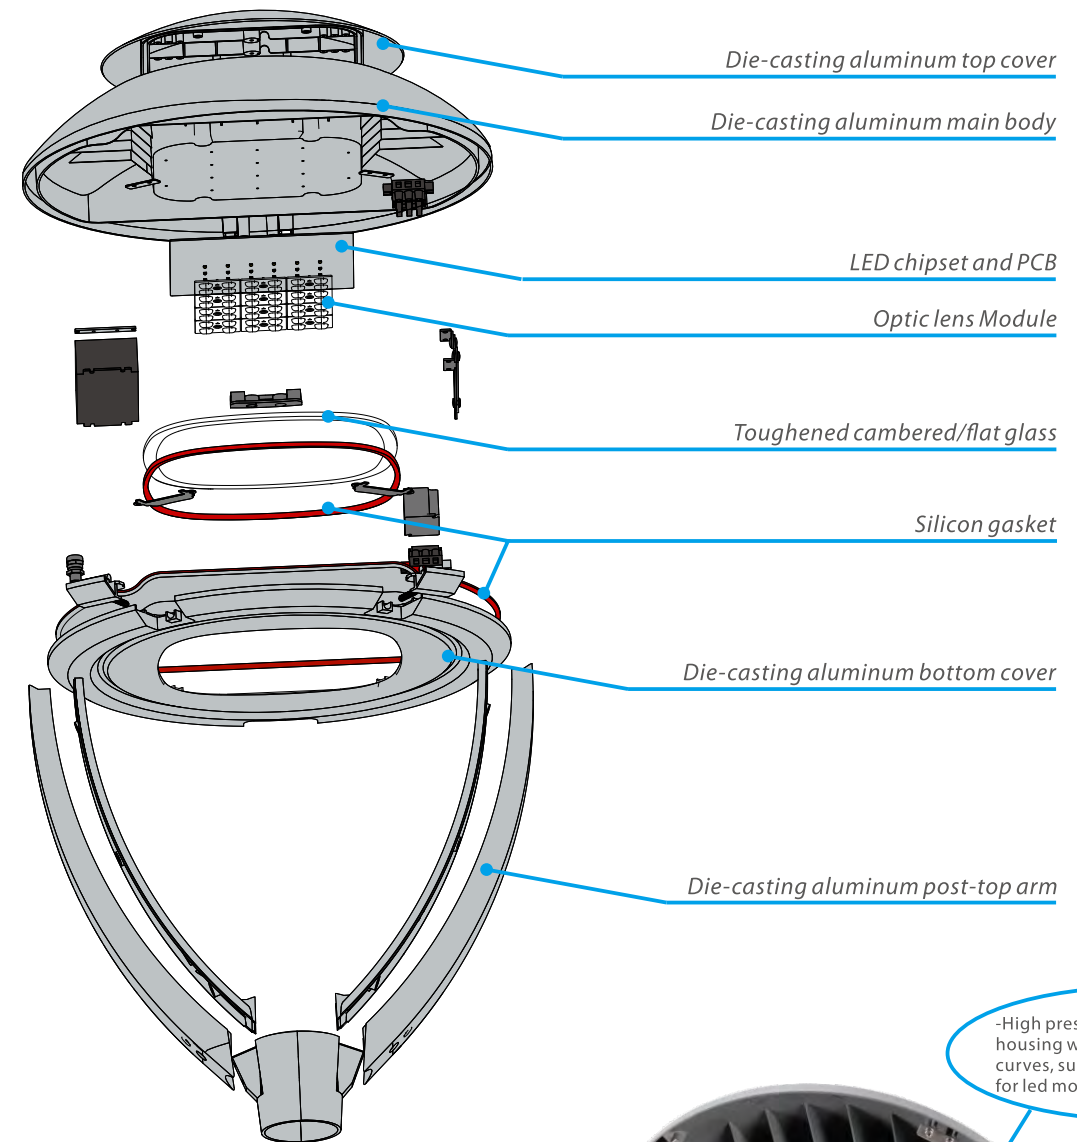



- SMD LED Type the lifetime L70B10>100,000 hours
- Die casting aluminum with good heat-dissipation
- CRI:>80, IP66 protection class
- High Quality **CE Driver ,LUMILEDS Chips**
- AC Input: 110V-277V,50/60Hz
- No Flickering



**IP66**  
RATING

**5**  
YEARS  
Warranty




**EAN : 69012280**

LU-STNB-30W

**130lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT                |
|-------------|------------|---------------|---------------|--------------------|
| 30W         | 130lm/W    | AC110-277V    | 3900lm        | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight           |
| Grey        | 60x145°    | 1 Pcs         | 460*460*190mm | 19kg               |

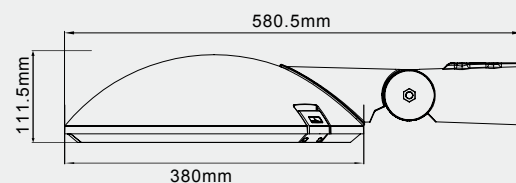


**EAN : 69012297**

LU-STNB-50W

**130lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen       | CCT                |
|-------------|------------|---------------|-------------|--------------------|
| 50W         | 130lm/W    | AC110-277V    | 6500lm      | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size    | G.Weight           |
| Grey        | 60x145°    | 1 Pcs         | 460*460*190 | 19kg               |

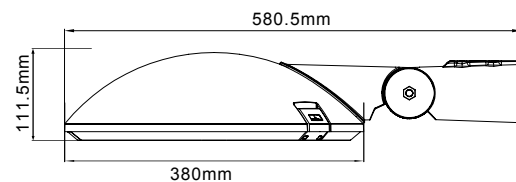

- SMD LED Type the lifetime L70B10>100,000 hours
- Die casting aluminum with good heat-dissipation
- CRI:>80, IP66 protection class
- High Quality **CE Driver ,LUMILEDS Chips**
- AC Input: 110V-277V,50/60Hz
- No Flickering



**IP66**  
RATING

**5**  
YEARS  
Warranty




**EAN : 00110037**

LU-STNA-30W

**130lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT                 |
|-------------|------------|---------------|---------------|---------------------|
| 30W         | 130lm/W    | AC110-277V    | 3900lm        | 3000K<br>Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight            |
| Grey        | 60x145°    | 1 Pcs         | 460*460*190mm | 19kg                |

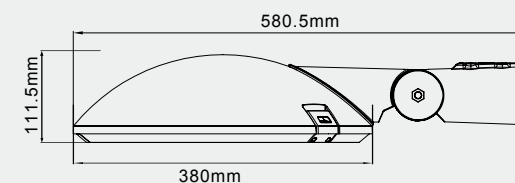


**EAN : 00110044**

LU-STNA-50W

**130lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT                 |
|-------------|------------|---------------|---------------|---------------------|
| 50W         | 130lm/W    | AC110-277V    | 6500lm        | 3000K<br>Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight            |
| Grey        | 60x145°    | 1 Pcs         | 460*460*190mm | 19kg                |

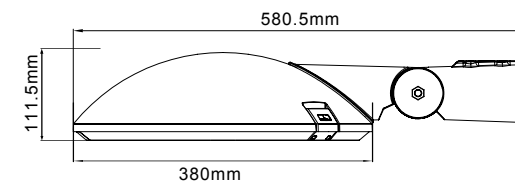

*Light up your life*

[www.luccalight.cz](http://www.luccalight.cz)

**STREET LIGHT**

3



**Whole AL Body**  
Lower temperature  
Longer lifespan

IP67 Waterproof LED Driver

Waterproof Silicon Rubber

Die-casting Aluminum Housing

Aluminum PCB

Toughened Glass Cover

Support Frame

Mounting Arm

**Samsung Chip**  
With high efficiency

- ★Modern design, various choices;
- ★Saves 80% on electricity cost;
- ★Low maintenance; longer lifespan;
- ★Weatherproof body – IP65/67;
- ★Optically optimized glass lenses;
- ★Uniformity in light distribution – maximizes efficiency;
- ★Fully operational in extreme weather
- ★Surge protection, 4KV/5KV;
- ★Pole Size Ø 60mm;

**5 YEARS**  
Warranty



- ▶ SMD LED Type the lifetime L70B10 > 100,000 hours
- ▶ Die casting aluminum with good heat-dissipation
- ▶ CRI: > 80, IP66 protection class
- ▶ High Quality **CE Driver**, **LUMILEDS Chips**
- ▶ AC Input: 110V-277V, 50/60Hz
- ▶ No Flickering



**5 YEARS**  
Warranty




**EAN : 69011757**

LU-CS-50W

**130lm/W**  
High Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 50W         | 130lm/W    | AC110-277V    | 6500lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 120°       | 1 Pcs         | 480*400*190mm | 8kg             |

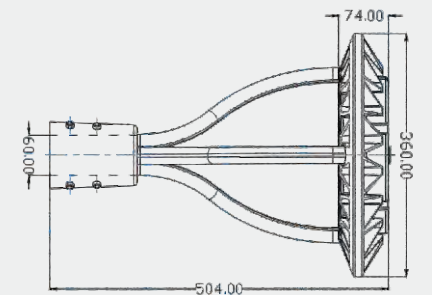


**EAN : 69012303**

LU-CS-50W

**130lm/W**  
High Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen       | CCT              |
|-------------|------------|---------------|-------------|------------------|
| 50W         | 130lm/W    | AC110-277V    | 6500lm      | 3000K Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size    | G.Weight         |
| Black       | 120°       | 1 Pcs         | 480*400*190 | 8kg              |

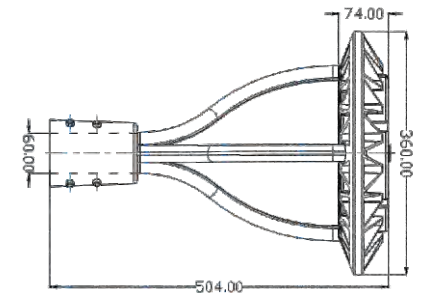





**Samsung Chip**  
With high efficiency



**Meanwell Driver**

- ★Modern design, various choices;
- ★Saves 80% on electricity cost;
- ★Low maintenance; longer lifespan;
- ★Weatherproof body – IP65/67;
- ★Optically optimized glass lenses;
- ★Uniformity in light distribution – maximizes efficiency;
- ★Fully operational in extreme weather
- ★Surge protection, 4KV/5KV;
- ★Pole Size Ø 60mm;

**5 YEARS**  
Warranty



- ▶ SMD LED Type the lifetime is L70B10>60,000 hours
- ▶ Die casting aluminum with good heat-dissipation
- ▶ CRI:>70, IP66 protection class
- ▶ High Quality **Meanwell Driver** ,**Samsung Chips**
- ▶ AC Input: 110V-277V,50/60Hz
- ▶ No Flickering



**5 YEARS**  
Warranty




**EAN : 69011122**

LU-ST-30-30W

**150lm/W**  
Super Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 30W         | 150lm/W    | AC110-277V    | 4500lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Grey        | 70°150°    | 2 Pcs         | 550*240*260mm | 8kg             |

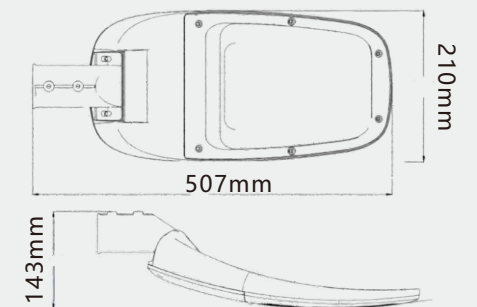


**EAN : 69011337**

LU-ST-30-30W

**150lm/W**  
Super Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT              |
|-------------|------------|---------------|---------------|------------------|
| 30W         | 150lm/W    | AC110-277V    | 4500lm        | 3000K Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight         |
| Grey        | 70°150°    | 2 Pcs         | 550*240*260mm | 8kg              |

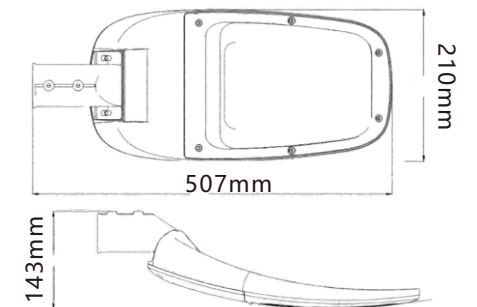


**EAN : 69011139**

LU-ST-30-50W

**150lm/W**  
Super Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 50W         | 150lm/W    | AC110-277V    | 7500lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Grey        | 70°150°    | 2 Pcs         | 550*240*260mm | 8kg             |

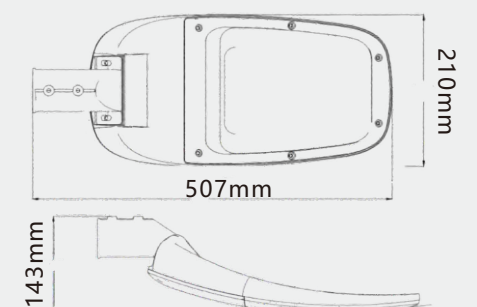





- SMD LED Type the lifetime is L70B10>60,000 hours
- Die casting aluminum with good heat-dissipation
- CRI:>70, IP66 protection class
- High Quality **Meanwell Driver ,Samsung Chips**
- AC Input: 110V-277V,50/60Hz
- No Flickering



**IP66  
RATING**

**5 YEARS  
Warranty**




**EAN : 69011535**

LU-ST-30-50W GREY

**150lm/W**  
Super Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT              |
|-------------|------------|---------------|---------------|------------------|
| 50W         | 150lm/W    | AC110-277V    | 7500lm        | 3000K Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight         |
| Grey        | 70°150°    | 2 Pcs         | 550*240*260mm | 8kg              |

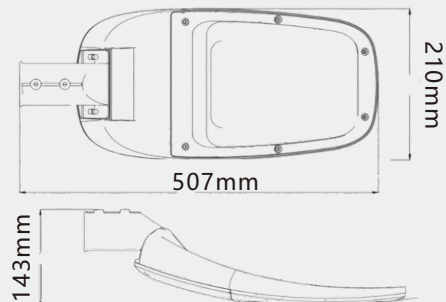


**EAN : 69011146**

LU-ST-30-80W GREY

**150lm/W**  
Super Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 80W         | 150lm/W    | AC110-277V    | 12000lm       | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Grey        | 70°150°    | 1 Pcs         | 680*300*150mm | 5.3kg           |


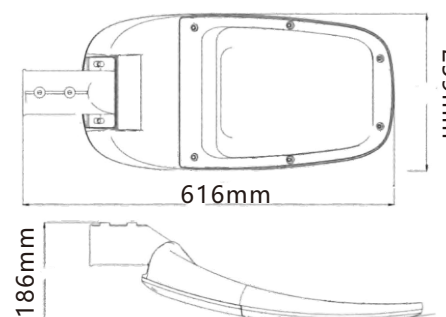


**EAN : 69011344**

LU-ST-30-80W GREY

**150lm/W**  
Super Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT              |
|-------------|------------|---------------|---------------|------------------|
| 80W         | 150lm/W    | AC110-277V    | 12000lm       | 3000K Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight         |
| Grey        | 70°150°    | 1 Pcs         | 680*300*150mm | 5.3kg            |

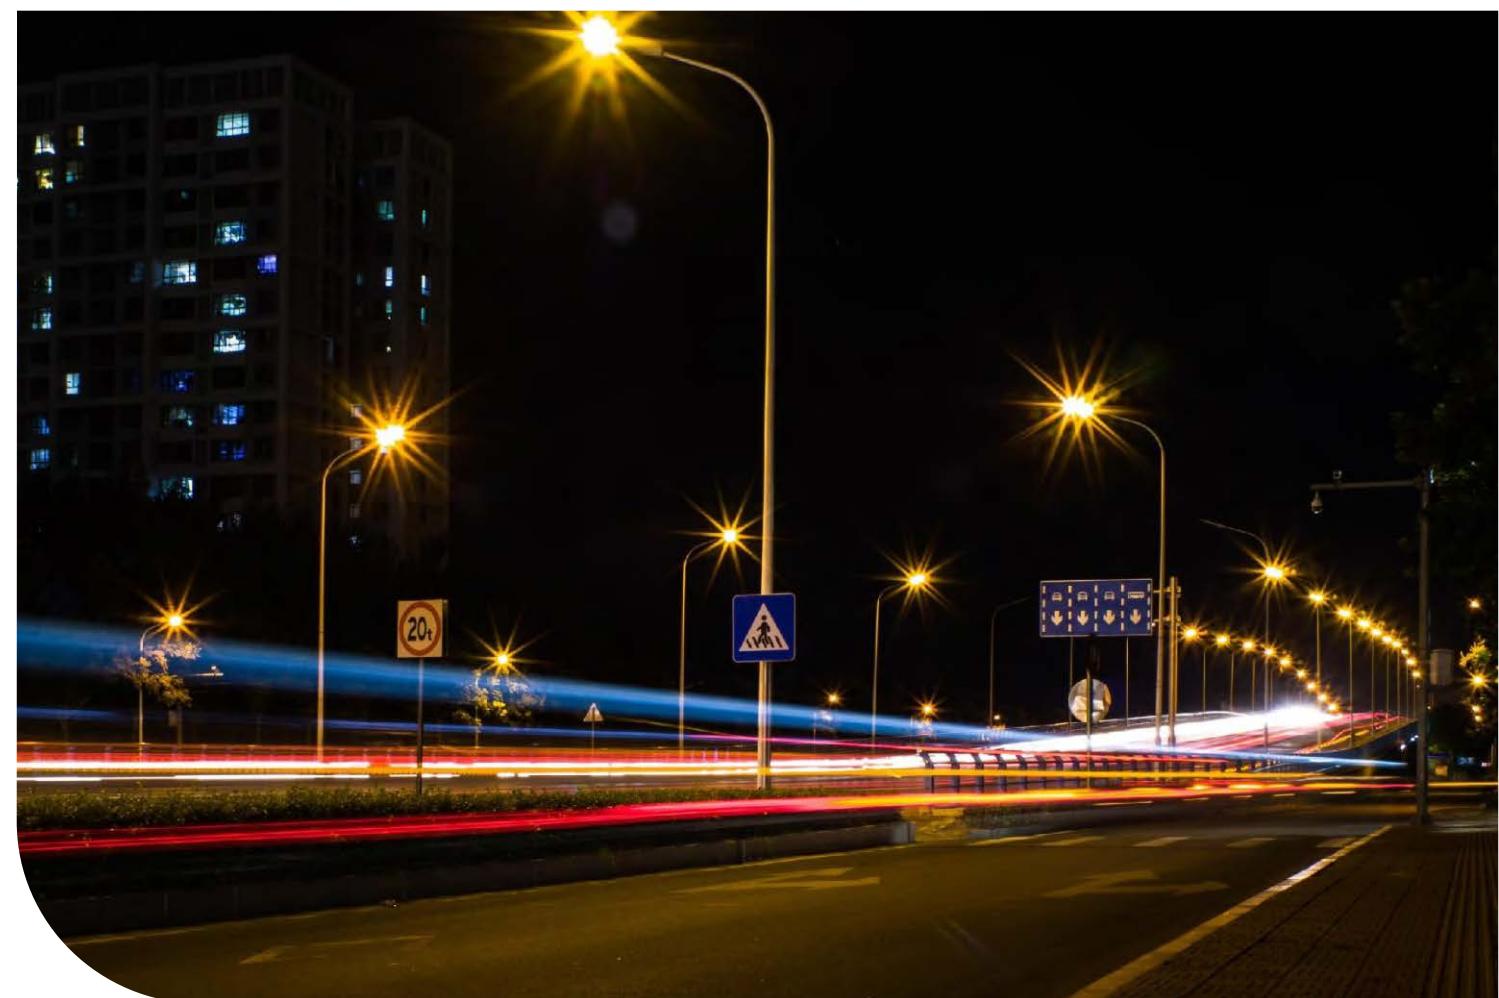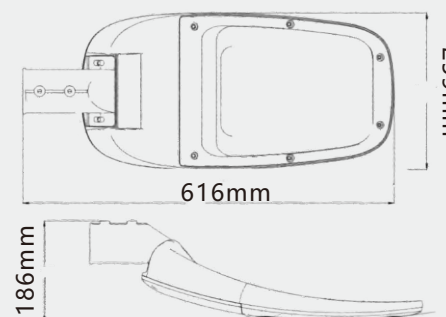

*Light up your life*

[www.luccalight.cz](http://www.luccalight.cz)

**STREET LIGHT**





- ★Modern design, various choices;
- ★Saves 80% on electricity cost;
- ★Low maintenance; longer lifespan;
- ★Weatherproof body – IP66/67;
- ★Optically optimized glass lenses;
- ★Uniformity in light distribution – maximizes efficiency;
- ★Fully operational in extreme weather
- ★Surge protection, 4KV/5KV;
- ★Pole Size Ø 60mm;

**5**  
YEARS  
Warranty



- SMD LED Type the lifetime L70B10>100,000 hours
- Die-casting aluminum Body + PMMA Lens + Toughened Glass Cover
- CRI:>80, IP66 protection class
- High Quality **Hahga Driver** , **LUMILEDS Chips**
- AC Input: 100-305V,50/60Hz**
- No Flickering



**5**  
YEARS  
Warranty




**EAN : 69012822**

LU-STWE-50W

**130lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency  | Input Voltage | Lumen         | CCT             |
|-------------|-------------|---------------|---------------|-----------------|
| 50W         | 130lm/W     | AC100-305V    | 6500lm        | 4000K Day White |
| Finished    | Beam Angle  | Box Qty       | Box Size      | G.Weight        |
| Light Grey  | T2(75X140°) | 1 Pcs         | 540*270*170mm | 3kg             |


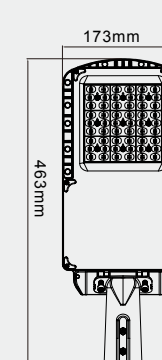


**EAN : 69012839**

LU-STWE-75W

**130lm/W**  
High Lumen Efficiency

| Rated Power | Efficiency  | Input Voltage | Lumen         | CCT             |
|-------------|-------------|---------------|---------------|-----------------|
| 75W         | 130lm/W     | AC100-305V    | 9750lm        | 4000K Day White |
| Finished    | Beam Angle  | Box Qty       | Box Size      | G.Weight        |
| Light Grey  | T2(75X140°) | 1 Pcs         | 630*260*150mm | 4kg             |

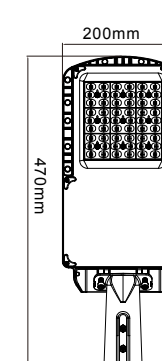


**EAN : 69012846**

LU-STWE-100W

**130lm/W**  
High Lumen Efficiency

| Rated Power | Efficiency  | Input Voltage | Lumen         | CCT             |
|-------------|-------------|---------------|---------------|-----------------|
| 100W        | 130lm/W     | AC100-305V    | 13000lm       | 4000K Day White |
| Finished    | Beam Angle  | Box Qty       | Box Size      | G.Weight        |
| Light Grey  | T2(75X140°) | 1 Pcs         | 670*300*150mm | 5kg             |

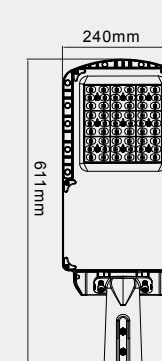



Optional with Photocell Sensor

Die-casting Aluminum Housing

Silicon Rubber

IP65 Waterproof LED Driver

Die-casting Aluminum Housing

Driver Fixed Plate

**Big Rotatable Angle**

Aluminum PCB

**Samsung Chip**  
With high efficiency

Waterproof Silicon Rubber

UV-proof PC Optical Lens

- ★Modern design, various choices;
- ★Saves 80% on electricity cost;
- ★Low maintenance; longer lifespan;
- ★Weatherproof body – IP65/67;
- ★Optically optimized glass lenses;
- ★Uniformity in light distribution – maximizes efficiency;
- ★Fully operational in extreme weather
- ★Surge protection, 4KV/5KV;
- ★Pole Size Ø 60mm;



Fixed Angle



Adjustable Angle



- ▶ SMD LED Type the lifetime is L70B10>60,000 hours
- ▶ Die casting aluminum with good heat-dissipation
- ▶ CRI:>80, IP66 protection class
- ▶ High Quality **Hahga Driver** ,**Samsung Chips**
- ▶ AC Input: 110V-277V,50/60Hz




**EAN : 69012228**

LU-STH-50W

**150lm/W**  
Super Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 50W         | 150lm/W    | AC110-277V    | 7500lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Grey        | 70°140°    | 1 Pcs         | 550*240*120mm | 5kg             |

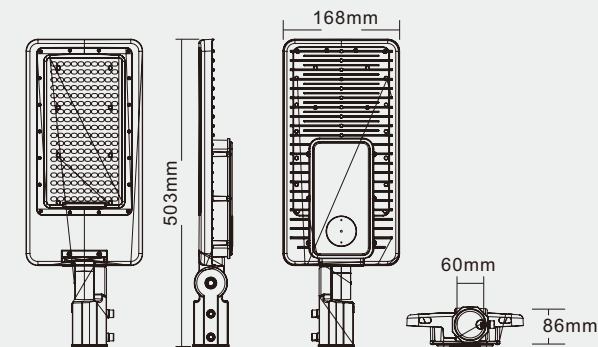





- ▶ SMD LED Type the lifetime is L70B10>60,000 hours
- ▶ Die casting aluminum with good heat-dissipation
- ▶ CRI:>80, IP65 protection class
- ▶ High Quality **Hahga Driver** ,**Samsung Chips**
- ▶ AC Input: 110V-277V,50/60Hz

**180lm/W**  
Ultra Lumen Efficiency



**IP65**  
RATING


**5 YEARS**  
Warranty



**EAN : 69012792**

LUZC-100W-UFO

**180lm/W**  
Ultra Lumen Efficiency

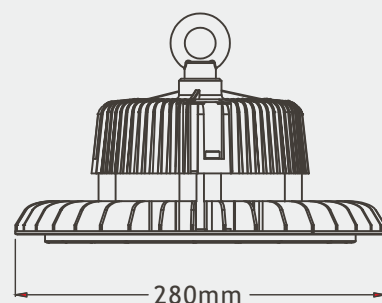


| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 100W        | 180lm/W    | AC110-277V    | 18000lm       | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 120°       | 1 Pcs         | 300*300*150mm | 3.5kg           |

**EAN : 69012808**

LUZC-150W-UFO

**180lm/W**  
Ultra Lumen Efficiency

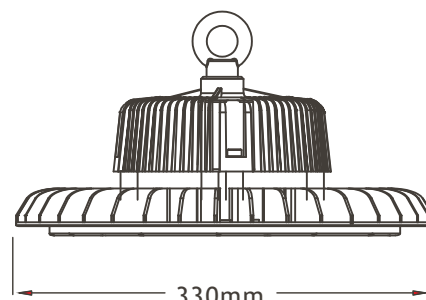


| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 150W        | 180lm/W    | AC110-277V    | 27000lm       | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 120°       | 1 Pcs         | 360*360*150mm | 5kg             |

**EAN : 69012815**

LUZC-200W-UFO



**180lm/W**  
Ultra Lumen Efficiency

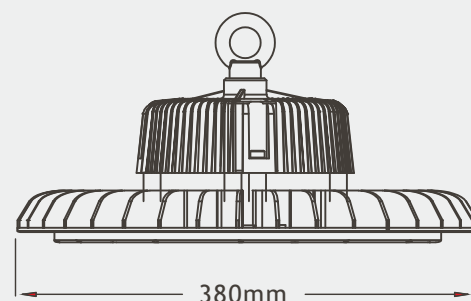

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 200W        | 180lm/W    | AC110-277V    | 36000lm       | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 120°       | 1 Pcs         | 400*400*150mm | 6.5kg           |



**180lm/W**  
Ultra Lumen Efficiency

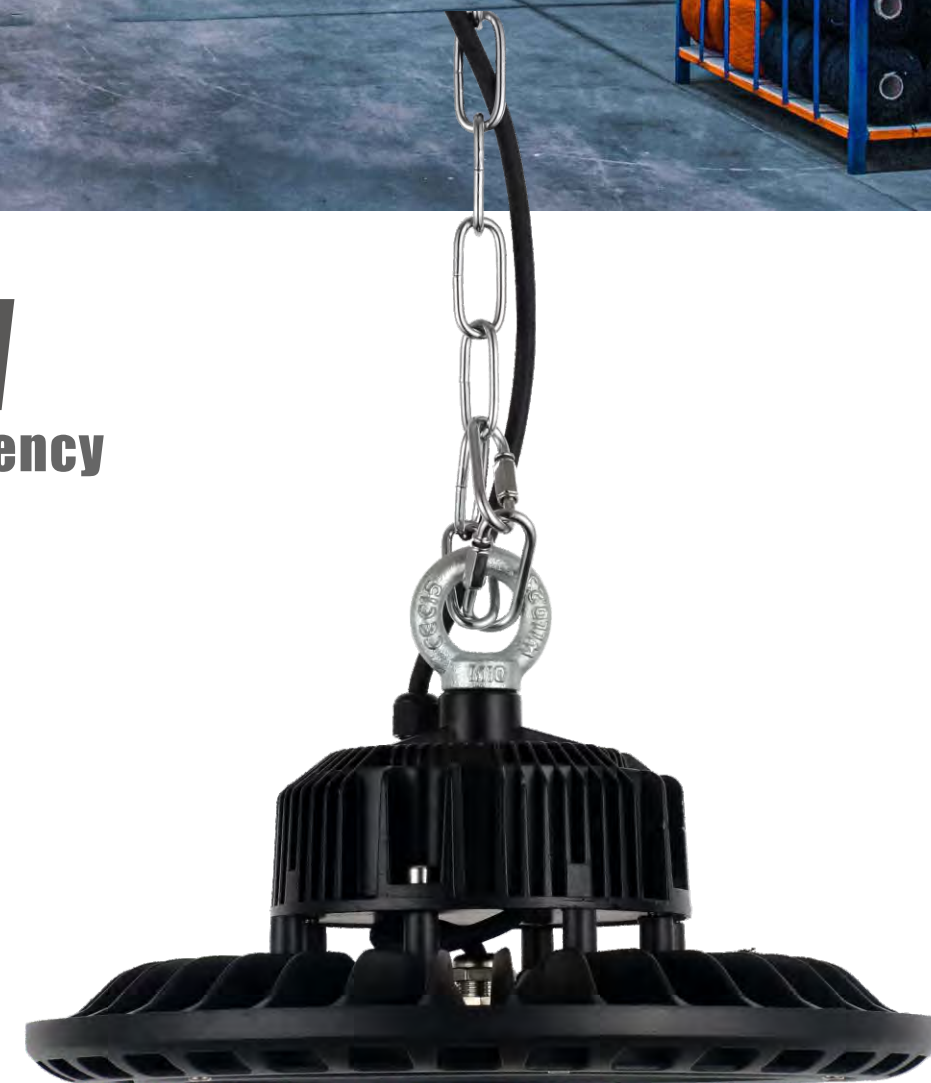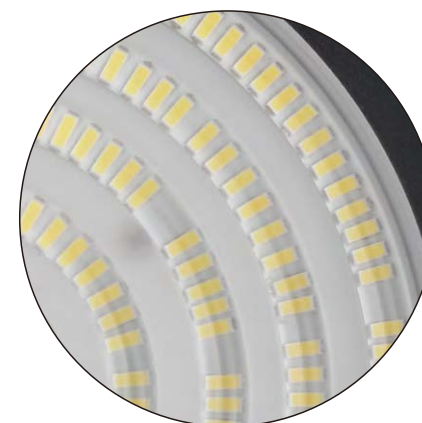

*Light up your life*

www.luccalight.cz


**UFO Highbay**



- ★Powerful LED Light source with a unique design;
- ★Extensive options can replace all types of standard Highbays;
- ★0-10V Dimmable;
- ★Equipped with LIFUD DALI Signal Converter, could be converted to DALI Dimmable.
- ★Replaceable shatter proof PC lens with multiple Beam Angles to choose 90°/ 120°;
- ★High thermal conductivity, low luminous decay, pure colours & no heavy shade;
- ★The unique design perfectly hence diffuses the heat conduction efficiently which reduces the temperature of inside lamp;
- ★PC Shade & PC Bottom Cover optional;

**5 YEARS**  
Warranty

**Samsung Chip**  
With high efficiency



- ▶ SMD LED Type the lifetime is L70B10>60,000 hours
- ▶ Die casting aluminum with good heat-dissipation
- ▶ CRI:>80, IP65 protection class
- ▶ High Quality **Hahga Driver** ,**Samsung Chips**
- ▶ AC Input: 110V-277V,50/60Hz



**5 YEARS**  
Warranty



**EAN : 69012198**

LUZC-100W-UFO

**160lm/W**  
Super Lumen Efficiency

**0-10V**  
Dimmable

Rated Power Efficiency

100W

160lm/W

Input Voltage

AC110-277V

Lumen

16000lm

CCT

4000K  
Day White

Finished

Black

Beam Angle

120°

Box Qty

1 Pcs

Box Size


300\*300\*150mm

G.Weight

3.5kg

**Hahga** Driver

**SAMSUNG** Chips

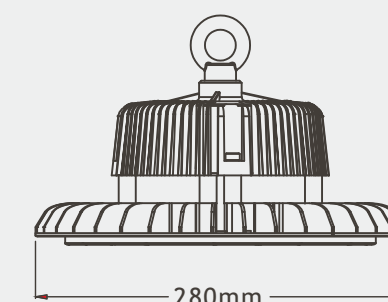

**EAN : 69012211**

LUZC-150W-UFO

**160lm/W**  
Super Lumen Efficiency

**0-10V**  
Dimmable

Rated Power Efficiency

150W

160lm/W

Input Voltage

AC110-277V

Lumen

24000lm

CCT

4000K  
Day White

Finished

Black

Beam Angle

120°

Box Qty

1 Pcs

Box Size


360\*360\*150mm

G.Weight

5kg

**Hahga** Driver

**SAMSUNG** Chips

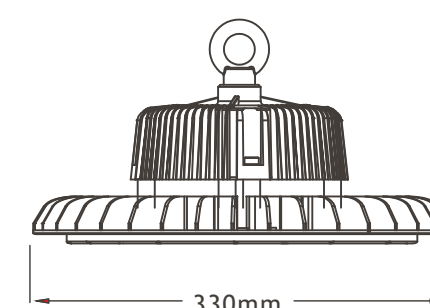

**EAN : 69012204**

LUZC-200W-UFO

**160lm/W**  
Super Lumen Efficiency

**0-10V**  
Dimmable

Rated Power Efficiency

200W

160lm/W

Input Voltage

AC110-277V

Lumen

32000lm

CCT

4000K  
Day White

Finished

Black

Beam Angle

120°

Box Qty

1 Pcs

Box Size


400\*400\*150mm

G.Weight

6.5kg

**Hahga** Driver

**SAMSUNG** Chips

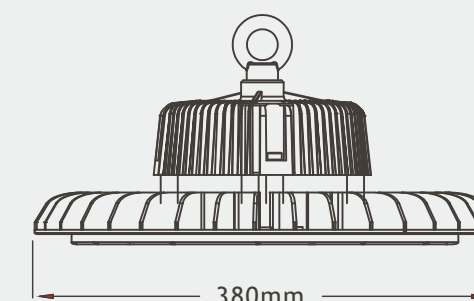





- SMD LED Type the lifetime is L70B10>60,000 hours
- Die casting aluminum with good heat-dissipation
- CRI:>80, IP65 protection class
- High Quality **Hahga Driver** ,**Samsung Chips**
- AC Input: 110V-277V,50/60Hz
- Smart DALI-2 Dimming



**IP65**  
RATING

**5**  
YEARS  
Warranty



**EAN : 69012457**


LUZC-100W-UFO

**160lm/W**  
Super Lumen Efficiency  
**DALI Dimmable**

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 100W        | 160lm/W    | AC110-277V    | 16000lm       | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 120°       | 1 Pcs         | 300*300*150mm | 3.4kg           |



DALI Signal Converter

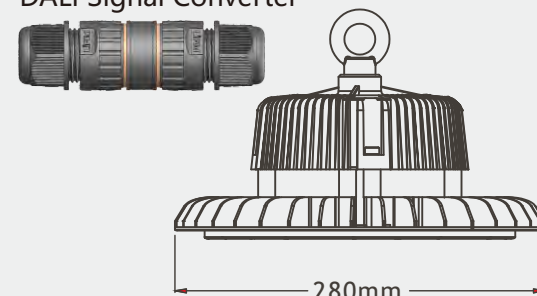

**EAN : 69012464**


LUZC-150W-UFO

**160lm/W**  
Super Lumen Efficiency  
**DALI Dimmable**

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 150W        | 160lm/W    | AC110-277V    | 24000lm       | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 120°       | 1 Pcs         | 360*360*150mm | 5kg             |



DALI Signal Converter

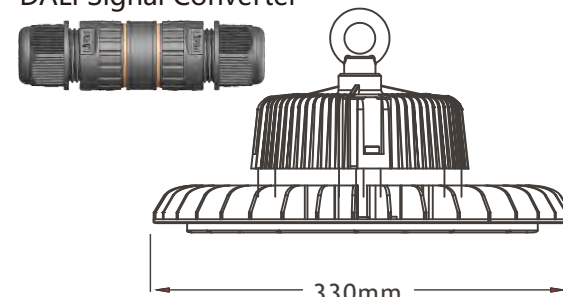

**EAN : 69012471**




LUZC-200W-UFO

**160lm/W**  
Super Lumen Efficiency  
**DALI Dimmable**

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 200W        | 160lm/W    | AC110-277V    | 32000lm       | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 120°       | 1 Pcs         | 400*400*150mm | 6.5kg           |



DALI Signal Converter

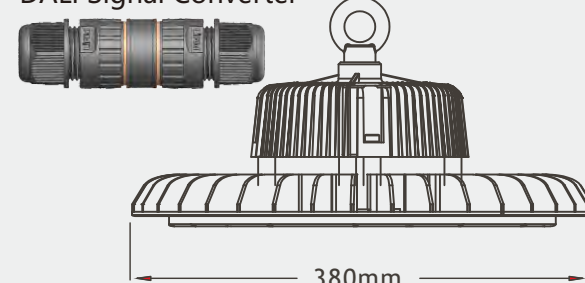

*Light up your life*

www.luccalight.cz

**UFO HIGHBAY**






- ★High practical modern wall lights in stylish designs;
- ★Equipped with Samsung LED Chips, CE Driver;
- ★Life Span >60,000 hours (Ta=30°C@L70);
- ★Rotatable: 0~90° rotatable;
- ★Easy installation;

**5**  
YEARS  
Warranty

**Samsung Chip**  
With high efficiency



- SMD LED Type the lifetime is L70B10>60,000 hours
- Die casting aluminum with good heat-dissipation
- CRI:>80, IP66 protection class
- High Quality **CE Driver** ,**Samsung Chips**
- AC Input: 110V-277V,50/60Hz



**5**  
YEARS  
Warranty






**EAN : 69012310**

LU-WLR-30W

**130lm/W**  
High Lumen Efficiency




| Rated Power | Efficiency | Input Voltage | Lumen         | CCT                |
|-------------|------------|---------------|---------------|--------------------|
| 30W         | 130lm/W    | AC110-277V    | 3900lm        | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight           |
| Black       | 90°65°     | 6 Pcs         | 420*400*260mm | 3.5kg              |

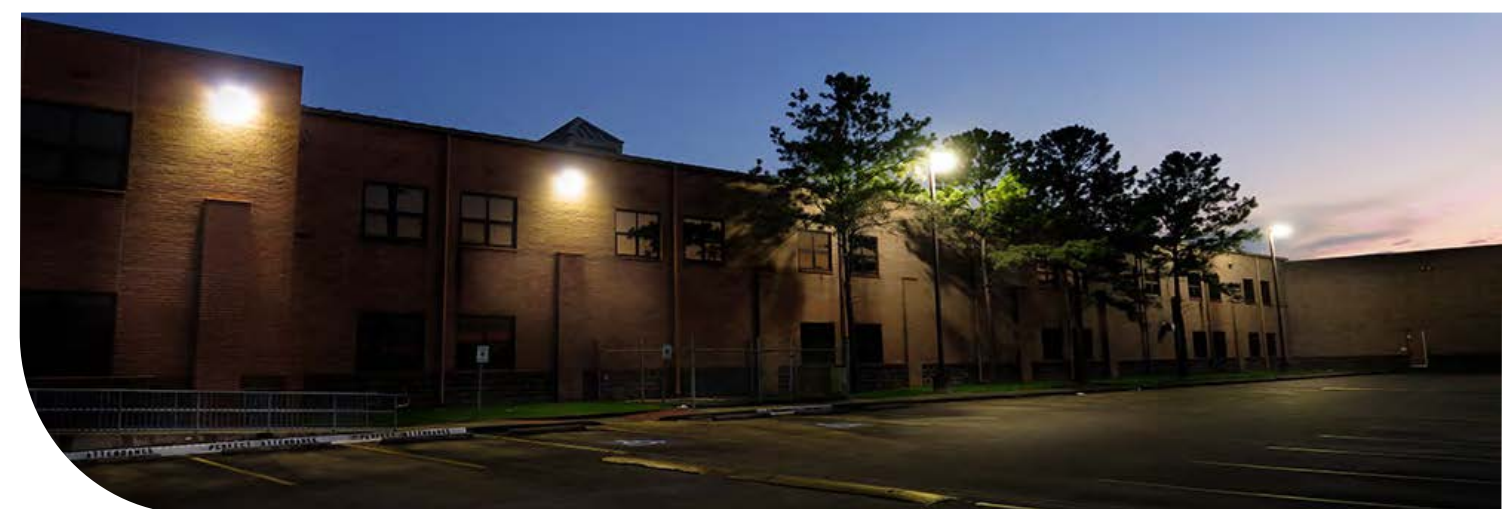





- SMD LED Type the lifetime is L70B10>60,000 hours
- Die casting aluminum with good heat-dissipation
- CRI:>80, IP66 protection class
- High Quality **Hahga Driver** , **Epistar Chips**
- AC Input: 100V-277V,50/60Hz

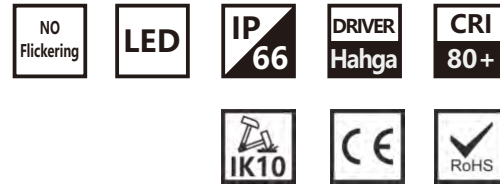


**EAN : 69012914**

LU-FLE-20W

**120lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 20W         | 120lm/W    | AC100-277V    | 2400lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 120°       | 30 Pcs        | 470*245*310mm | 1.1kg           |




**EAN : 69012921**

LU-FLE-30W

**120lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 30W         | 120lm/W    | AC100-277V    | 3600lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 120°       | 20 Pcs        | 420*270*390mm | 1.3kg           |

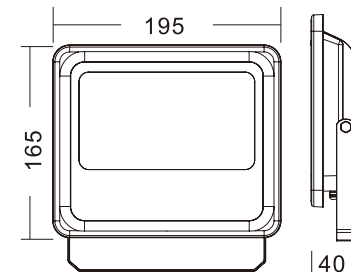


**EAN : 69012938**

LU-FLE-50W

**120lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 50W         | 120lm/W    | AC100-277V    | 6000lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 120°       | 15 Pcs        | 725*345*230mm | 1.7kg           |

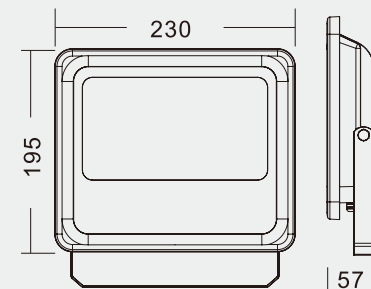

Iron Bracket

Die-casting Aluminum Housing

Aluminum PCB

2835/3030 SMD LED Chips


IP66 Waterproof LED Driver

PC Reflector

Waterproof Silicon Rubber

Tempered Glass

Aluminum Frame

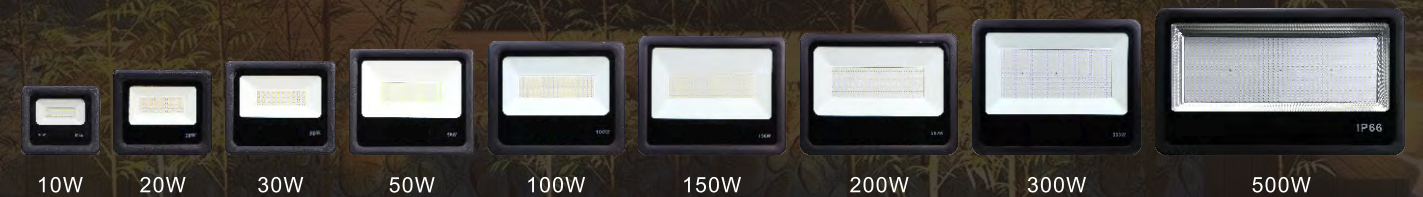






Meanwell Driver

Samsung Chip  
With high efficiency



- ▶ SMD LED Type the lifetime is L70B10>60,000 hours
- ▶ Die casting aluminum with good heat-dissipation
- ▶ CRI:>80, IP65 protection class
- ▶ High Quality **Meanwell Driver** ,**Samsung Chips**
- ▶ AC Input: 110V-277V,50/60Hz
- ▶ No Flickering

**IP66**  
RATING

**5**  
YEARS  
Warranty

NO Flickering

LED

IP 66

DRIVER MW

CRI 80+

IK10

CE


RoHS

EAN : 69012990


LU-LT-100W  
**140lm/W**  
High Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 100W        | 140lm/W    | AC110-277V    | 14000lm       | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 90°        | 1 Pcs         | 360*280*180mm | 10kg            |

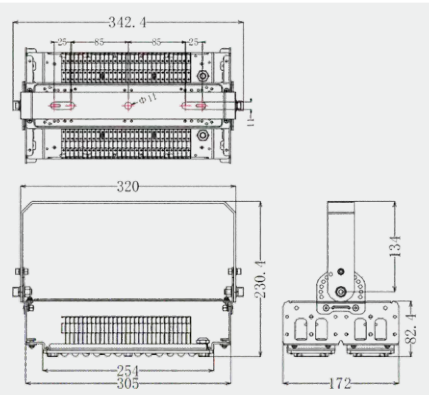

| Power              | EAN No.  | Pic | Lumen    | Driver                 | LED Module                                | DALI-2 Function                                 |
|--------------------|----------|-----|----------|------------------------|-------------------------------------------|-------------------------------------------------|
| 100W               | 69012990 |     | 14000lm  | 100W Meanwell Driver   | 1* LU-LT-100W<br>EAN: 69012990            | Optional<br>1*100W DALI Driver<br>EAN: 68018719 |
| 200W               |          |     | 28000lm  | 2*100W Meanwell Driver | 2* LU-LT-100W<br>EAN: 69012990 +Connector | Optional<br>2*100W DALI Driver<br>EAN: 68018719 |
| 300W               |          |     | 42000lm  | 3*100W Meanwell Driver | 3* LU-LT-100W<br>EAN: 69012990 +Connector | Optional<br>3*100W DALI Driver<br>EAN: 68018719 |
| 400W               |          |     | 56000lm  | 4*100W Meanwell Driver | 4* LU-LT-100W<br>EAN: 69012990 +Connector | Optional<br>4*100W DALI Driver<br>EAN: 68018719 |
| 500W               |          |     | 60000lm  | 5*100W Meanwell Driver | 5* LU-LT-100W<br>EAN: 69012990 +Connector | Optional<br>5*100W DALI Driver<br>EAN: 68018719 |
| 600W               |          |     | 84000lm  | 6*100W Meanwell Driver | 6* LU-LT-100W<br>EAN: 69012990 +Connector | Optional<br>6*100W DALI Driver<br>EAN: 68018719 |
| 700W               |          |     | 98000lm  | 7*100W MW Driver       | 7*LU-LT-100W                              | 7*DALI Driver                                   |
| 800W               |          |     | 112000lm | 8*100W MW Driver       | 8*LU-LT-100W                              | 8*DALI Driver                                   |
| 900W               |          |     | 126000lm | 9*100W MW Driver       | 9*LU-LT-100W                              | 9*DALI Driver                                   |
| 1000W              |          |     | 140000lm | 10*100W MW Driver      | 10*LU-LT-100W                             | 10*DALI Driver                                  |
| More Connect + + + |          |     |          |                        |                                           |                                                 |

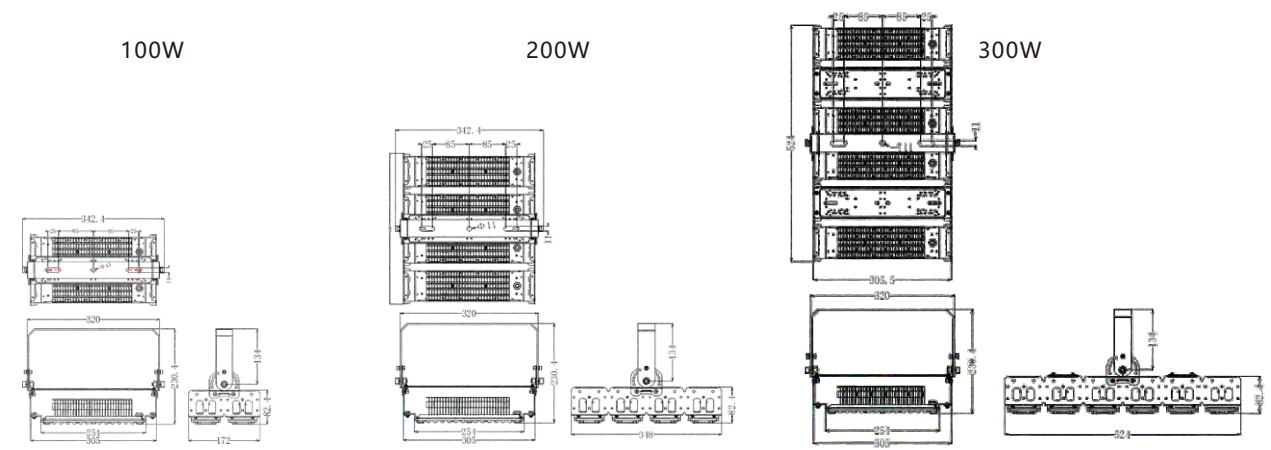





★ Built with a tough, air-tight enclosure allowing it to resist jets of water and dust — an essential feature for outdoor lighting & Industry lighting.

- ★ Low consumption; More than 80% saving of the power
- ★ Low light decay, Long lifetime 50,000Hours
- ★ Water-proof, Dust-proof, Damp-proof, Vapor-proof, IP66
- ★ High impact test, IK10
- ★ Self-wiring connection/ Linkable.
- ★ Easy to install

**5 YEARS**  
**Warranty**



- ▶ SMD LED Type the lifetime is 50,000 hours
- ▶ PC housing + PC Diffuser
- ▶ CRI:>80, IP66 protection class
- ▶ High Quality No Flickering **Philips Driver**
- ▶ AC Input: 220V-240V,50/60Hz
- ▶ No Flickering, **Series Linkable** with wire through function



**5 YEARS**  
**Warranty**




**EAN : 69011313**

LU-TPB-40W(PRO)

**150lm/W**  
Ultra- Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT                |
|-------------|------------|---------------|----------------|--------------------|
| 40W         | 150lm/W    | AC220-240V    | 6000lm         | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight           |
| Grey        | 120°       | 9 Pcs         | 1280*320*290mm | 17kg               |

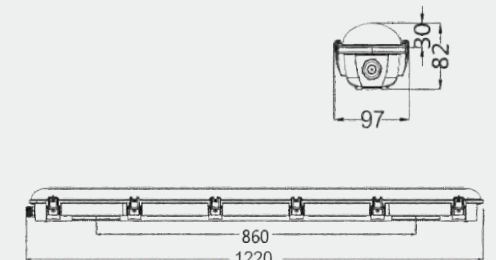


**EAN : 69011436**

LU-TPB-60W(PRO)

**150lm/W**  
Ultra- Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT                |
|-------------|------------|---------------|----------------|--------------------|
| 60W         | 150lm/W    | AC220-240V    | 9000lm         | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight           |
| Grey        | 120°       | 9 Pcs         | 1540*320*290mm | 23kg               |

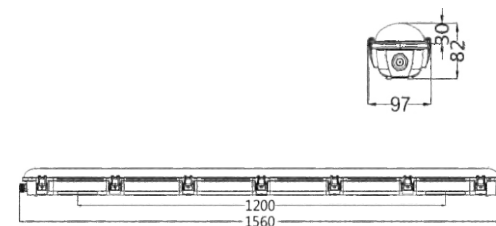





- SMD LED Type the lifetime is 50,000 hours
- PC housing + PC Diffuser
- CRI:>80, IP66 protection class
- High Quality No Flickering **Philips Driver**
- AC Input: 220V-240V,50/60Hz
- No Flickering, **Series Linkable** with wire through function



**5 YEARS**  
Warranty




**EAN : 69010224**

LU-TPB-40W

**130lm/W**  
Super- Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 40W         | 130lm/W    | AC220-240V    | 5200lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Grey        | 120°       | 9 Pcs         | 1250*320*260mm | 17kg            |

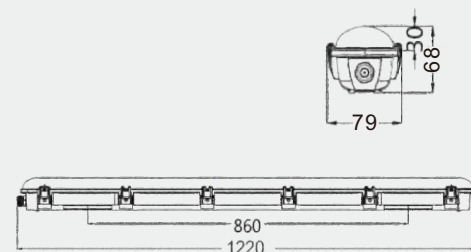



**EAN : 69012686**

LU-TPB-55W

**130lm/W**  
Super- Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 55W         | 130lm/W    | AC220-240V    | 7150lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Grey        | 120°       | 9 Pcs         | 1550*320*260mm | 20kg            |

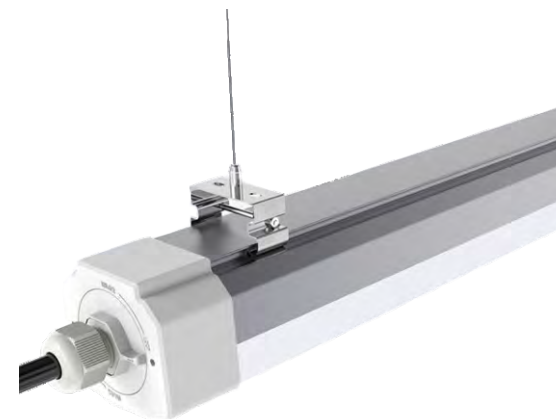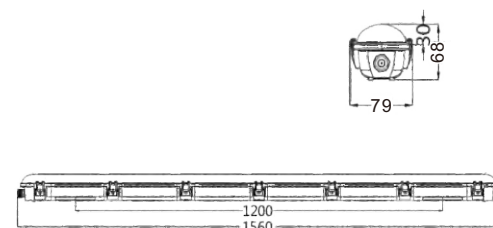

- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>80, IP66 protection class
- High Quality **Hahga Driver / Osram Driver**
- AC Input: 220V-240V,50/60Hz
- No Flickering, **Series Linkable**



**5 YEARS**  
Warranty




**EAN : 69011818**

LU-TPC(PRO)-120-40W

**130lm/W**  
Super- Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 40W         | 130lm/W    | AC220-240V    | 5200lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Grey        | 120°       | 9 Pcs         | 1310*270*310mm | 12kg            |

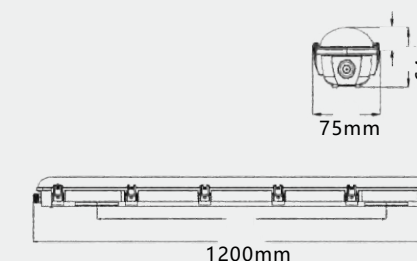


**EAN : 69011832**

LU-TPC(PRO)-150-60W

**130lm/W**  
Super- Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 60W         | 130lm/W    | AC220-240V    | 7800lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Grey        | 120°       | 9 Pcs         | 1610*270*310mm | 15kg            |

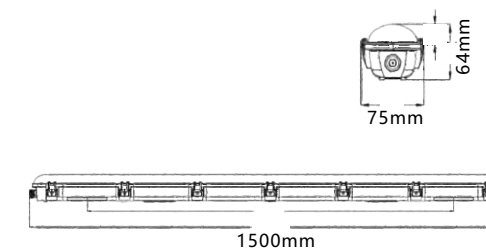

*Light up your life*

www.luccalight.cz

**TRIPROOF LIGHT**

16





- SMD LED Type the lifetime is 50,000 hours
- PC housing + PC Diffuser, stable form
- 160lm/W with 120W, upto 20,000lm output
- CRI:>80, IP66 protection class
- High Quality **Philips Driver**
- AC Input: 220V-240V,50/60Hz
- No Flickering, **Series Linkable**

**Wire-Through**  
Connection

**IP66**  
RATING

**5**  
YEARS  
Warranty

LED

NO  
Flickering

IP  
66

DRIVER  
Philips

CRI  
80+

CE

RoHS

IK10

120°

120°

**EAN : 69012693**


LU-TPW-120W

**160lm/W**  
Ultra Lumen Efficiency

**PHILIPS** Driver

**SAMSUNG** Chips

|             |            |               |              |                    |
|-------------|------------|---------------|--------------|--------------------|
| Rated Power | Efficiency | Input Voltage | Lumen        | CCT                |
| 120W        | 160lm/W    | AC220-240V    | 20000lm      | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size     | G.Weight           |
| Grey        | 120°       | 1 Pcs         | 1250*280*110 | 8kg                |

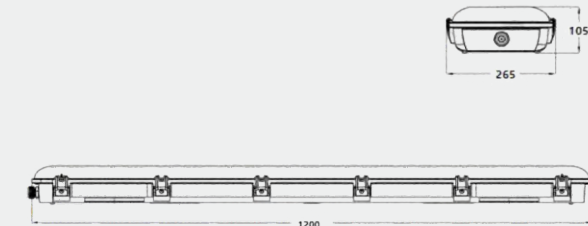

**Big Size** 1200\*265mm  
**High Power** upto 120W  
**High Lumen** upto 20000LM

**TRIPROOF LIGHT**







## ALL IN ONE

12-42W Wattage Switchable  
4 wire 3 phase  
use for EU standard track rail

- SMD LED Type the lifetime is 50,000 hours
- 4 wire 3 phase track, **Rotatable 350°**
- CRI: >90, IP20 protection class
- High Quality **Switchable KGP Driver**
- AC Input: 200V-240V, 50/60Hz
- No Flickering
- **Wattage Switchable From 12W to 42W**



**5 YEARS**  
Warranty

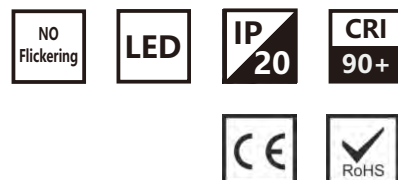


**EAN : 69012785**

LU-TRX(BLACK)




| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 12-42W      | 100lm/W    | AC220-240V    | 1200-4200lm   | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| Black       | 45°        | 20 Pcs        | 470*380*410mm | 18kg            |



- SMD LED Type the lifetime is 50,000 hours
- 4 wire 3 phase track, **Rotatable 350°**
- CRI: >90, IP20 protection class
- High Quality **CE Driver**
- AC Input: 200V-240V, 50/60Hz
- No Flickering
- **Wattage Switchable From 12W to 42W**



**5 YEARS**  
Warranty

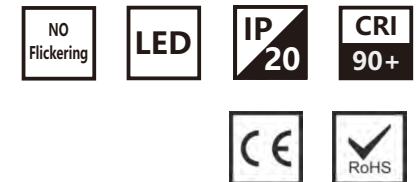


**EAN : 69012778**

LU-TRX(WHITE)




| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 12-42W      | 100lm/W    | AC220-240V    | 1200-4200lm   | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 45°        | 20 Pcs        | 470*380*410mm | 18kg            |

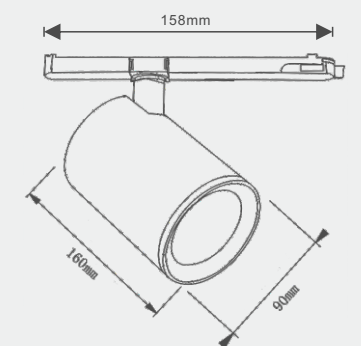

## POWER SWITCH LIST

| Pout [W] | Iout [mA] | λ     | 1 | 2  | 3  | 4  | Pout [W] | Iout [mA] | λ     | 1  | 2  | 3  | 4  |
|----------|-----------|-------|---|----|----|----|----------|-----------|-------|----|----|----|----|
| 12.6     | 300       | 0.86C | - | -  | -  | -  | 29.4     | 700       | 0.94C | ON | -  | -  | -  |
| 14.7     | 350       | 0.87C | - | -  | -  | ON | 31.5     | 750       | 0.94C | ON | -  | -  | ON |
| 16.8     | 400       | 0.88C | - | -  | ON | -  | 33.6     | 800       | 0.95  | ON | -  | ON | -  |
| 18.9     | 450       | 0.89C | - | -  | ON | ON | 34       | 850       | 0.95  | ON | -  | ON | ON |
| 21       | 500       | 0.90C | - | ON | -  | -  | 36       | 900       | 0.96  | ON | ON | -  | -  |
| 23.1     | 550       | 0.91C | - | ON | -  | ON | 38       | 950       | 0.96  | ON | ON | -  | ON |
| 25.2     | 600       | 0.92C | - | ON | ON | -  | 40       | 1000      | 0.97  | ON | ON | ON | -  |
| 27.3     | 650       | 0.93C | - | ON | ON | ON | 42       | 1050      | 0.97  | ON | ON | ON | ON |

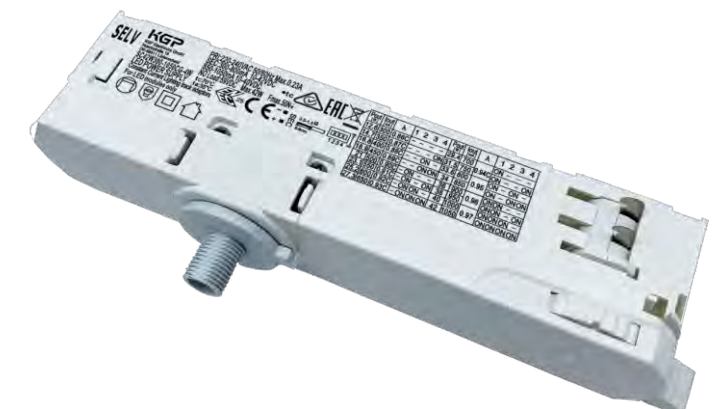

\*Black Lamp with Black Driver box  
\*White Lamp with White Driver box



Light up your life

www.luccalight.cz

TRACK LIGHT





- ★LUCCA present new generation 4 wires 3 phase LED track lights, with various fashionable appearance optional and functions optional:
- ★Remote control CCT dimmable, Beam angle Zoomable 15°~60, CCT Triple Switch, etc.
- ★LUCCA's extensive range of modern LED Track Lights are the perfect ecological alternative to old, inefficient Halogen lights;
- ★Delivering high performance, excellent durability and remarkable light output to serve the general Commercial and Retail market;
- ★The >90 CRI rating of these track lights provide vivid colors, highly enhancing any product's appeal to consumers;



**5 YEARS**  
Warranty



- SMD LED Type the lifetime is 50,000 hours
- 4 wire 3 phase track, **Rotatable 0°-90°**
- CRI:>90, IP20 protection class
- High Quality **Bridgelux Chips**
- AC Input: 200V-240V, 50/60Hz
- No Flickering Build-in Driver, **UGR<19**



**5 YEARS**  
Warranty




**EAN : 69012372**

LUJB-TR252-35W

**UGR<19**  
Microprismatic Diffuser



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 35W         | 80lm/W     | AC220-240V    | 2800lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 30°        | 12 Pcs        | 600*290*280mm | 16kg            |

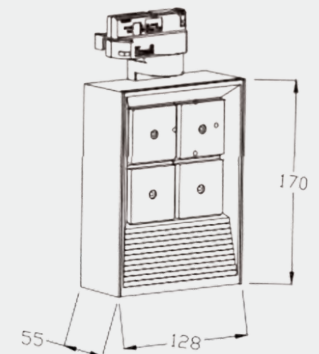

**5 YEARS**  
Warranty




**EAN : 69012365**

LUJB-TR160-30W

**UGR<19**  
Microprismatic Diffuser



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 30W         | 80lm/W     | AC220-240V    | 2400lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 30°        | 10 Pcs        | 570*420*200mm | 6kg             |

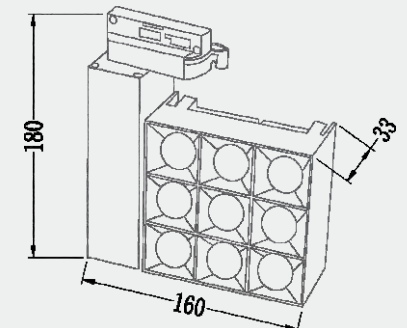






- ▶ SMD LED Type the lifetime is 50,000 hours
- ▶ 4 wire 3 phase track, **Rotatable 350°**
- ▶ CRI: >90, IP20 protection class
- ▶ High Quality **CE Driver**
- ▶ AC Input: 200V-240V, 50/60Hz
- ▶ No Flickering
- ▶ **0-10V Dimmable, CCT Switch, Beam Angle Zooming**



**5 YEARS**  
Warranty

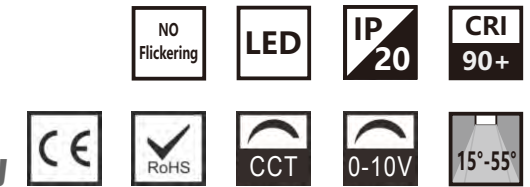


**EAN : 69012761**

LU-FT1062B **BLACK**

**ALL** 0-10V Dimmable  
**CCT Switch**  
**IN ONE** Beam Angle Zooming


| Rated Power | Efficiency        | Input Voltage | Lumen         | CCT                           |
|-------------|-------------------|---------------|---------------|-------------------------------|
| 25W         | 80lm/W            | AC220-240V    | 2000lm        | 2700/3000/4000K<br>Switchable |
| Finished    | Beam Angle        | Box Qty       | Box Size      | G.Weight                      |
| Black       | 15-55°<br>Zooming | 12 Pcs        | 500*400*300mm | 14.5kg                        |

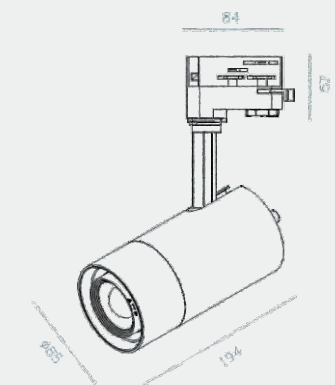

- ▶ SMD LED Type the lifetime is 50,000 hours
- ▶ 4 wire 3 phase track, **Rotatable 350°**
- ▶ CRI: >90, IP20 protection class
- ▶ High Quality **CE Driver**
- ▶ AC Input: 200V-240V, 50/60Hz
- ▶ No Flickering
- ▶ **0-10V Dimmable, CCT Switch, Beam Angle Zooming**



**5 YEARS**  
Warranty

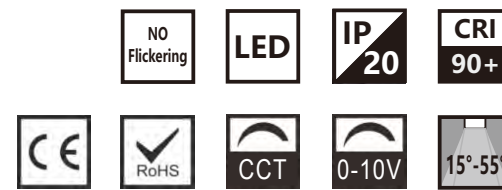


**EAN : 69012044**

LU-FT1062W **WHITE**

**ALL** 0-10V Dimmable  
**CCT Switch**  
**IN ONE** Beam Angle Zooming

| Rated Power | Efficiency        | Input Voltage | Lumen         | CCT                           |
|-------------|-------------------|---------------|---------------|-------------------------------|
| 25W         | 80lm/W            | AC220-240V    | 2000lm        | 2700/3000/4000K<br>Switchable |
| Finished    | Beam Angle        | Box Qty       | Box Size      | G.Weight                      |
| White       | 15-55°<br>Zooming | 12 Pcs        | 500*400*330mm | 14.5kg                        |

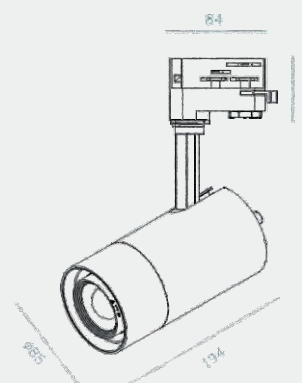

★ 0-10V Dimmable

★ CCT Triple Switch Dimmable  
(2700K-3000K-4000K)



★ Zooming Dimmable  
(15°-55°)

★ Anti-Glare  
Honeycomb available



*Light up your life*

www.luccalight.cz

**TRACK LIGHT**

20






**LUCCA**  
Light up your life



- ▶ SMD LED Type the lifetime is 50,000 hours
- ▶ 4 wire 3 phase track, **Rotatable 350°**
- ▶ CRI: >90, IP20 protection class
- ▶ High Quality **CE Driver**
- ▶ AC Input: 200V-240V, 50/60Hz
- ▶ No Flickering



**5**  
YEARS  
Warranty




**EAN : 69012259**

LU-TR301(WHITE)



**UGR<19**  
Microprismatic Diffuser


| Rated Power | Efficiency | Input Voltage | Lumen         | CCT                |
|-------------|------------|---------------|---------------|--------------------|
| 30W         | 85lm/W     | AC220-240V    | 2550lm        | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight           |
| White       | 38°        | 12 Pcs        | 520*470*250mm | 15kg               |

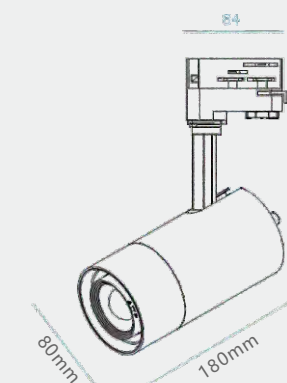

- ▶ SMD LED Type the lifetime is 50,000 hours
- ▶ 4 wire 3 phase track, **Rotatable 350°**
- ▶ CRI: >90, IP20 protection class
- ▶ High Quality **CE Driver**
- ▶ AC Input: 200V-240V, 50/60Hz
- ▶ No Flickering



**5**  
YEARS  
Warranty




**EAN : 69011788**

LU-TR301 (BLACK)



**UGR<19**  
Microprismatic Diffuser

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT                |
|-------------|------------|---------------|---------------|--------------------|
| 30W         | 85lm/W     | AC220-240V    | 2550lm        | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight           |
| Black       | 38°        | 12 Pcs        | 520*470*250mm | 15kg               |

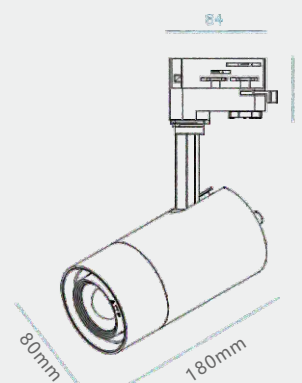


Light up your life

www.luccalight.cz

**TRACK LIGHT**



# LUCCA OFFICE LED LINEAR LIGHT



**Dark Performance**  
(UGR<16)  
[34°]





EAN : 69011245  
EAN : 69011580




EAN : 69012426  
EAN : 69012433



EAN : 69012105  
EAN : 69012129

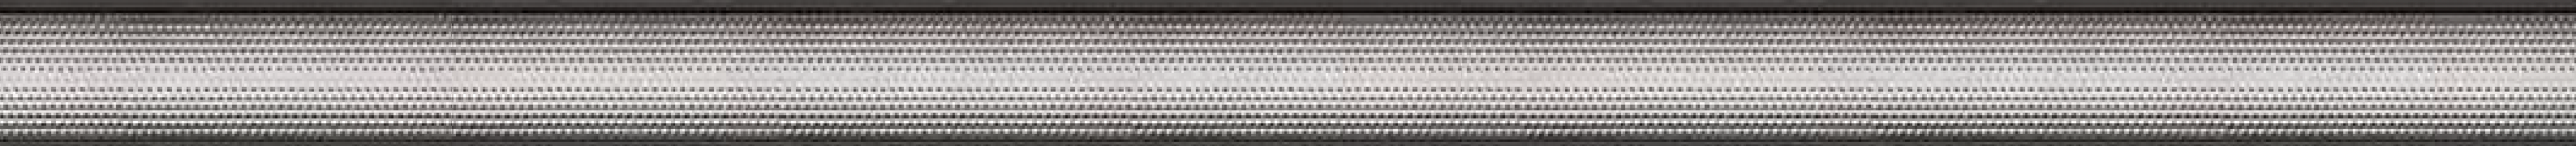

**Micro Prismatic**  
(UGR<19)  
[100°]





EAN : 69012136





EAN : 69011245  
EAN : 69011580



EAN : 69011238

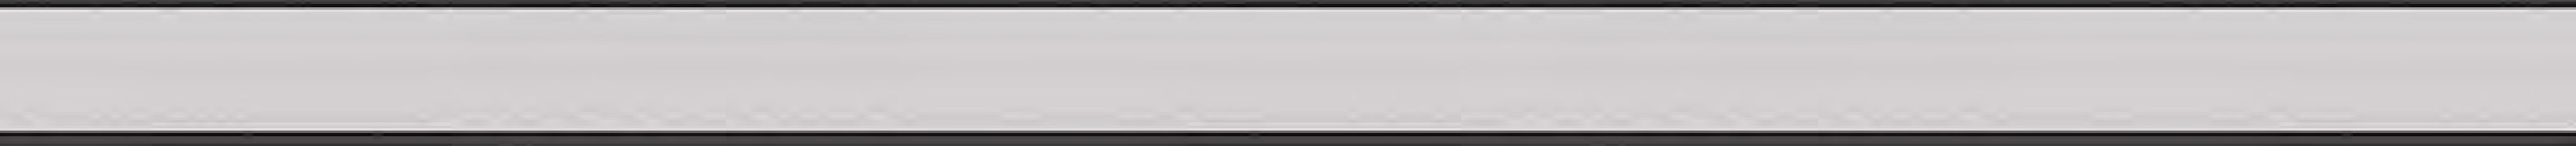


**Opal High**  
**Uniformity(100°)**

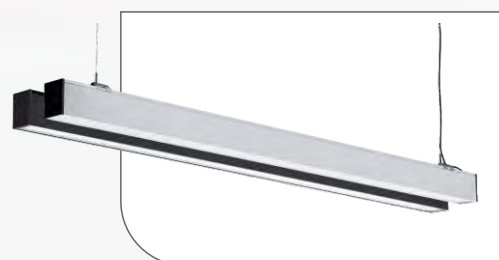

**Series**  
**Connection**



**Wire-through**  
**Connection**



\*\*\*All Linear light Standard  
Including 2m Suspension Kits




★LUCCA LED Linear Lights are an energy efficient, low maintenance alternative to traditional linear fluorescent in a variety of industrial, commercial, and light assembly applications.

★It is the optimal solution for conventional lighting systems and excellent for new installations due to its low installation cost.


- ★Saves 80% energy
- ★No Ultraviolet or Infrared Rays
- ★Fashion designs with various choices
- ★No Lead or Mercury content hence environment friendly.
- ★Provides Uniform Radiance & Enhances appeal of any environment. Some with UGR<19 option.

**5 YEARS**  
Warranty

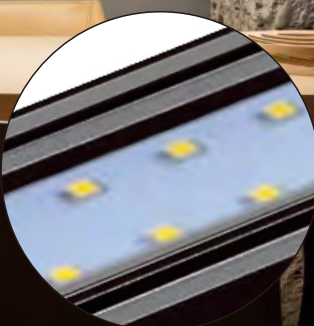


**Osram Chip**  
With high efficiency

**0-10V**  
Dimmable

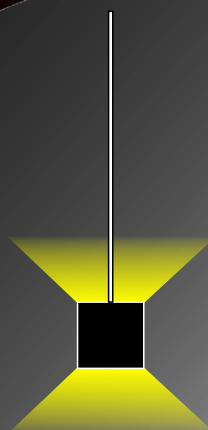

- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>85, IP40 protection class
- High Quality **Osram Chips, 0-10V Driver**
- AC Input: 220V-240V,50/60Hz
- No Flickering

**5 YEARS**  
Warranty

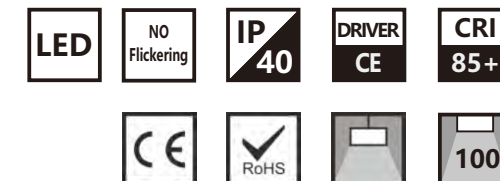

**EAN : 69012136**



LU-L3570A-UU(UP AND DOWM)




**UGR<19**  
Microprismatic Diffuser

**0-10V**  
Dimmable

| Rated Power           | Efficiency           | Input Voltage | Lumen          | CCT             |
|-----------------------|----------------------|---------------|----------------|-----------------|
| 40W (Up 13W Down 27W) | 90lm/W               | AC220-240V    | 3600lm         | 4000K Day White |
| Finished              | Beam Angle           | Box Qty       | Box Size       | G.Weight        |
| Black                 | UP 120°<br>Down 120° | 12 Pcs        | 1250*260*170mm | 28kg            |

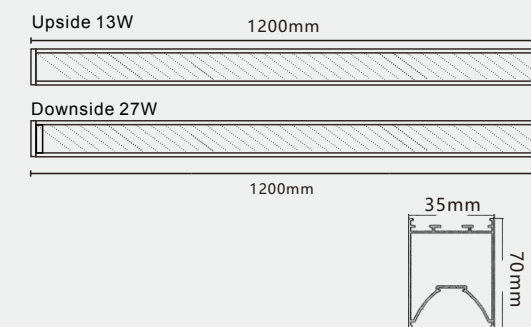

\*\*\*All Linear light Standard  
Including 2m Suspension Kits



*Light up your life*

www.luccalight.cz

**LINEAR LIGHT**



★LUCCA LED Linear Lights are an energy efficient, low maintenance alternative to traditional linear fluorescent in a variety of industrial, commercial, and light assembly applications.

**5** YEARS  
Warranty

★It is the optimal solution for conventional lighting systems and excellent for new installations due to its low installation cost.

- ★Saves 80% energy
- ★No Ultraviolet or Infrared Rays
- ★Fashion designs with various choices
- ★No Lead or Mercury content hence environment friendly.
- ★Provides Uniform Radiance & Enhances appeal of any environment Some with UGR<16 option.

**Osram Chip**  
With high efficiency



*Light up your life*


www.luccalight.cz

**LUCCA**  
*Light up your life*



- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>85, IP40 protection class
- High Quality **Osram Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering

**5** YEARS  
Warranty

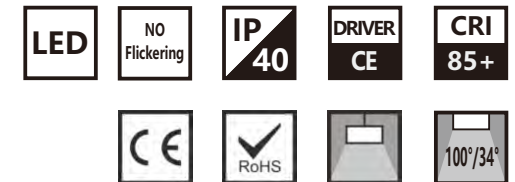


**EAN : 69011245**

LU-L3570B-DUR



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 40W         | 90lm/W     | AC220-240V    | 3600lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Black       | 100/34°    | 10Pcs         | 1250*260*170mm | 27kg            |

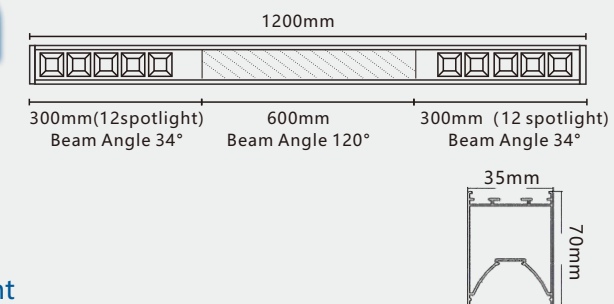


**EAN : 69011580**

LU-L3570B-DUR



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT              |
|-------------|------------|---------------|----------------|------------------|
| 40W         | 90lm/W     | AC220-240V    | 3600lm         | 3000K Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight         |
| Black       | 100/34°    | 10Pcs         | 1250*260*170mm | 27kg             |

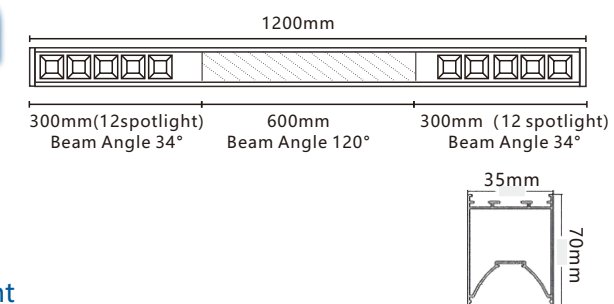

\*\*\*All Linear light Standard  
Including 2m Suspension Kits


**LINEAR LIGHT**






- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>85, IP40 protection class
- High Quality **Osram Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering

**5 YEARS**  
Warranty

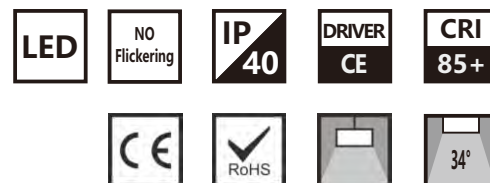

**EAN : 69012105**


LU-L3570C-DUR

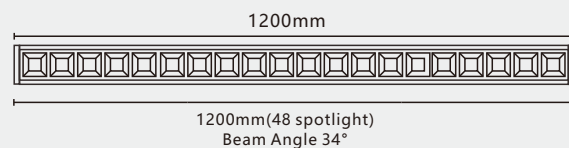

| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 40W         | 90lm/W     | AC220-240V    | 3600lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Black       | 34°        | 12Pcs         | 1350*260*170mm | 28kg            |

**EAN : 69012129**

LU-L3570C-DUR

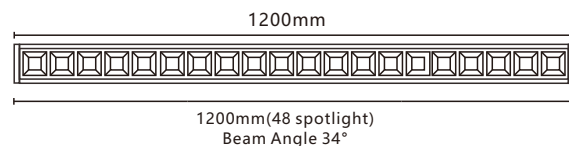


| Rated Power | Efficiency | Input Voltage | Lumen          | CCT              |
|-------------|------------|---------------|----------------|------------------|
| 40W         | 90lm/W     | AC220-240V    | 3600lm         | 3000K Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight         |
| Black       | 34°        | 12Pcs         | 1350*260*170mm | 28kg             |




- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>85, IP40 protection class
- High Quality **Osram Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering

**5 YEARS**  
Warranty

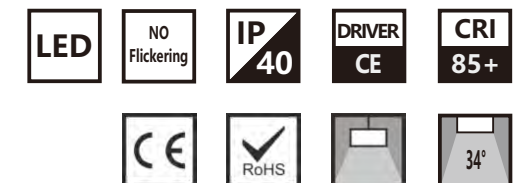


**EAN : 69012426**

LU-L3570C-DUR

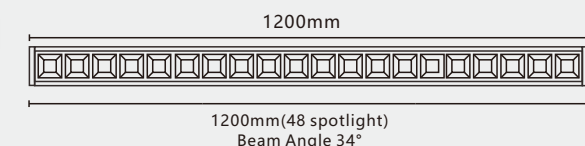


| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 40W         | 90lm/W     | AC220-240V    | 3600lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| White       | 34°        | 12Pcs         | 1350*260*170mm | 28kg            |





**EAN : 69012433**

LU-L3570C-DUR

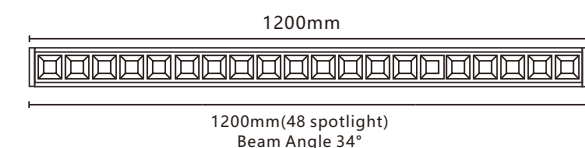

| Rated Power | Efficiency | Input Voltage | Lumen          | CCT              |
|-------------|------------|---------------|----------------|------------------|
| 40W         | 90lm/W     | AC220-240V    | 3600lm         | 3000K Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight         |
| White       | 34°        | 12Pcs         | 1350*260*170mm | 28kg             |



\*\*\*All Linear light Standard  
Including 2m Suspension Kits



*Light up your life*

www.luccalight.cz

**LINEAR LIGHT**


25





- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>85, IP40 protection class
- High Quality **Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering ,Series Linkable



**5**  
YEARS  
Warranty

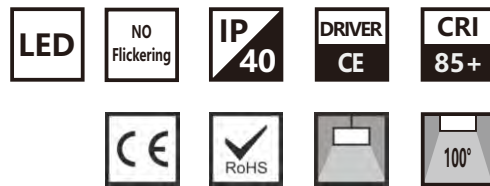

**EAN : 69011238**  
LU-5065

**UGR<19**  
Microprismatic Diffuser


|             |            |               |                |                 |
|-------------|------------|---------------|----------------|-----------------|
| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
| 40W         | 100lm/W    | AC220-240V    | 4000lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Black       | 100°       | 10Pcs         | 1230*300*180mm | 8kg             |

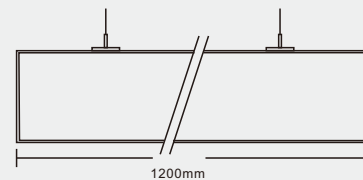

- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>85, IP40 protection class
- High Quality **Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering

**Series**  
LINKABLE



**5**  
YEARS  
Warranty

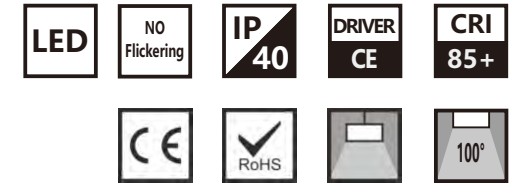

**EAN : 69010156**  
LU-L5270-30W





|             |            |               |                |                 |
|-------------|------------|---------------|----------------|-----------------|
| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
| 30W         | 100lm/W    | AC220-240V    | 3000lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Black       | 100°       | 12Pcs         | 1260*280*280mm | 24kg            |

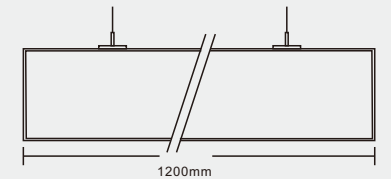

**EAN : 69010163**  
LU-L5270-30W





|             |            |               |                |                 |
|-------------|------------|---------------|----------------|-----------------|
| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
| 30W         | 100lm/W    | AC220-240V    | 3000lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| White       | 100°       | 12Pcs         | 1260*280*280mm | 24kg            |

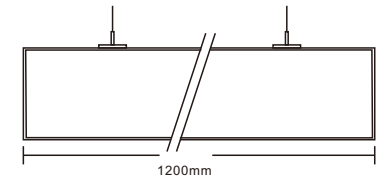

**EAN : 69011870**  
LU-L5270-30W



|             |            |               |                |                  |
|-------------|------------|---------------|----------------|------------------|
| Rated Power | Efficiency | Input Voltage | Lumen          | CCT              |
| 30W         | 100lm/W    | AC220-240V    | 3000lm         | 3000K Warm White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight         |
| White       | 100°       | 12Pcs         | 1260*280*280mm | 24kg             |

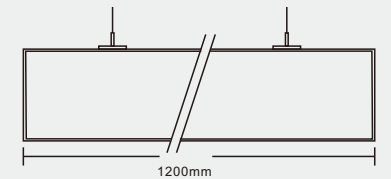






- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>85, IP40 protection class
- High Quality **Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering ,**Series Linkable**


**Series**  
**LINKABLE**

**5**  
**YEARS**  
**Warranty**

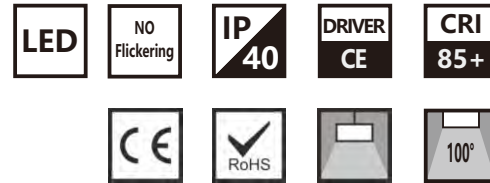

**EAN : 69010149**


LU-L5270-40W

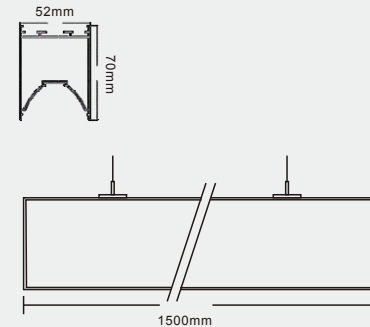


| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Black       | 100°       | 6Pcs          | 1560*170*200mm | 16kg            |

**EAN : 69010453**


LU-L5270-40W

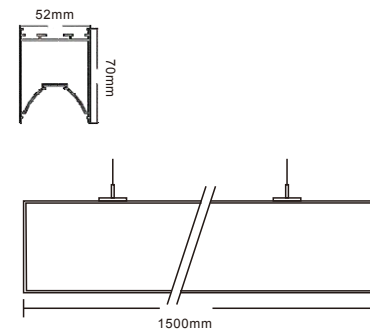

| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| White       | 100°       | 6Pcs          | 1560*170*200mm | 16kg            |




\*\*\*All Linear light Standard  
Including **2m** Suspension Kits

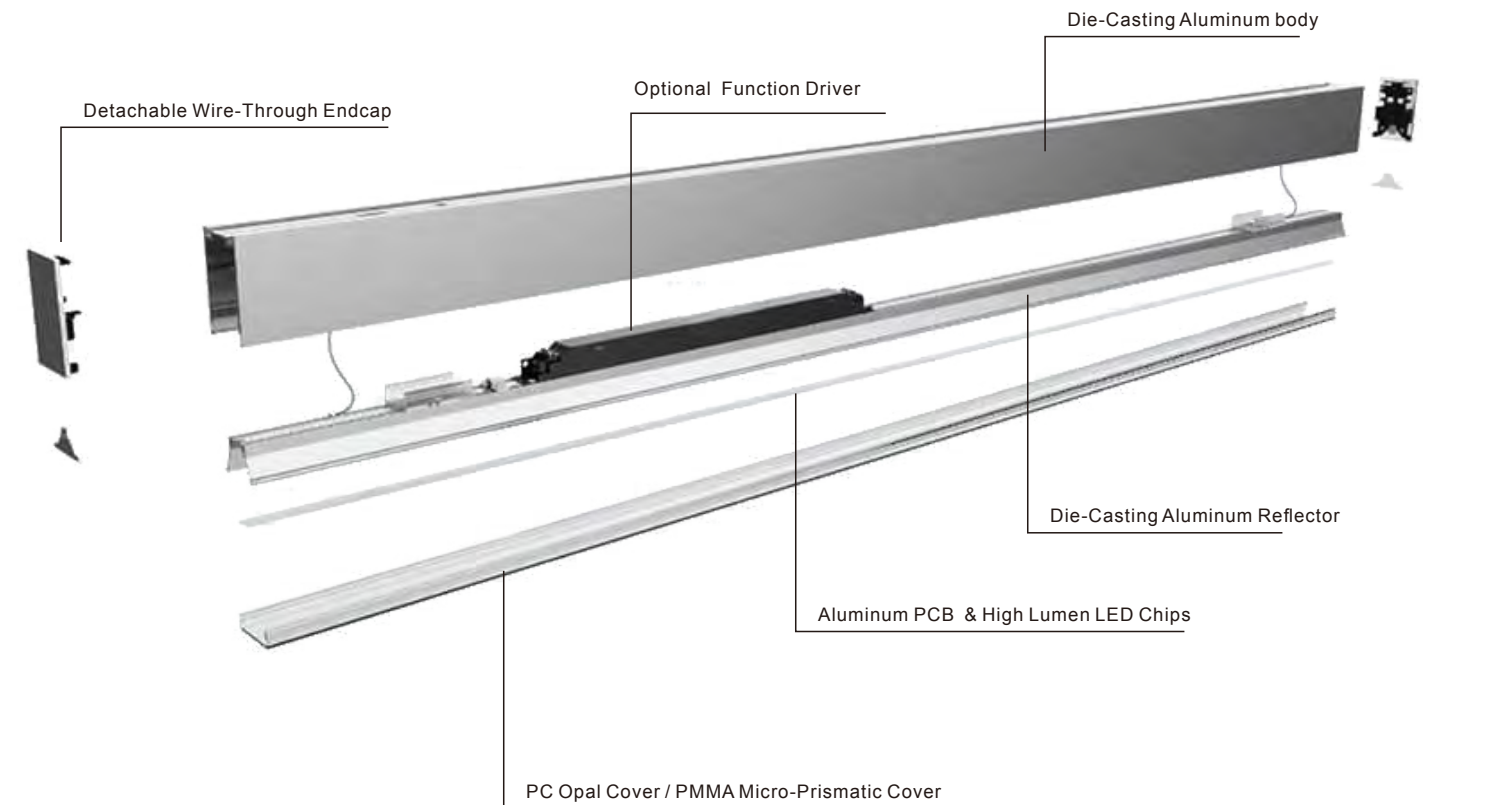





**CCT**  
Switchable  
**3000K**  
**4000K**  
**6000K**





| WW    | NW    | CW    |
|-------|-------|-------|
| 3000K | 4000K | 6000K |



**EAN : 69012525**  
LU-L5270-30W

**CCT**  
Switchable


| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 30W         | 100lm/W    | AC220-240V    | 3000lm         | 3000-4000-6000K |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| White       | 100°       | 12Pcs         | 1260*280*280mm | 24kg            |

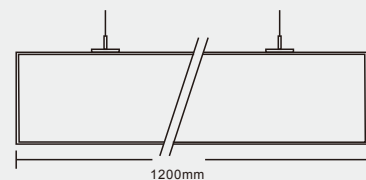

- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>85, IP40 protection class
- High Quality **Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering

**CCT Series**  
Switchable LINKABLE

**5**  
YEARS  
Warranty


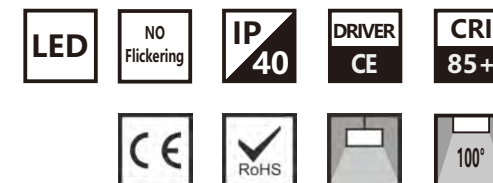


**EAN : 69012532**  
LU-L5270-30W



**CCT**  
Switchable

| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 30W         | 100lm/W    | AC220-240V    | 3000lm         | 3000-4000-6000K |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Black       | 100°       | 12Pcs         | 1260*280*280mm | 24kg            |

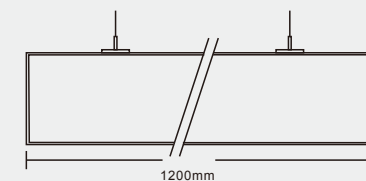



**EAN : 69012549**  
LU-L5270-40W



**CCT**  
Switchable

| Rated Power | Efficiency | Input Voltage | Lumen           | CCT             |
|-------------|------------|---------------|-----------------|-----------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm          | 3000-4000-6000K |
| Finished    | Beam Angle | Box Qty       | Box Size        | G.Weight        |
| White       | 100°       | 6Pcs          | 1560*1700*200mm | 16kg            |

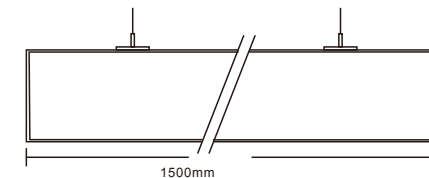



**EAN : 69012556**  
LU-L5270-40W



**CCT**  
Switchable

| Rated Power | Efficiency | Input Voltage | Lumen           | CCT             |
|-------------|------------|---------------|-----------------|-----------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm          | 3000-4000-6000K |
| Finished    | Beam Angle | Box Qty       | Box Size        | G.Weight        |
| Black       | 100°       | 6Pcs          | 1560*1700*200mm | 16kg            |

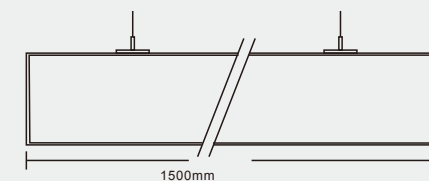

*Light up your life*

www.luccalight.cz

**LINEAR LIGHT**





# Wire-Through




Max 20 Luminaries in One row  
Easy Install and connection  
**NO DARK AREA**

**EAN : 69012853**

LU-L5270-40W




| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 40W         | 120lm/W    | AC220-240V    | 4800lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Black       | 100°       | 6Pcs          | 1560*170*200mm | 16kg            |

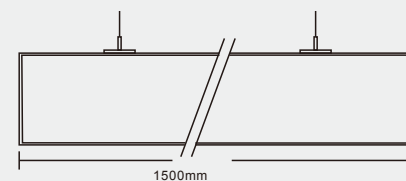

- ▶ SMD LED Type the lifetime is 50,000 hours
- ▶ 6063 aluminum extrusion with good heat-dissipation
- ▶ CRI:>85, IP40 protection class
- ▶ High Quality **Samsung Chips**
- ▶ AC Input: 220V-240V,50/60Hz
- ▶ No Flickering ,**Series Linkable**

**5 YEARS**  
Warranty


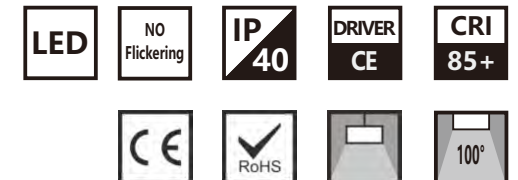


**EAN : 69012860**

LU-L5270-40W



| Rated Power | Efficiency | Input Voltage | Lumen           | CCT             |
|-------------|------------|---------------|-----------------|-----------------|
| 40W         | 120lm/W    | AC220-240V    | 4800lm          | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size        | G.Weight        |
| White       | 100°       | 6Pcs          | 1560*1700*200mm | 16kg            |

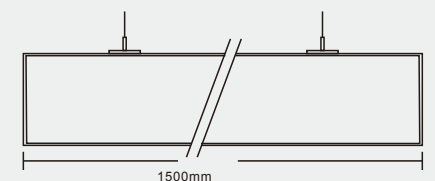



**EAN : 69012877**

LU-L5270-30W



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 30W         | 120lm/W    | AC220-240V    | 3600lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| Black       | 100°       | 12Pcs         | 1260*280*280mm | 24kg            |

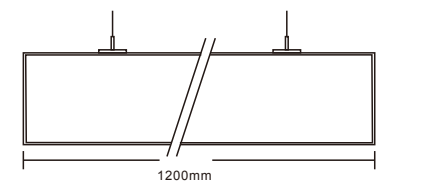



**EAN : 69012884**

LU-L5270-30W



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 30W         | 120lm/W    | AC220-240V    | 3600lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| White       | 100°       | 12Pcs         | 1260*280*280mm | 24kg            |

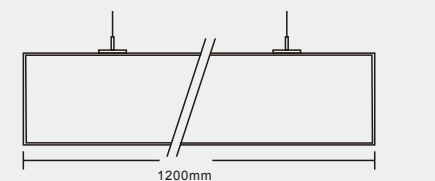

*Light up your life*

www.luccalight.cz

**LINEAR LIGHT**




**UpSide Lumen Output**  
Up to 115lm/W

**Double Anti-Glare**  
PMMA lens & Reflector  
UGR<13


**On/Off**  
#1 On/OFF Brightness Dimming  
#2 CCT Dimming

## Viewline free-standing luminaire


- Up-Down Two side lighting
- **UGR<13**, Anti-glare, Flicker free
- Efficiency up to **115lm/W**
- **0-10V** Dimming, **CCT** Dimming
- Easy installation



**5** YEARS  
Warranty

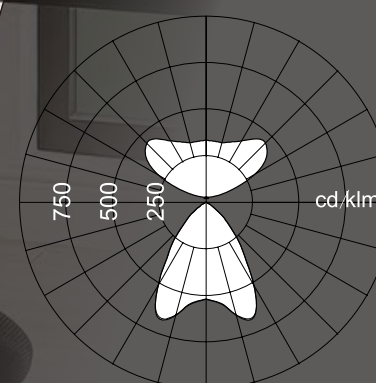




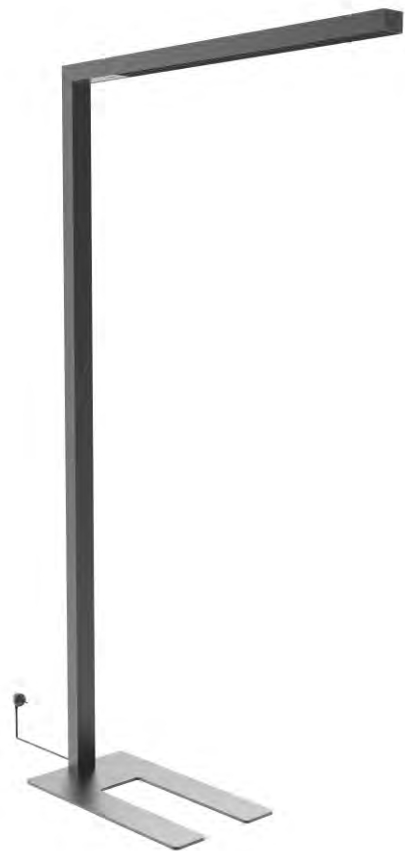

- ▶ SMD LED Type the lifetime is 50,000 hours
- ▶ Easy Installation
- ▶ CRI:>85, IP40 protection class
- ▶ Up-Down two Side lighting
- ▶ AC Input: 220V-240V,50/60Hz
- ▶ No Flickering ,CCT dimmable , 0-10V Dimmable

**5**  
YEARS  
Warranty

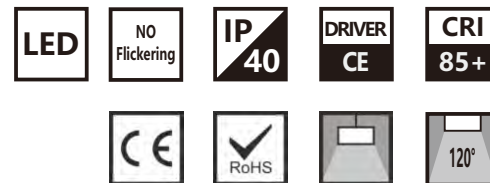


**EAN : 69012587**

LU-FS3-2000-65W




**UGR<13**  
Microprismatic Diffuser

| Rated Power | Efficiency | Input Voltage | Lumen          | CCT        |
|-------------|------------|---------------|----------------|------------|
| 65W         | 115lm/W    | AC220-240V    | 7500lm         | 3000-6000K |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight   |
| Black       | 120°       | 1Pcs          | 1200*440*140mm | 15kg       |

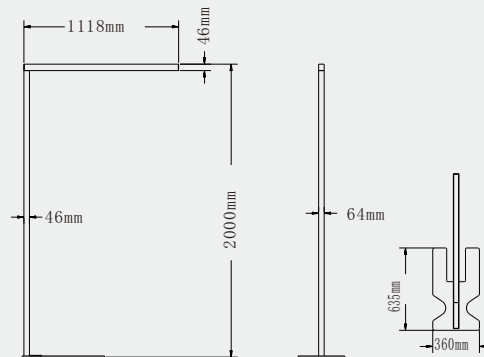

*Light up your life*

[www.luccalight.cz](http://www.luccalight.cz)

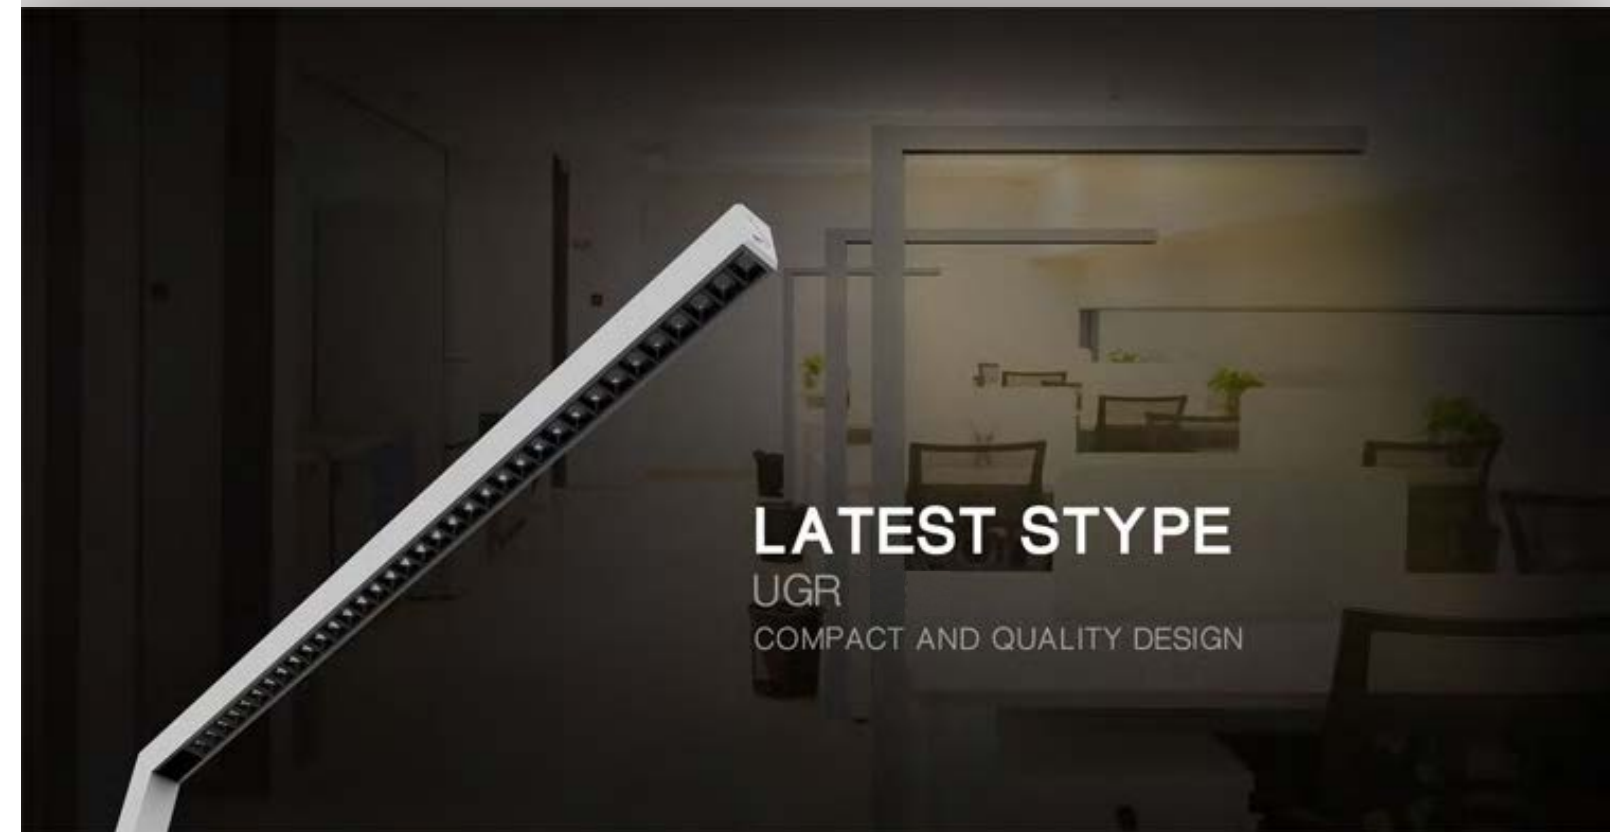


**LATEST STYPE**  
UGR  
COMPACT AND QUALITY DESIGN



**UpSide Lumen Output**  
Up to 115lm/W

**Double Anti-Glare**  
PMMA lens & Reflector  
UGR<13



**On/Off**  
#1 On/OFF Brightness Dimming  
#2 CCT Dimming



**DESK LIGHT**






## Perfect suspended lighting for

- ★supermarkets,
- ★warehouse,
- ★service centers,
- ★gymnasiums.

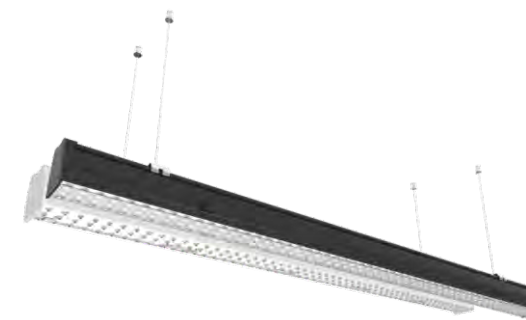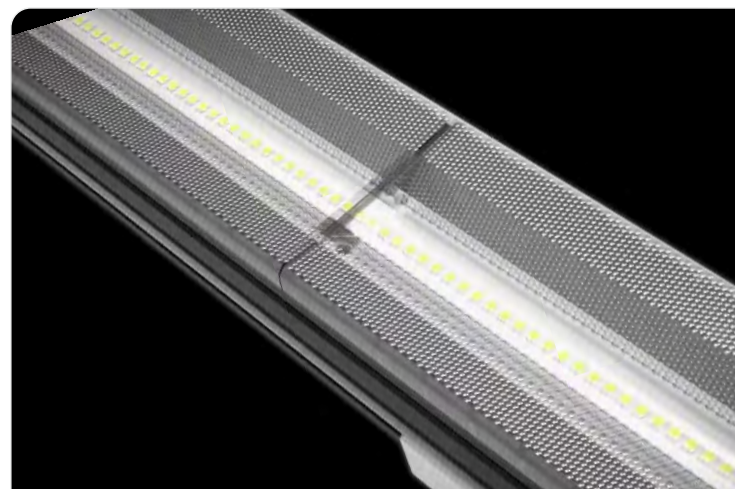

- ▶ SMD LED Type the lifetime is 50,000 hours
- ▶ 6063 aluminum extrusion with good heat-dissipation
- ▶ CRI:>85, IP40 protection class
- ▶ High Quality **Epistar Chips, Osram Driver**
- ▶ AC Input: 220V-240V,50/60Hz
- ▶ No Flickering

**5**  
YEARS  
Warranty

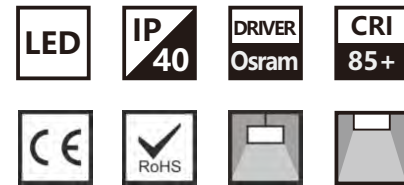

**EAN : 69011115**



LU-6870D-1565

**160lm/W**  
Ultra Lumen Efficiency

**EPISTAR** Chips

**OSRAM** Driver



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT                |
|-------------|------------|---------------|----------------|--------------------|
| 65W         | 160lm/W    | AC220-240V    | 10400lm        | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight           |
| White       | 90°        | 4Pcs          | 1510*200*200mm | 28kg               |

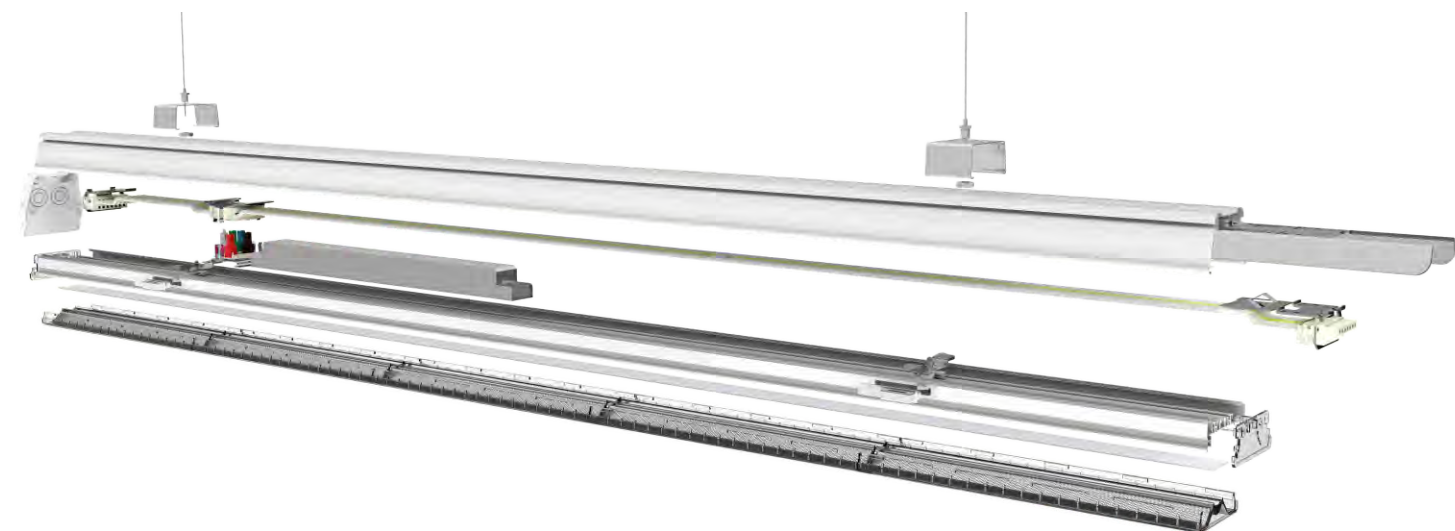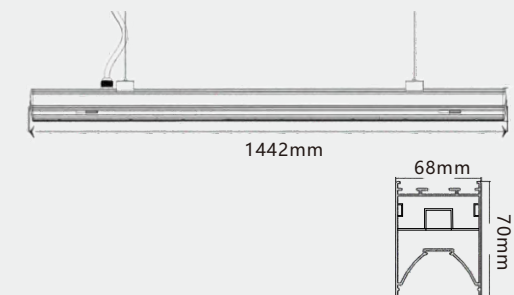





**Series 5**  
LINKABLE YEARS Warranty

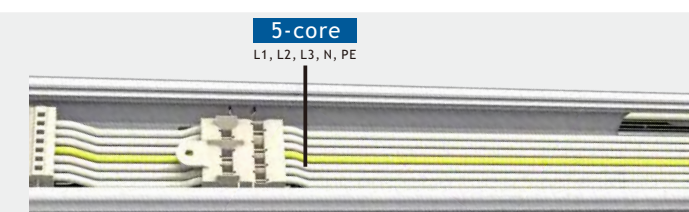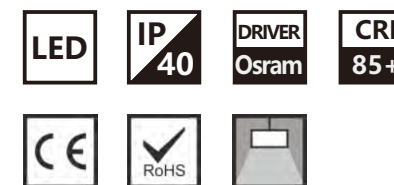

**EAN : 69011382**  
**WHITE**

LS6870D-15-5X

**Size**

1568\*68\*42mm

O Linear Trunk 1.5 Rail



**EAN : 69011399**  
**WHITE**

LU-6870D-1565-5X

Size:1420\*68\*70mm

Watt:60W

Eff.:160lm/W

Beam Angle:90°

CCT.:4000K

O Linear Trunk 1.5\*5 Wire



**EAN : 69010767**  
**WHITE**

LU-LS20


O Linear Trunk End Caps



**EAN : 69011429**  
**WHITE**

LU-LS32

O Linear Trunk Suspension String

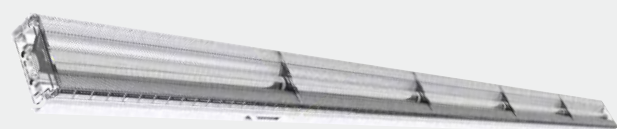

**EAN : 69011412**  
**WHITE**

LU-LT-LENS-DA25

**Beam Angle**

Double Symistic 25°

O Linear Trunk Lens DA(25°)



**EAN : 69010828**  
**WHITE**

LU-LS23

**Size**

1420\*68\*22mm

O Linear Trunk Blank Cover



**EAN : 69010880**  
**WHITE**

LU-LS17

**Wire**

5 Wire

O Linear Trunk Feed-in Connector






- ★Ultra Slim, Elegant & Contemporary Design
- ★Standard dimensions 30x120, 60x60, 60x120 available;
- ★Better light quality: less false colour plots;
- ★80% lower power consumption than conventional downlights;
- ★Higher Light Transmission Rate
- ★Exterior shell, cannot be easily damaged
- ★No infrared, does not attract flies
- ★No Lead or mercury content hence environment friendly
- ★Easy to install ( Different accessories optional: recessed clips, suspension kits, surface ceiling mounted frame, etc.)
- ★Different Driver optional (Emergency Driver, 0-10V Driver, DALI Driver, etc. )

**5**  
YEARS  
Warranty

# CCT Dimmable Sidelit Panel Light

For  
Smart Driver  
Wireless Driver

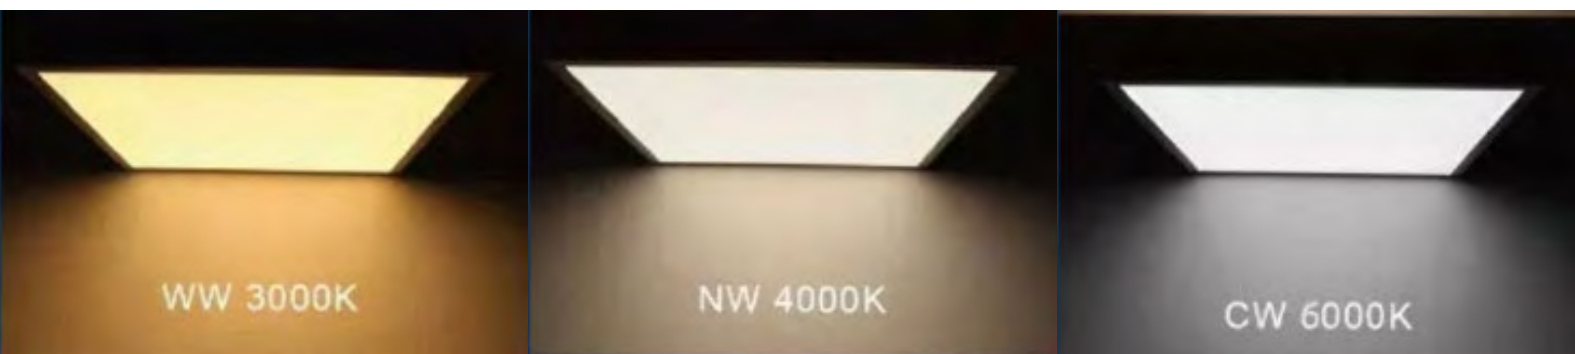


Light up your life

www.luccalight.cz



- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>80, IP40 protection class
- High Quality **Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering **UGR<19**

**5**  
YEARS  
Warranty

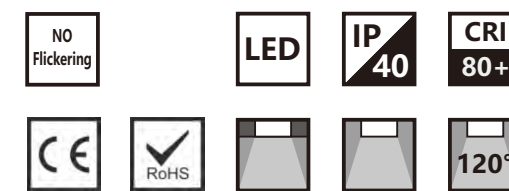

**EAN : 69012969**


LU-6060-40W



**CCT**  
Dimmable

**Without**  
LED Driver

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT        |
|-------------|------------|---------------|---------------|------------|
| 40W         | 120lm/W    | AC220-240V    | 4800lm        | 3000-6000K |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight   |
| White       | 120°       | 8 Pcs         | 670*670*210mm | 18kg       |

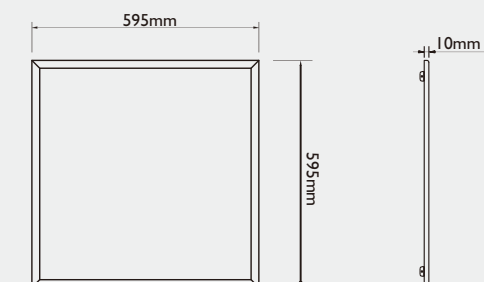

+LED Driver With Function

EAN No.

Pic

**ZigBee Function**



**EAN : 68015145**  
HA-ZBCH042BF-CCX1050/S



**WIFI/Bluetooth Function**



**EAN : 68015107**  
HA-WFCH042BF-CCX1050/S



**RF2.4G Function**



Accessory with Connector



**EAN : 68015152**  
HA-RFCH040BF-CC1000/S



**SIDELITE PANEL LIGHT**






- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>80, IP40 protection class
- High Quality **Philips Driver ,Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering **UGR<19**


 **UGR<19**  
Microprismatic Diffuser

**5** YEARS  
Warranty

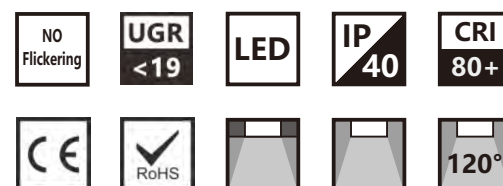

**EAN : 69010088**

LU-6060-40W(UGR19)

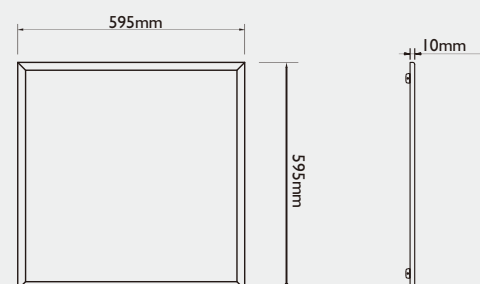



 **UGR<19**  
Microprismatic Diffuser

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT                |
|-------------|------------|---------------|---------------|--------------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm        | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight           |
| White       | 120°       | 8 Pcs         | 670*670*210mm | 18kg               |

**EAN : 69012754**

LU-6060-40WH(UGR19)

 **UGR<19**  
Microprismatic Diffuser  
**120lm/W**  
High-Lumen Efficiency

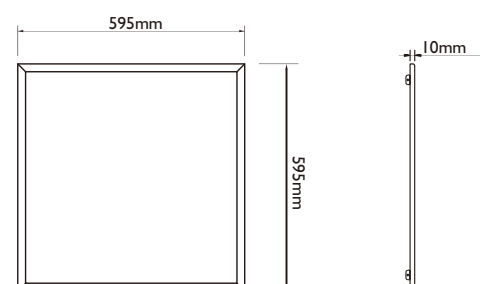


| Rated Power | Efficiency | Input Voltage | Lumen         | CCT                 |
|-------------|------------|---------------|---------------|---------------------|
| 40W         | 120lm/W    | AC220-240V    | 4800lm        | 6000K<br>Cool White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight            |
| White       | 120°       | 8 Pcs         | 670*670*210mm | 18kg                |

**EAN : 69011368**

LU-6060-40W(CRI95)

 **UGR<19**  
Microprismatic Diffuser

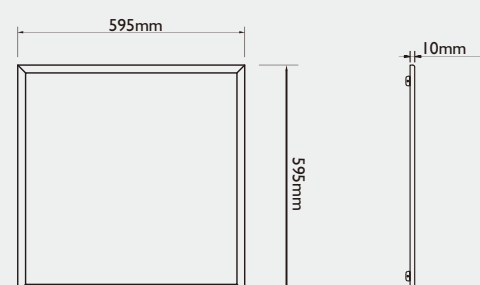


| Rated Power | Efficiency | Input Voltage | Lumen            | CCT                |
|-------------|------------|---------------|------------------|--------------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm<br>CRI>95 | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size         | G.Weight           |
| White       | 120°       | 8 Pcs         | 670*670*210mm    | 18kg               |





- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>80, IP40 protection class
- High Quality **Philips Driver ,Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering

**5** YEARS  
Warranty

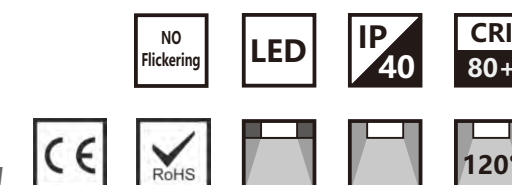

**EAN : 69010064**



LU-30120-40W

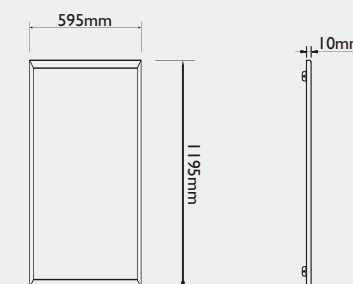

| Rated Power | Efficiency | Input Voltage | Lumen          | CCT                |
|-------------|------------|---------------|----------------|--------------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm         | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight           |
| White       | 120°       | 8 Pcs         | 1280*360*210mm | 18kg               |

**EAN : 69010484**

LU-60120-70W

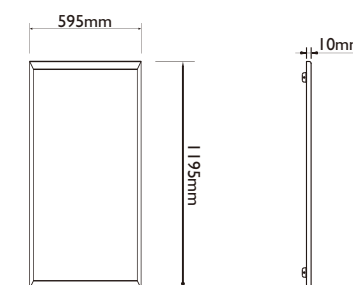

| Rated Power | Efficiency | Input Voltage | Lumen          | CCT                |
|-------------|------------|---------------|----------------|--------------------|
| 70W         | 100lm/W    | AC220-240V    | 7000lm         | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight           |
| White       | 120°       | 5 Pcs         | 1280*360*210mm | 18kg               |



*Light up your life*

www.luccalight.cz

**SIDELITE PANEL LIGHT**


35





- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>80, IP40 protection class
- High Quality **Philips Driver ,Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering

**5**  
YEARS  
Warranty

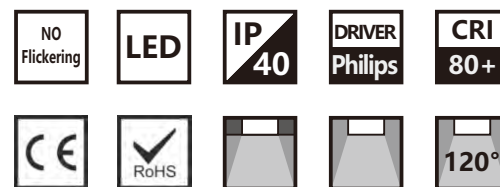


**EAN : 69010026**

LU-6060-40W




| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 8 Pcs         | 670*670*210mm | 18kg            |

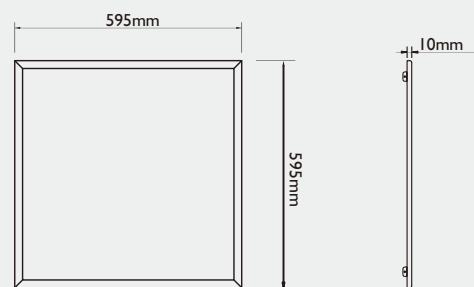



**EAN : 69010057**

LU-6060-40WH

**120lm/W**  
High- Lumen Efficiency




| Rated Power | Efficiency | Input Voltage | Lumen         | CCT              |
|-------------|------------|---------------|---------------|------------------|
| 40W         | 120lm/W    | AC220-240V    | 4800lm        | 6000K Cool White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight         |
| White       | 120°       | 8 Pcs         | 670*670*210mm | 18kg             |

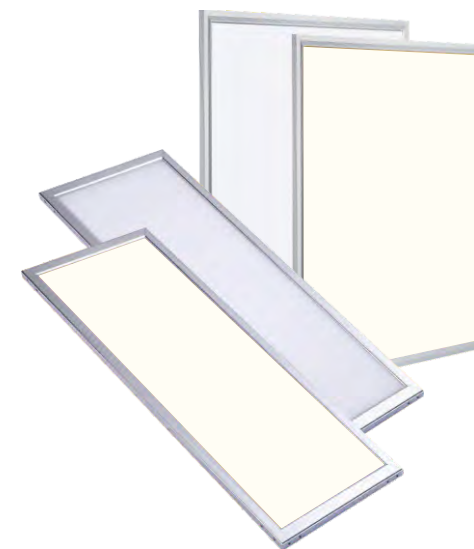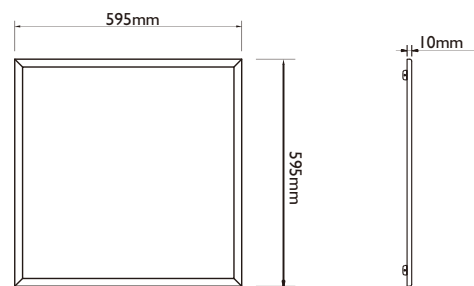

- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>80, IP40 protection class
- High Quality **Hahga Driver ,Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering

**120lm/W**  
High- Lumen Efficiency


**3**  
YEARS  
Warranty

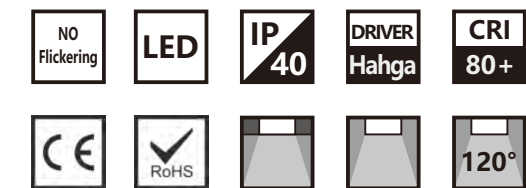


**EAN : 69010439**

LU-6060-36WHA

**120lm/W**  
High- Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 36W         | 120lm/W    | AC220-240V    | 4320lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 8 Pcs         | 670*670*210mm | 16kg            |

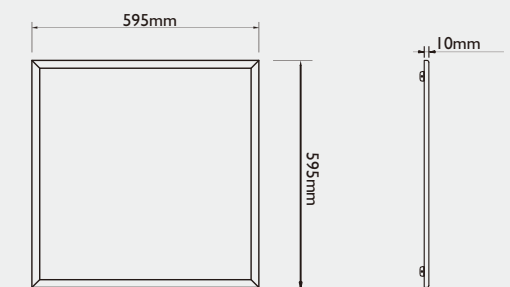


**EAN : 69010446**

LU-30120-36WHA

**120lm/W**  
High- Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 36W         | 120lm/W    | AC220-240V    | 4320lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| White       | 120°       | 8 Pcs         | 1280*370*210mm | 18kg            |

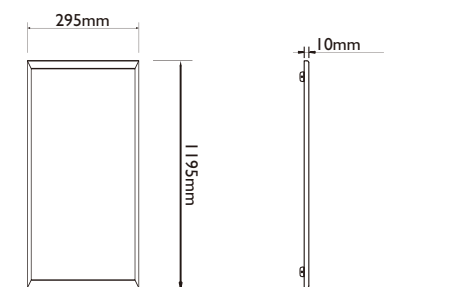

*Light up your life*

www.luccalight.cz

**SIDELITE PANEL LIGHT**

36






- ★Ultra Slim, Elegant & Contemporary Design
- ★Standard dimensions 30x120, 60x60, 60x120 available;
- ★Better light quality: less false colour plots;
- ★80% lower power consumption than conventional downlights;
- ★Higher Light Transmission Rate
- ★Exterior shell, cannot be easily damaged
- ★No infrared, does not attract flies
- ★No Lead or mercury content hence environment friendly
- ★Easy to install ( Different accessories optional: recessed clips, suspension kits, surface ceiling mounted frame, etc.)
- ★Different Driver optional (Emergency Driver, 0-10V Driver, DALI Driver, etc. )

**5**  
YEARS  
Warranty



- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>80, IP40 protection class
- High Quality **Hahga Driver** ,**Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering **UGR<19**

**5**  
YEARS  
Warranty

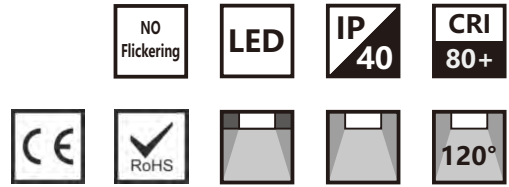

## CCT &Power Switchable Backlit Panel Light

Smart Switchable Driver  
CCT Switchable  
Power Switchable

**POWER**



**CCT**



| 1050mA | 900mA | 750mA |
|--------|-------|-------|
| 40W    | 36W   | 30W   |

| WW    | NW    | CW    |
|-------|-------|-------|
| 3000K | 4000K | 6000K |

**EAN : 69012945**

BKLU-6060-40W

**UGR<19**  
Microprismatic Diffuser

**CCT POWER**  
Switchable Switchable

Rated Power  
30/36/40W

Efficiency  
WW:130lm/W  
NW:140lm/W  
CW:140lm/W

Input Voltage  
AC220-240V

Lumen  
Max.6400lm

CCT  
CCT Switchable


Finished  
White

Beam Angle  
120°

Box Qty  
10 Pcs

Box Size  
660\*360\*660mm

G.Weight  
16.5kg

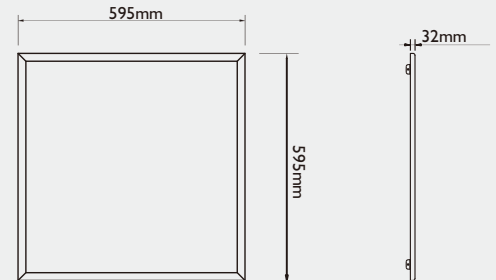

**EAN : 69012952**

BKLU-30120-40W

**UGR<19**  
Microprismatic Diffuser

**CCT POWER**  
Switchable Switchable

Rated Power  
30/36/40W

Efficiency  
WW:130lm/W  
NW:140lm/W  
CW:140lm/W

Input Voltage  
AC220-240V

Lumen  
Max.6400lm

CCT  
CCT Switchable


Finished  
White

Beam Angle  
120°

Box Qty  
10 Pcs

Box Size  
1260\*360\*360mm

G.Weight  
16.5kg

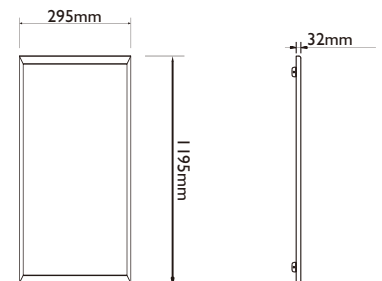

*Light up your life*

www.luccalight.cz

**BACKLITE PANEL LIGHT**



# Ultra-Slim Backlit Panel

- ++Never afraid of **Yellow**
- ++**Surface & Suspend** Installation
- ++**Economic** Price
- ++**No Flickering**


**25mm Slim**

25mm

**Slim Driver**  
Surface & Suspend  
Installation

**PMMA Lens**  
Never yellow for  
at least 20years

**\*URG<19**  
Microprismatic

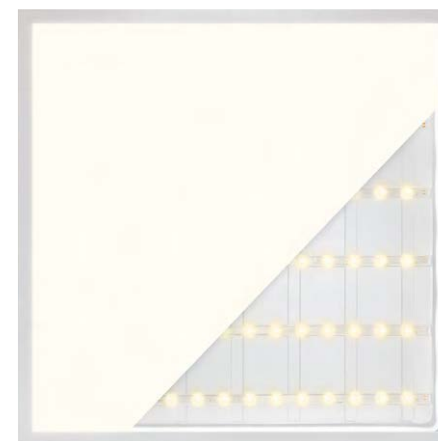

**Ultra Slim**  
**25mm**

**5 YEARS**  
Warranty




**EAN : 69012563**

BKLU-6060-36W(UGR)

**UGR<19**  
Microprismatic Diffuser  
**120lm/W**  
High-Lumen Efficiency



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 36W         | 120lm/W    | AC220-240V    | 4320lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 10 Pcs        | 670*250*670mm | 16.5kg          |


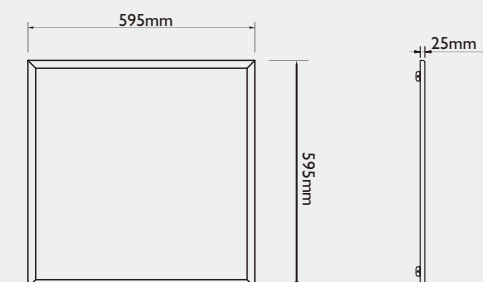


**EAN : 69012747**

BKLU-6060-40W



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 10 Pcs        | 670*250*670mm | 16.5kg          |

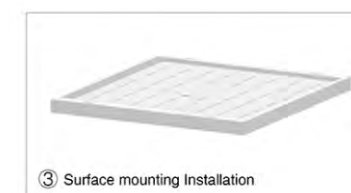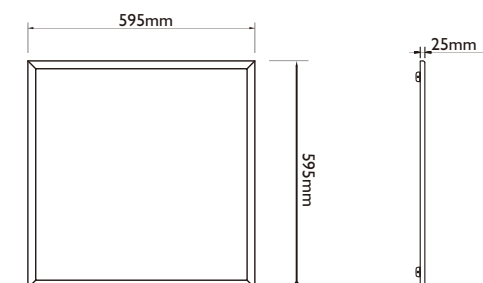





- SMD LED Type the lifetime is 50,000 hours
- PC body with ECO price
- CRI:>80, IP40 protection class
- High Quality Hahga Driver, **Samsung Chips**
- AC Input:220V-240V,50/60Hz
- No Flickering

**3** YEARS  
Warranty




**EAN : 69012891**

BKLU-6060-40W



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 40W         | 110lm/W    | AC220-240V    | 4400lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 10 Pcs        | 660*250*660mm | 16.8kg          |


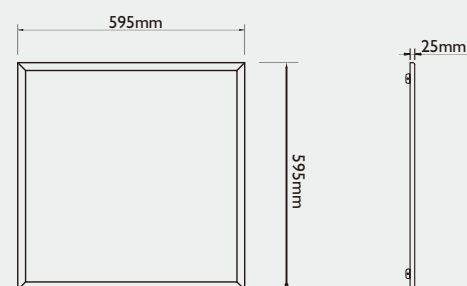


**EAN : 69012907**

BKLU-30120-40W



| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 40W         | 110lm/W    | AC220-240V    | 4400lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| White       | 120°       | 10 Pcs        | 1260*250*360mm | 16.8kg          |

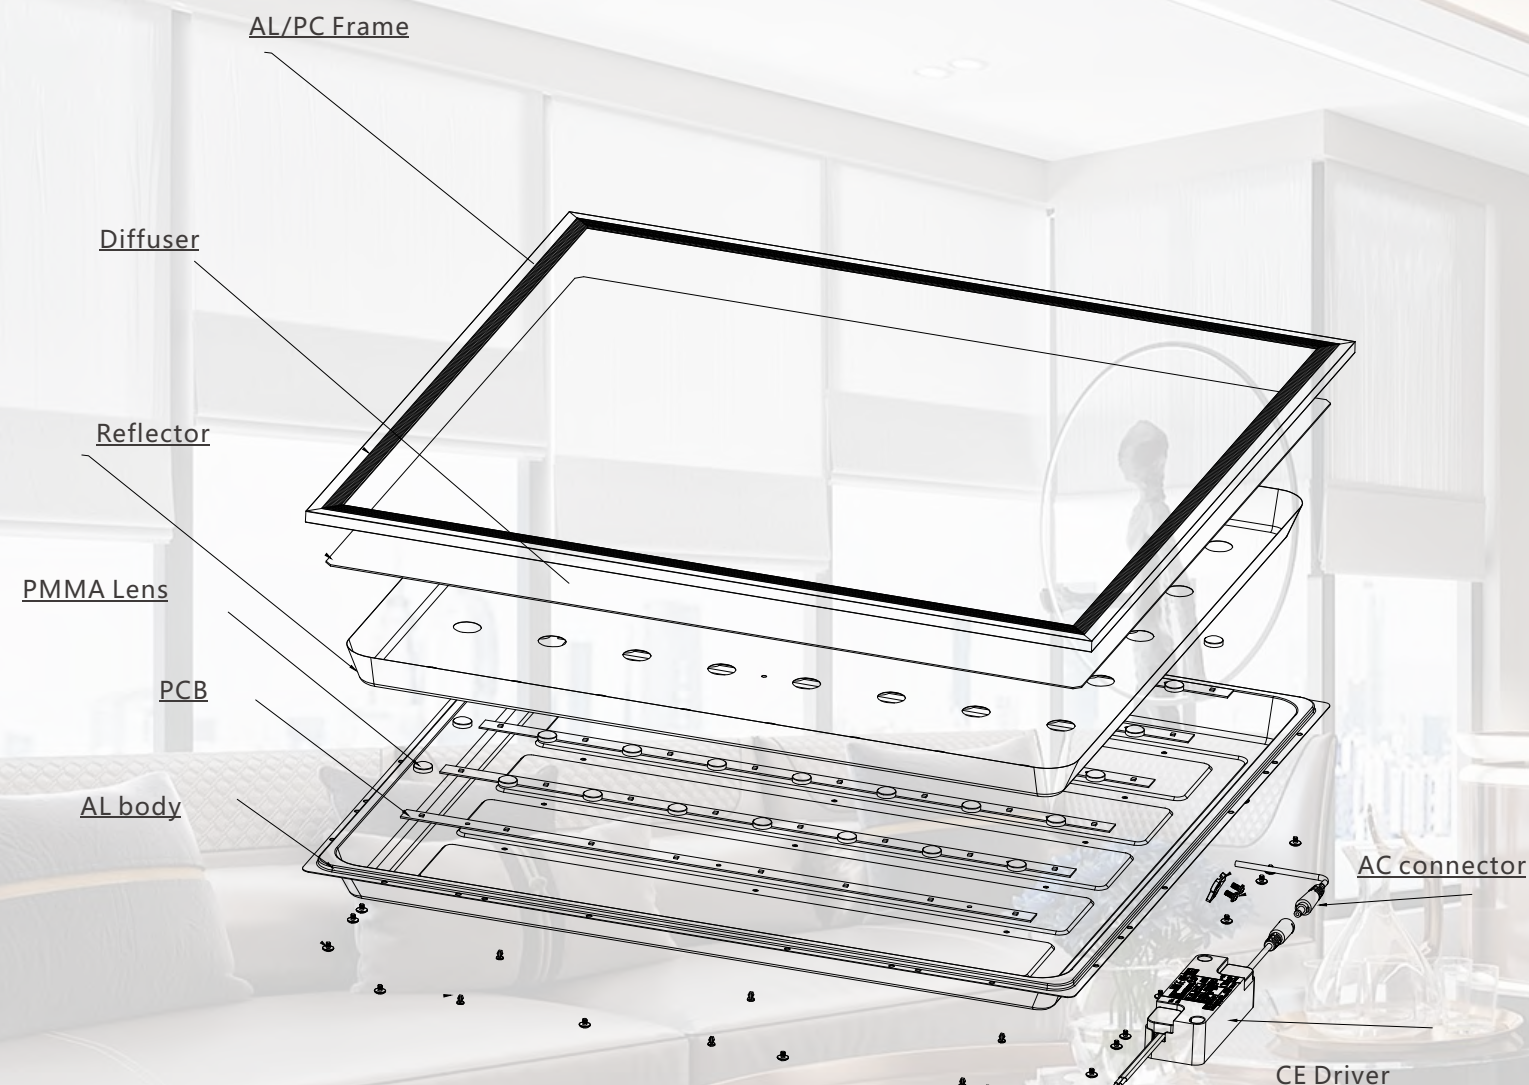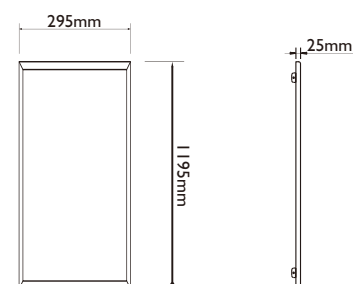




# High-Efficiency Backlit Panel

---Same Lumen Output With 70% Energy Cost---


**160lm/W**

**SAVE 37% of Energy**

25W 160lm/W  
Output 4000lm

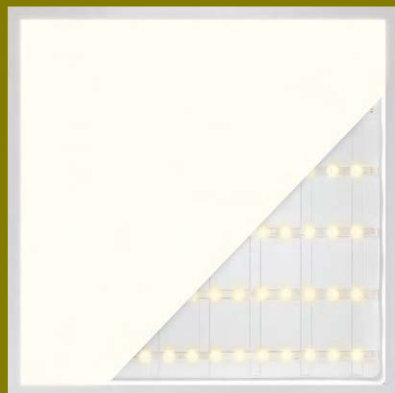

40W 100lm/W  
Output 4000lm

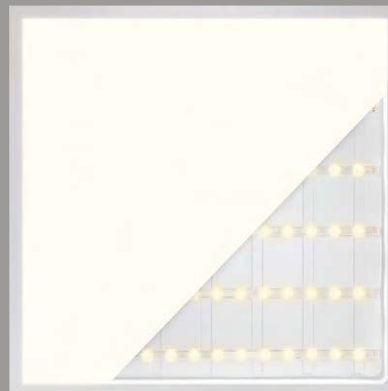





- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>80, IP40 protection class,
- High Quality Hahga Driver, **Samsung Chips**
- AC Input:220V-240V,50/60Hz
- No Flickering **UGR<19**

**UGR<19** **150lm/W**  
Microprismatic Diffuser High- Lumen Efficiency

**5 YEARS**  
Warranty




**EAN : 69012723**

BKLU-6060-25W(UGR)

**UGR<19**  
Microprismatic Diffuser  
**150lm/W**  
High- Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 25W         | 150lm/W    | AC220-240V    | 3750lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 10 Pcs        | 670*360*670mm | 16.5kg          |


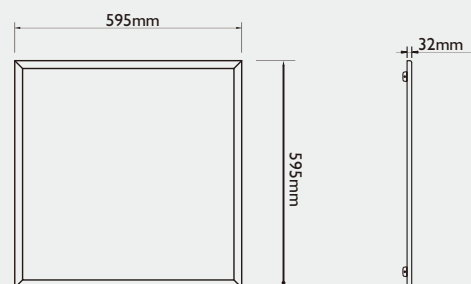


**EAN : 69012730**

BKLU-6060-30W(UGR)

**UGR<19**  
Microprismatic Diffuser  
**150lm/W**  
High- Lumen Efficiency


| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 30W         | 150lm/W    | AC220-240V    | 4500lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 10 Pcs        | 670*360*670mm | 16.5kg          |

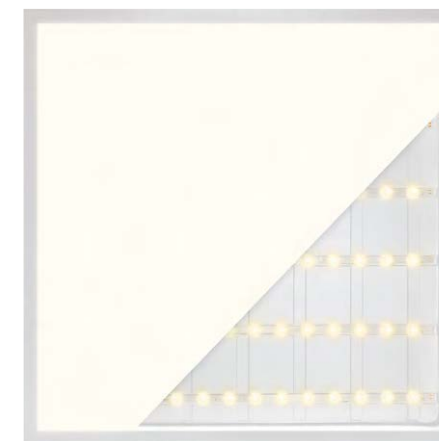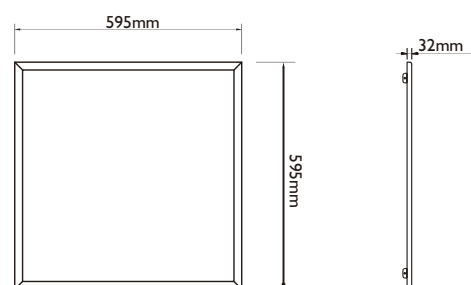

- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>80, IP40 protection class
- High Quality **Philips Driver ,Samsung Chips**
- AC Input: 220V-240V,50/60Hz
- No Flickering

**160lm/W**  
Super- Lumen Efficiency

**5 YEARS**  
Warranty

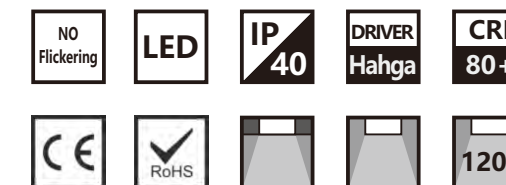


**EAN : 69012709**

BKLU-6060-25W

**160lm/W**  
Super- Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 25W         | 160lm/W    | AC220-240V    | 4000lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 10 Pcs        | 670*360*670mm | 16.5kg          |

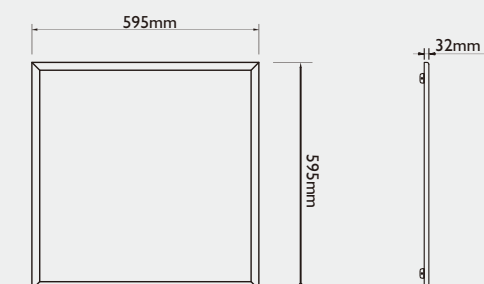


**EAN : 69012716**

BKLU-6060-30W

**160lm/W**  
Super- Lumen Efficiency

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 30W         | 160lm/W    | AC220-240V    | 4800lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 10 Pcs        | 670*360*670mm | 16.5kg          |

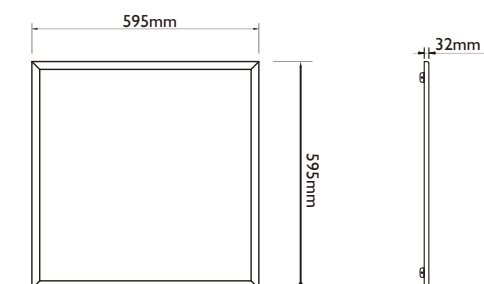


*Light up your life*

www.luccalight.cz

**BACKLITE PANEL LIGHT**

41



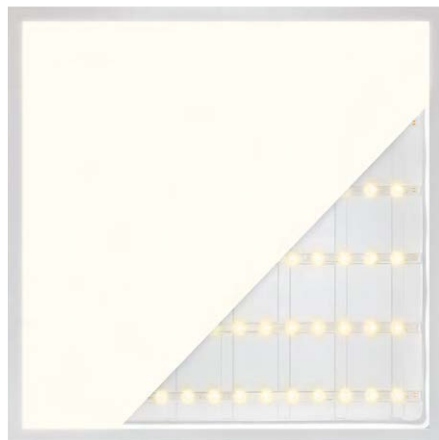

- SMD LED Type the lifetime is 50,000 hours
- 6063 aluminum extrusion with good heat-dissipation
- CRI:>80, IP40 protection class,
- High Quality Hahga Driver, **Samsung Chips**
- AC Input:220V-240V,50/60Hz
- No Flickering


**5**  
YEARS  
Warranty



**EAN : 69012242**

BKLU-6060-36W(UGR19)



**UGR<19**  
Microprismatic Diffuser

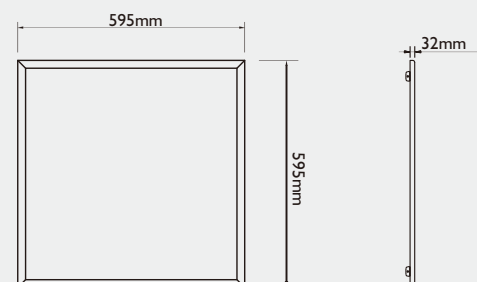

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 36W         | 120lm/W    | AC220-240V    | 4320lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 10 Pcs        | 670*360*670mm | 1 P16.5kgs      |

**EAN : 69012662**


BKLU-30120-40W

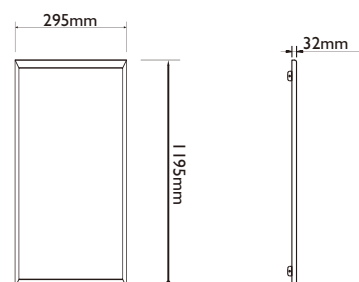

| Rated Power | Efficiency | Input Voltage | Lumen          | CCT             |
|-------------|------------|---------------|----------------|-----------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm         | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size       | G.Weight        |
| White       | 120°       | 10 Pcs        | 1260*360*360mm | 16.5kg          |




**5**  
YEARS  
Warranty

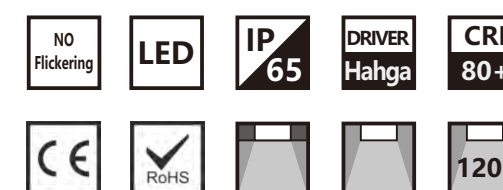

**EAN : 69012488**

BKLU-6060-40W(IP65)

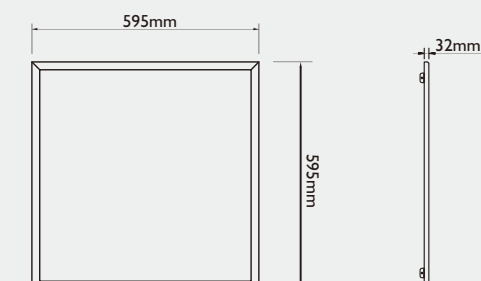

| Rated Power | Efficiency | Input Voltage | Lumen         | CCT             |
|-------------|------------|---------------|---------------|-----------------|
| 40W         | 100lm/W    | AC220-240V    | 4000lm        | 4000K Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight        |
| White       | 120°       | 10 Pcs        | 660*350*660mm | 18kg            |




*Light up your life*

www.luccalight.cz


**BACKLITE PANEL LIGHT**



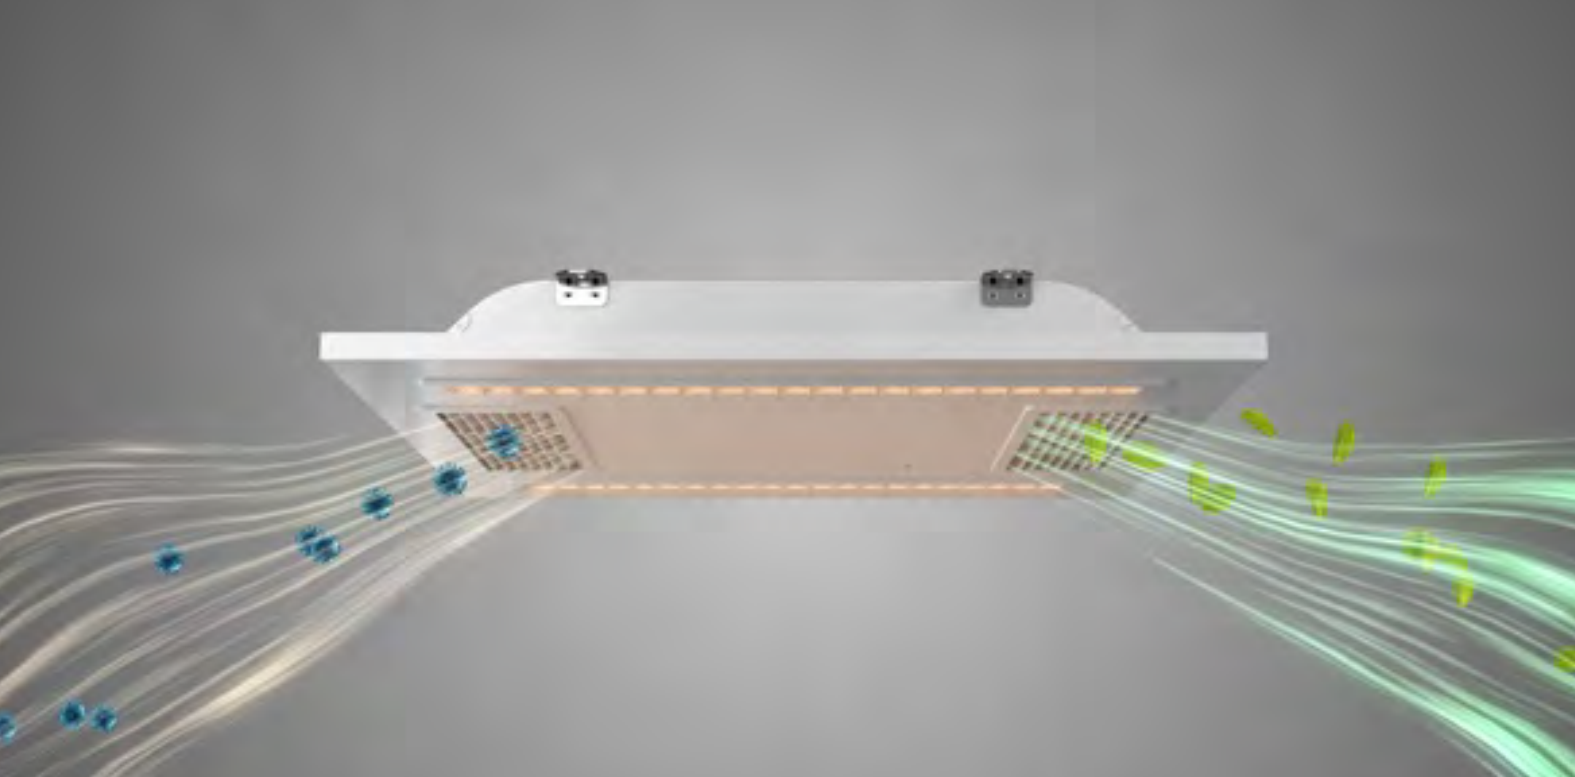

**5**  
YEARS  
Warranty

- ★LUCCA new **Air Circulation Germicidal Lamp** can deodorize and sanitize those hard to reach places on your equipment, and could operating while people in present:
- ★Safe air circulation germicidal design: Hiding UVC Lights behind the Panel, keep away from eyes and skin.
- ★UVC germicidal parts is using 11W Philips UVC light.
- ★Together working with air circulation function, making sure you get a great kill rate of bacteria, viruses and molds.

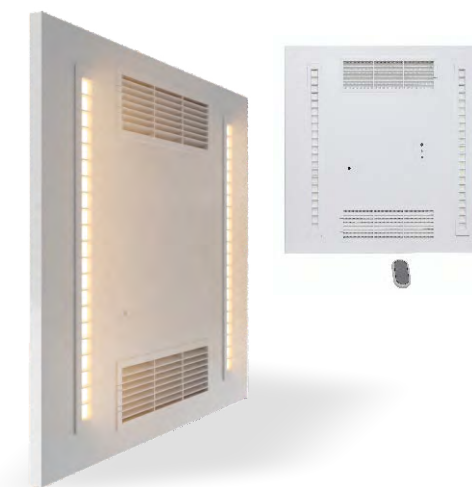


- ▶ SMD LED Type the lifetime is 50,000 hours
- ▶ CRI:>80, IP20 protection class
- ▶ High Quality **Philips Driver**
- ▶ **Philips UVC Tube**, Anti- bacteria, viruses and molds
- ▶ AC Input: 220V-240V,50/60Hz
- ▶ No Flickering






**EAN : 69012440**

LU-6060-36WACG1

**UGR<19**  
Microprismatic Diffuser



| Rated Power | Efficiency | Input Voltage | Lumen         | CCT                |
|-------------|------------|---------------|---------------|--------------------|
| 36W         | 120lm/W    | AC220-240V    | 4320lm        | 4000K<br>Day White |
| Finished    | Beam Angle | Box Qty       | Box Size      | G.Weight           |
| White       | 70°        | 1 Pcs         | 690*690*170mm | 5kg                |

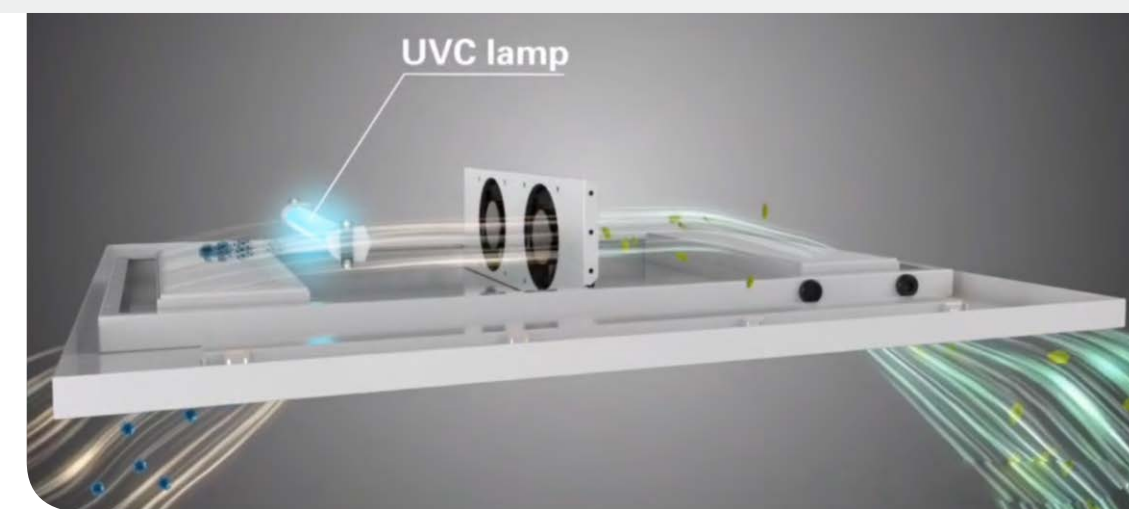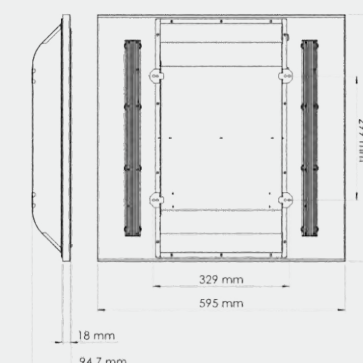

*Light up your life*

www.luccalight.cz

**AIR CIRCULATION GERMICIDAL LAMP**





# ACCESSORY

For LED Product  
5 Years Warranty  
CE Pass Quality



## DRIVER



## Panel ACCESSORY



## TRIPROOF ACCESSORY



## UFO ACCESSORY



## TRACK ACCESSORY



## OTHER







# Constant Current LED Driver

## Application:

Applicable to LED panel, LED Linear light  
LED Street light, LED Down Light, LED track Light  
LED Wall Pack, LED Triproof Light etc.

5  
YEARS  
Warranty



## LED CC Dimmable Driver

- ▶ 4 in 1 Dimming( DALI/0-10V/PWM/PUSH)
- ▶ Current Switchable, Suit for more product
- ▶ For LED Product
- ▶ 5 Years Warranty
- ▶ CE Pass Quality



**PUSH**  
Dimming

**PWM**  
Dimming

**0-10V**  
Dimmable

**5**  
YEARS  
Warranty

**AC&DC Input**  
Central emergency system  
Support




Smart Switchable

**EAN : 68013486**

HA-DL024BF-CCX700/S

Multi-Function CC Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current  | Efficiency | P.F. |
|------|---------------|----------------|-----------------|------------|------|
| 24W  | 220-240V AC   | 20-40VDC       | 350-700(+50/Lv) | 85%        | 0.90 |




**EAN : 68013790**

HA-DL040BF-CCX1050/S

Multi-Function CC Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current   | Efficiency | P.F. |
|------|---------------|----------------|------------------|------------|------|
| 40W  | 220-240V AC   | 20-40VDC       | 700-1050(+50/Lv) | 87%        | 0.90 |



## Multi-Function Dimmable Current Adjustable

8 Level  
Current Adjustable

0-10V Dimming

DALI Dimming

0.75-1.5 input line

|         |      |      |      |
|---------|------|------|------|
| Current | DIP1 | DIP2 | DIP3 |
| 700mA   | --   | --   | --   |
| 750mA   | --   | --   | ON   |
| 800mA   | --   | ON   | --   |
| 850mA   | --   | ON   | ON   |
| 900mA   | ON   | --   | --   |
| 950mA   | ON   | --   | ON   |
| 1000mA  | ON   | ON   | --   |
| 1050mA  | ON   | ON   | ON   |

| Item             | Parameter             |
|------------------|-----------------------|
| Output Type      | Constant Current      |
| Dimming Type     | DALI-2 PUSH 0-10V PWM |
| Dimming Range    | 1%-100%               |
| Output Features  | Isolation             |
| Limited voltage  | Max.264V AC           |
| T.H.D            | <10%                  |
| Power Factor     | >0.9                  |
| Current Ripple   | 5%                    |
| Power-on Time    | <0.5s                 |
| Protection class | Class II SELV         |
| Surge            | L-N:1.5KV             |
| Ta               | -20~+50°C             |
| Tc               | 85°C                  |
| IP rating        | IP20                  |
| Life time        | 50000 hours           |
| Warranty         | 5 years               |



Light up your life

www.luccalight.cz

DALI-2 • CC • DRIVER • ACCESSORY





## LED CC Dimmable Driver

- ▶ 4 in 1 Dimming( DALI/0-10V/PWM/PUSH)
- ▶ Current Switchable, Suit for more product
- ▶ For LED Product
- ▶ 5 Years Warranty
- ▶ CE Pass Quality




EAN : 68014018

HA-DLL040BF-CCX1150/T


### Multi-Function CC Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current     | Efficiency | P.F. |
|------|---------------|----------------|--------------------|------------|------|
| 40W  | 220-240V AC   | 20-40VDC       | 700/800/950/1050mA | 85%        | 0.90 |

## Multi-Function Dimmable Current Adjustable

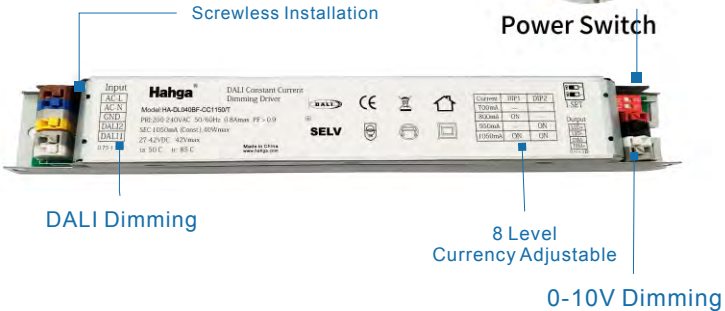

| Current | DIP1 | DIP2 |
|---------|------|------|
| 700mA   | -    | -    |
| 800mA   | ON   | -    |
| 950mA   | -    | ON   |
| 1050mA  | ON   | ON   |

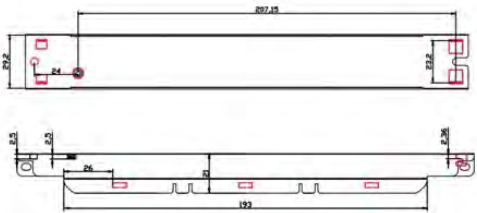


| Item             | Parameter               |
|------------------|-------------------------|
| Output Type      | Constant Current        |
| Dimming Type     | DALI-2 PUSH 0-10V PWM   |
| Dimming Range    | 1%-100%                 |
| Output Features  | Isolation               |
| Limited voltage  | Max.264V AC             |
| T.H.D            | <10%                    |
| Power Factor     | >0.9                    |
| Current Ripple   | 3%                      |
| Power-on Time    | <0.5s                   |
| Protection class | Class I                 |
| Surge            | L-N:1.5KV L/N-GND:1.5KV |
| Ta               | -20~+50°C               |
| Tc               | 85°C                    |
| IP rating        | IP20                    |
| Life time        | 50000 hours             |
| Warranty         | 5 years                 |

EAN : 68017255

HA-IKSX036BF-CCX950

### IP20 Constant Current 1-10V Dimming Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 36W  | 220-240V AC   | 27-38VDC       | 55-950mA       | 86%        | 0.95 |

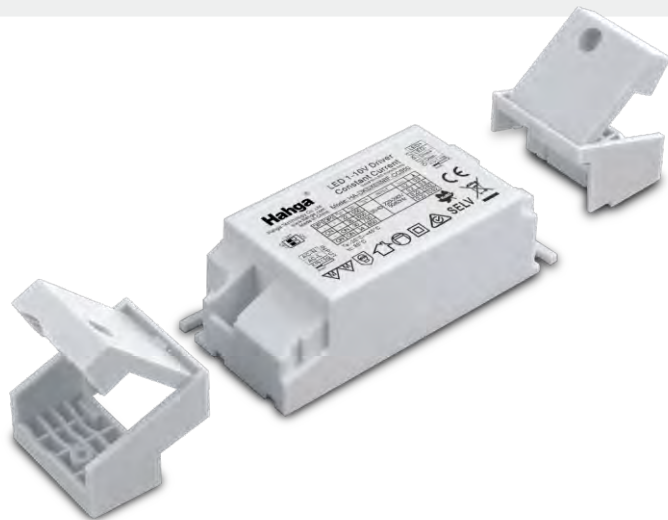

| DIP1 | DIP2 | P <sub>max</sub> | I <sub>rated</sub> | U <sub>output</sub> | INPUT               | I <sub>in(A)</sub> | λ    |
|------|------|------------------|--------------------|---------------------|---------------------|--------------------|------|
| -    | -    | 24               | 650                | 27-38               | 220-240V<br>50/60Hz | 0.22               | 0.9  |
| ON   | -    | 28               | 750                |                     |                     | 0.22               | 0.9  |
| -    | ON   | 32               | 850                |                     |                     | 0.28               | 0.92 |
| ON   | ON   | 36               | 950                |                     |                     | 0.28               | 0.92 |

Build-in:98\*44\*26mm  
Indep.:138\*44\*26mm

| Item             | Parameter        |
|------------------|------------------|
| Output Type      | Constant Current |
| Dimming Type     | 1-10V            |
| Dimming Range    | 10%-100%         |
| Output Features  | Isolation        |
| Limited voltage  | Max.264V AC      |
| T.H.D            | <15%             |
| Power Factor     | >0.9             |
| Current Ripple   | 5%               |
| Power-on Time    | <0.5s            |
| Protection class | Class II SELV    |
| Surge            | L-N:2KV          |
| Ta               | -20°C~+50°C      |
| Tc               | 85°C             |
| IP rating        | IP20             |
| Life time        | 50000 hours      |
| Warranty         | 5 years          |

EAN : 68018719

HA-DL100AF-CC2100/TP

### IP67 CC Dali Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 100W | 90-265V AC    | 35-50Vdc       | 2100mA         | 90%        | 0.95 |



| Item             | Parameter           |
|------------------|---------------------|
| Output Type      | Constant Current    |
| Dimming Type     | DALI-2 PUSH         |
| Dimming Range    | 1%-100%             |
| Output Features  | Isolation           |
| Limited voltage  | Max.305V AC         |
| T.H.D            | <10%                |
| Power Factor     | >0.95               |
| Voltage Ripple   | 3%                  |
| Power-on Time    | <0.5s               |
| Protection class | Class I             |
| Surge            | L-N:4KV L/N-GND:6KV |
| Ta               | -25°C~+50°C         |
| Tc               | +85°C               |
| IP rating        | IP67                |
| Life time        | 50000 hours         |
| Warranty         | 5 years             |



Light up your life

www.luccalight.cz

DIMMING • CC • DRIVER • ACCESSORY






## LED WIFI&BLUETOOTH Dimming Driver

- WIFI& Bluetooth 3.0 Dimmable
- For LED Product
- 5 Years Warranty
- CE Pass Quality



| Model No. | L         | W        | H        |
|-----------|-----------|----------|----------|
|           | 138 ± 1mm | 45 ± 1mm | 30 ± 1mm |

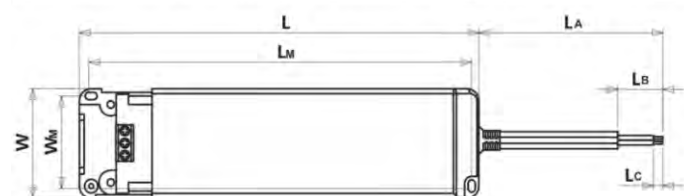

Power Switchable

| Item             | Parameter             |
|------------------|-----------------------|
| Output Type      | Constant Current      |
| Dimming Type     | WIFI Bluetooth3.0 CCT |
| Dimming Range    | 1%-100%               |
| Output Features  | Isolation             |
| Limited voltage  | Max.264V AC           |
| T.H.D            | <10%                  |
| Power Factor     | >0.9                  |
| Current Ripple   | 3%                    |
| Power-on Time    | <0.5s                 |
| Protection class | Class II SELV         |
| Surge            | L-N:1.5KV             |
| Ta               | -20°C~+50°C           |
| Tc               | 85°C                  |
| IP rating        | IP20                  |
| Life time        | 50000 hours           |
| Warranty         | 5 years               |

HA-WFCH042BF-CCX1050/S

| Switching selection sheet |        |    |    |
|---------------------------|--------|----|----|
| Pratrd                    | Iratrd | 1  | 2  |
| 42W                       | 1050mA | —  | —  |
| 36W                       | 900mA  | ON | —  |
| 32W                       | 800mA  | —  | ON |
| 28W                       | 700mA  | ON | ON |

HA-WFCH030BF-CCX750/S

| Switching selection sheet |        |    |    |
|---------------------------|--------|----|----|
| Pratrd                    | Iratrd | 1  | 2  |
| 30W                       | 750mA  | —  | —  |
| 28W                       | 700mA  | ON | —  |
| 24W                       | 600mA  | —  | ON |
| 20W                       | 500mA  | ON | ON |

HA-WFCH014BF-CCX350/S

| Switching selection sheet |        |    |    |
|---------------------------|--------|----|----|
| Pratrd                    | Iratrd | 1  | 2  |
| 14W                       | 350mA  | —  | —  |
| 12W                       | 300mA  | ON | —  |
| 10W                       | 250mA  | —  | ON |
| 8W                        | 210mA  | ON | ON |

**EAN : 68015107**

HA-WFCH042BF-CCX1050/S

IP20 Wifi&Bluetooth Wireless Dimming Driver

| Watt         | Input Voltage | Output Voltage | Output Current                  | Efficiency | P.F. |
|--------------|---------------|----------------|---------------------------------|------------|------|
| 42/36/32/28W | 220-240V AC   | 30-40VDC       | 1050/900/800/700mA<br>Adaptable | 86%        | 0.95 |

**EAN : 68015091**

HA-WFCH030BF-CCX750/S

IP20 Wifi&Bluetooth Wireless Dimming Driver


| Watt         | Input Voltage | Output Voltage | Output Current                 | Efficiency | P.F. |
|--------------|---------------|----------------|--------------------------------|------------|------|
| 30/28/24/20W | 220-240V AC   | 30-40VDC       | 750/700/600/500mA<br>Adaptable | 86%        | 0.95 |

**EAN : 68015084**

HA-WFCH014BF-CCX350/S

IP20 Wifi&Bluetooth Wireless Dimming Driver

| Watt        | Input Voltage | Output Voltage | Output Current                 | Efficiency | P.F. |
|-------------|---------------|----------------|--------------------------------|------------|------|
| 14/12/10/8W | 220-240V AC   | 30-40VDC       | 350/300/250/210mA<br>Adaptable | 85%        | 0.95 |

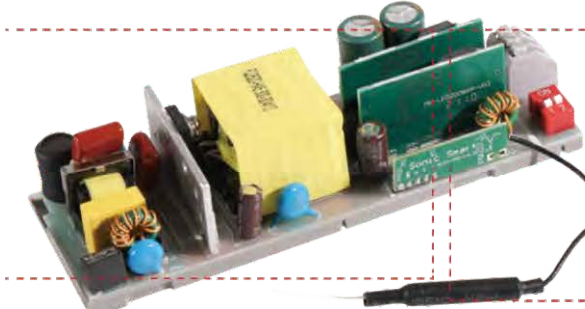

Macbee



Light up your life

www.luccalight.cz

**WIRELESS • CC • DRIVER • ACCESSORY**






**EAN : 68015152**

HA-RFCH040BF-CC1000/S

### IP20 RF2.4G Wireless Dimming Driver



| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 40W  | 220-240V AC   | 25-40VDC       | 1000mA         | 86%        | 0.95 |

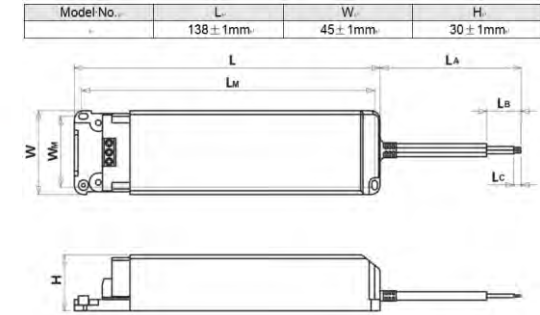

| Item             | Parameter           |
|------------------|---------------------|
| Output Type      | Constant Current    |
| Dimming Type     | RF2.4G CCT          |
| Dimming Range    | 1%-100% CCT 0%-100% |
| Output Features  | Isolation           |
| Limited voltage  | Max.264V AC         |
| T.H.D            | <10%                |
| Power Factor     | >0.9                |
| Current Ripple   | 3%                  |
| Power-on Time    | <0.5s               |
| Protection class | Class II SELV       |
| Surge            | L-N:1.5KV           |
| Ta               | -20°C~+50°C         |
| Tc               | 85°C                |
| IP rating        | IP20                |
| Life time        | 50000 hours         |
| Warranty         | 5 years             |


**EAN : 68015145**

HA-ZBCH042BF-CCX1050/S

### IP20 Zigbee Dimming Driver



| Watt         | Input Voltage | Output Voltage | Output Current                  | Efficiency | P.F. |
|--------------|---------------|----------------|---------------------------------|------------|------|
| 42/36/32/28W | 220-240V AC   | 30-40VDC       | 1050/900/800/700ma<br>Adaptable | 86%        | 0.95 |



Power Switchable

| Switching selection sheet |        |    |    |
|---------------------------|--------|----|----|
| Pratrd                    | Iratrd | 1  | 2  |
| 42W                       | 1050mA | —  | —  |
| 36W                       | 900mA  | ON | —  |
| 32W                       | 800mA  | —  | ON |
| 28W                       | 700mA  | ON | ON |

| Item             | Parameter           |
|------------------|---------------------|
| Output Type      | Constant Current    |
| Dimming Type     | Zigbee CCT          |
| Dimming Range    | 1%-100% CCT 0%-100% |
| Output Features  | Isolation           |
| Limited voltage  | Max.264V AC         |
| T.H.D            | <10%                |
| Power Factor     | >0.9                |
| Current Ripple   | 3%                  |
| Power-on Time    | <0.5s               |
| Protection class | Class II SELV       |
| Surge            | L-N:1.5KV           |
| Ta               | -20°C~+50°C         |
| Tc               | 85°C                |
| IP rating        | IP20                |
| Life time        | 50000 hours         |
| Warranty         | 5 years             |



Light up your life

www.luccalight.cz

**WIRELESS • CC • DRIVER • ACCESSORY**



EAN : 68014094


HA-IO040BF-CCX1000/S

IP20 0-10V CC Dimmable Driver

| Watt         | Input Voltage | Output Voltage | Output Current     | Efficiency | P.F. |
|--------------|---------------|----------------|--------------------|------------|------|
| 28/32/36/40W | 220-240V AC   | 20-40VDC       | 700/800/900/1000mA | 90%        | 0.95 |



Wattage Adjustable  
Current Adjustable

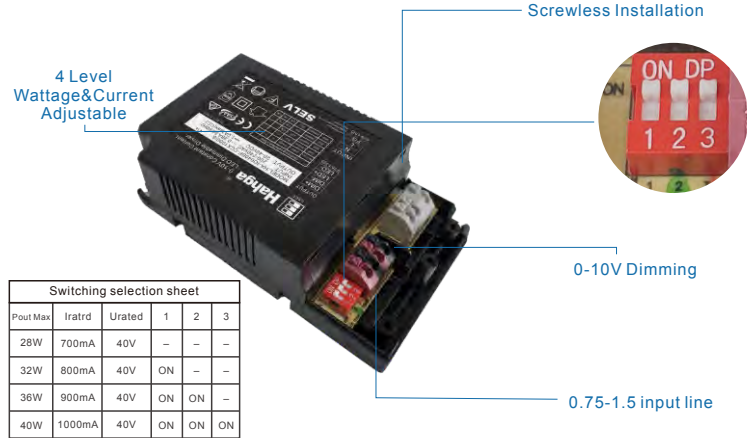

| Switching selection sheet |        |        |    |    |    |
|---------------------------|--------|--------|----|----|----|
| Pout Max                  | Iratrd | Urated | 1  | 2  | 3  |
| 28W                       | 700mA  | 40V    | -  | -  | -  |
| 32W                       | 800mA  | 40V    | ON | -  | -  |
| 36W                       | 900mA  | 40V    | ON | ON | -  |
| 40W                       | 1000mA | 40V    | ON | ON | ON |


| Item             | Parameter        |
|------------------|------------------|
| Output Type      | Constant Current |
| Dimming Type     | 0-10V            |
| Dimming Range    | 1%-100%          |
| Output Features  | Isolation        |
| Limited voltage  | Max.264V AC      |
| T.H.D            | <10%             |
| Power Factor     | >0.9             |
| Current Ripple   | 3%               |
| Power-on Time    | <0.5s            |
| Protection class | Class II SELV    |
| Surge            | L-N:2KV          |
| Ta               | -20°C~+50°C      |
| Tc               | 85°C             |
| IP rating        | IP20             |
| Life time        | 50000 hours      |
| Warranty         | 5 years          |

EAN : 68014100

HA-ND040BF-CCX1000/S

Switchable Constant Current LED Driver

| Watt         | Input Voltage | Output Voltage | Output Current     | Efficiency | P.F. |
|--------------|---------------|----------------|--------------------|------------|------|
| 28/32/36/40W | 220-240V AC   | 15-40VDC       | 700/800/900/1000mA | 86%        | 0.90 |

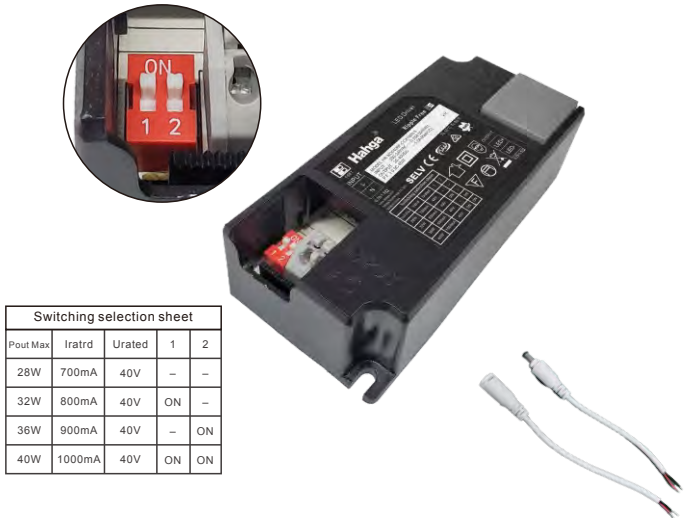

| Switching selection sheet |        |        |    |    |  |
|---------------------------|--------|--------|----|----|--|
| Pout Max                  | Iratrd | Urated | 1  | 2  |  |
| 28W                       | 700mA  | 40V    | -  | -  |  |
| 32W                       | 800mA  | 40V    | ON | -  |  |
| 36W                       | 900mA  | 40V    | -  | ON |  |
| 40W                       | 1000mA | 40V    | ON | ON |  |

| Item             | Parameter        |
|------------------|------------------|
| Output Type      | Constant Current |
| Dimming Type     | -                |
| Dimming Range    | -                |
| Output Features  | Isolation        |
| Limited voltage  | Max.264V AC      |
| T.H.D            | <10%             |
| Power Factor     | >0.9             |
| Current Ripple   | 3%               |
| Power-on Time    | <0.5s            |
| Protection class | Class II SELV    |
| Surge            | L-N:2KV          |
| Ta               | -20°C~+50°C      |
| Tc               | 85°C             |
| IP rating        | IP20             |
| Life time        | 50000 hours      |
| Warranty         | 5 years          |


With 1\* Connector

EAN : 69011375

Philips 44W Driver for LED

Philips Constant Current Driver for LED Panel

| Watt | Output Voltage | Output Current | Efficiency | P.F. |
|------|----------------|----------------|------------|------|
| 44W  | 30-42VDC       | 900mA/1050mA   | 86%        | 0.90 |

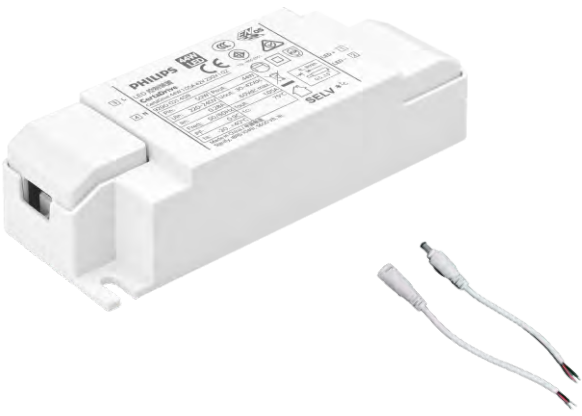

With 1\* Connector

| Item             | Parameter        |
|------------------|------------------|
| Output Type      | Constant Current |
| Dimming Type     | -                |
| Dimming Range    | -                |
| Output Features  | Isolation        |
| Limited voltage  | Max.264V AC      |
| T.H.D            | <15%             |
| Power Factor     | >0.9             |
| Current Ripple   | 3%               |
| Power-on Time    | <0.5s            |
| Protection class | Class II SELV    |
| Surge            | L-N:2KV          |
| Ta               | -20°C~+50°C      |
| Tc               | 85°C             |
| IP rating        | IP20             |
| Life time        | 50000 hours      |
| Warranty         | 5 years          |







## Constant Voltage LED Driver

### Application:

Applicable to LED Strip Light, LED Linear Light, LED Wall washer etc.

**5 YEARS**  
Warranty



#### EAN : 68013493

HA-DL100AF-CV24/TP

#### IP67 CV Dali Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 100W | 90-265V AC    | 24VDC          | 4.17A Max      | 90%        | 0.95 |

#### EAN : 68013509

HA-DL200AF-CV24/TP

#### IP67 CV Dali Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 200W | 90-265V AC    | 24VDC          | 8.33A Max      | 90%        | 0.95 |

#### EAN : 68013516

HA-DL350AF-CV24/TP

#### IP67 CV Dali Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 350W | 90-265V AC    | 24VDC          | 14.58A Max     | 90%        | 0.95 |




| Model No.          | L   | W  | H  |
|--------------------|-----|----|----|
| HA-DL060CF-CV12/TP | 163 | 56 | 35 |
| HA-DL100AF-CV12/TP | 226 | 68 | 39 |
| HA-DL150AF-CV12/TP | 226 | 68 | 39 |
| HA-DL200AF-CV12/TP | 260 | 70 | 45 |
| HA-DL300AF-CV12/TP | 285 | 95 | 50 |
| HA-DL060AF-CV24/TP | 163 | 56 | 35 |
| HA-DL100AF-CV24/TP | 226 | 68 | 39 |
| HA-DL150AF-CV24/TP | 226 | 68 | 39 |
| HA-DL200AF-CV24/TP | 260 | 70 | 45 |
| HA-DL240AF-CV24/TP | 260 | 70 | 45 |
| HA-DL300AF-CV24/TP | 285 | 95 | 50 |
| HA-DL350AF-CV24/TP | 285 | 95 | 50 |
| HA-DL400AF-CV24/TP | 285 | 95 | 50 |
| HA-DL150AF-CV36/TP | 226 | 68 | 39 |
| HA-DL300AF-CV36/TP | 285 | 95 | 50 |
| HA-DL350AF-CV36/TP | 285 | 95 | 50 |
| HA-DL400AF-CV36/TP | 285 | 95 | 50 |

| Item                    | Parameter              |
|-------------------------|------------------------|
| Rated voltage           | 90-277V AC / 90-400VDC |
| Limited voltage         | Max.305V AC / 400VDC   |
| Overvoltage protection  | 360V(30 min)           |
| T.H.D                   | <10%                   |
| Output current accuracy | 3%                     |
| Power-on Time           | <0.5s                  |
| Protection class        | Class I SELV           |
| Surge                   | L-N:4KV/L / N-FG:6KV   |
| Protection              | SCP/OTP/OLP/OVP/OC     |
| Ta                      | -20~50°C               |
| Tc                      | 80°C                   |
| IP rating               | IP67                   |
| Life time               | 50000 hours            |
| Warranty                | 5 years                |





# IP20 1-10V Dimming Constant Voltage Slim Size Driver

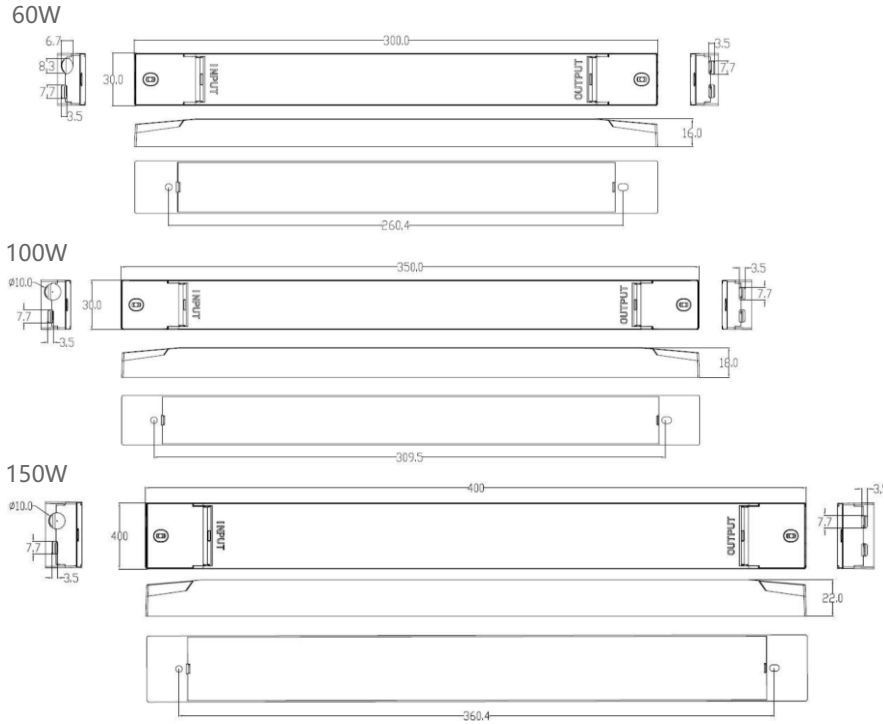

| Item             | Parameter        |
|------------------|------------------|
| Output Type      | Constant Voltage |
| Dimming Type     | 1-10V PWM        |
| Dimming Range    | 10%-100%         |
| Output Features  | Isolation        |
| Limited voltage  | Max.264V AC      |
| T.H.D            | <7%              |
| Power Factor     | >0.95            |
| Voltage Ripple   | 1%               |
| Power-on Time    | <0.5s            |
| Protection class | Class II SELV    |
| Surge            | L-N:2KV          |
| Ta               | -25°C~+50°C      |
| Tc               | +85°C            |
| IP rating        | IP20             |
| Life time        | 50000 hours      |
| Warranty         | 5 years          |

EAN : 68016555

HA-1KL060BF-CV24

IP20 1-10V Constant Voltage Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 60W  | 220-240V AC   | 24V dc         | Max 2500mA     | 86%        | 0.95 |



EAN : 68016562

HA-1KL100BF-CV24

IP20 1-10V Constant Voltage Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 100W | 220-240V AC   | 24V dc         | Max 4170mA     | 926%       | 0.95 |



EAN : 68016579

HA-1KL150BF-CV24

IP20 1-10V Constant Voltage Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 150W | 220-240V AC   | 24V dc         | Max 6670mA     | 93%        | 0.95 |







**EAN : 68013738**

HA-IO350AF-CV24/TP

IP67 0-10V CV Dimmable Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 350W | 90-265V AC    | 24VDC          | 14.58A Max     | 90%        | 0.95 |



**0-10V**  
Dimmable




**IP67**  
RATING

**5 YEARS**  
Warranty



350W

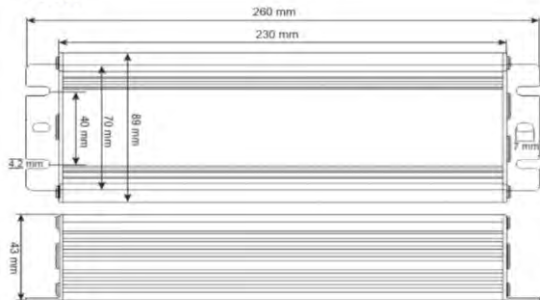

| Item                    | Parameter             |
|-------------------------|-----------------------|
| Rated voltage           | 90-277V AC /90-400VDC |
| Limited voltage         | Max.305V AC / 400VDC  |
| Overvoltage protection  | 360V(30 min)          |
| T.H.D                   | <10%                  |
| Output current accuracy | 3%                    |
| Power-on Time           | <0.5s                 |
| Protection class        | Class I SELV          |
| Surge                   | L-N:4KV/L / N-FG:6KV  |
| Protection              | SCP/OTP/OLP/OVP/OCP   |
| Ta                      | -20~50°C              |
| Tc                      | 80°C                  |
| IP rating               | IP67                  |
| Life time               | 50000 hours           |
| Warranty                | 5 years               |

**EAN : 68014233**

HA-ND024AF-CV12/S

IP20 Constant Voltage Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency |
|------|---------------|----------------|----------------|------------|
| 24W  | 100-240V AC   | 12V dc         | Max 2000mA     | 85%        |

**5 YEARS**  
Warranty



**EAN : 68014247**

HA-ND036AF-CV12/S

IP20 Constant Voltage river

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency |
|------|---------------|----------------|----------------|------------|
| 36W  | 100-240V AC   | 12V dc         | Max 3000mA     | 85%        |

**5 YEARS**  
Warranty



**EAN : 68014285**

HA-ND060AF-CV12/S

IP20 Constant Voltage Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency |
|------|---------------|----------------|----------------|------------|
| 60W  | 100-240V AC   | 12V dc         | Max 5000mA     | 85%        |

**5 YEARS**  
Warranty



**EAN : 68017767**

HA-ND080AF-CV12

IP20 Constant Voltage Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency |
|------|---------------|----------------|----------------|------------|
| 80W  | 100-240V AC   | 12V dc         | Max 6700mA     | 85%        |

**5 YEARS**  
Warranty



|                 |             |
|-----------------|-------------|
| HA-ND024AF-CV/S | 115*45*29mm |
| HA-ND036AF-CV/S | 140*45*29mm |
| HA-ND060AF-CV/S | 165*45*30mm |
| HA-ND080AF-CV/S | 165*45*30mm |

| Item             | Parameter        |
|------------------|------------------|
| Output Type      | Constant Voltage |
| Dimming Type     | -                |
| Dimming Range    | -                |
| Output Features  | Isolation        |
| Limited voltage  | Max.264V AC      |
| T.H.D            | <15%             |
| Power Factor     | >0.95            |
| Voltage Ripple   | 3%               |
| Power-on Time    | <1s              |
| Protection class | Class II SELV    |
| Surge            | L-N:1.5KV        |
| Ta               | -25°C~+50°C      |
| Tc               | +85°C            |
| IP rating        | IP20             |
| Life time        | 50000 hours      |
| Warranty         | 5 years          |



*Light up your life*

www.luccalight.cz

**0-10V • CV • DRIVER • ACCESSORY**



**EAN : 68016807**

HA-NKL060BF-CV24

IP20 Constant Voltage Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 60W  | 220-240V AC   | 24V dc         | Max 2500mA     | 86%        | 0.95 |



**EAN : 68016814**

HA-NKL100BF-CV24

IP20 Constant Voltage river

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 100W | 220-240V AC   | 24V dc         | Max 4170mA     | 92%        | 0.95 |



**EAN : 68016821**

HA-NKL150BF-CV24

IP20 Constant Voltage Driver

| Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|------|---------------|----------------|----------------|------------|------|
| 150W | 220-240V AC   | 24V dc         | Max 6670mA     | 93%        | 0.95 |



| Item             | Parameter        |
|------------------|------------------|
| Output Type      | Constant Voltage |
| Dimming Type     | -                |
| Dimming Range    | -                |
| Output Features  | Isolation        |
| Limited voltage  | Max.264V AC      |
| T.H.D            | <7%              |
| Power Factor     | >0.95            |
| Voltage Ripple   | 1%               |
| Power-on Time    | <0.5s            |
| Protection class | Class II SELV    |
| Surge            | L-N:2KV          |
| Ta               | -25°C~+50°C      |
| Tc               | +85°C            |
| IP rating        | IP20             |
| Life time        | 50000 hours      |
| Warranty         | 5 years          |



LED IP67 Outdoor Driver

- ▶ IP67 Waterproof Outdoor Driver
- ▶ Constant Voltage with AC&DC input
- ▶ For LED Product
- ▶ 5 Years Warranty
- ▶ CE Pass Quality



**EAN : 68014858**

HA-NDZ200AF-CV24/TP

IP67 Outdoor Waterproof Constant Voltage Driver



| Max Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|----------|---------------|----------------|----------------|------------|------|
| 200W     | 90-265V AC    | 24VDC          | Max 8.3A       | 91%        | 0.95 |

**EAN : 68014889**

HA-NDZ300AF-CV24/TP

IP67 Outdoor Waterproof Constant Voltage Driver

| Max Watt | Input Voltage | Output Voltage | Output Current | Efficiency | P.F. |
|----------|---------------|----------------|----------------|------------|------|
| 300W     | 90-265V AC    | 24VDC          | Max12.5A       | 91%        | 0.95 |

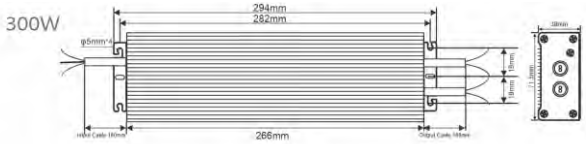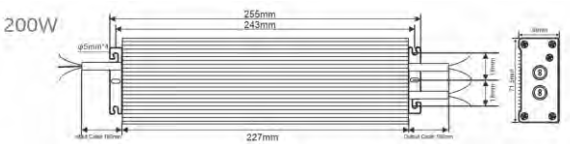

| Item                    | Parameter            |
|-------------------------|----------------------|
| Rated voltage           | 100-270V AC          |
| Limited voltage         | Max.300V AC          |
| Overvoltage protection  | 360V(30 min)         |
| T.H.D                   | <15%                 |
| Output current accuracy | 3%                   |
| Power-on Time           | <0.5s                |
| Protection class        | Class I,SELV         |
| Surge                   | L-N:4KV/L / N-FG:6KV |
| Protection              | SCP/OTP/OLP          |
| Ta                      | -20~40°C             |
| Tc                      | 85°C                 |
| IP rating               | Ip67                 |
| Life time               | 50000 hours          |
| Warranty                | 5 years              |

| Item             |       | Parameter                              |                                    |
|------------------|-------|----------------------------------------|------------------------------------|
| Protection       |       | Short Circuit Protection, Hiccup Mode, |                                    |
|                  |       | Over temperature Protection,           |                                    |
|                  |       | Over Loading Protection,               |                                    |
|                  |       | Over Voltage Protection,               |                                    |
|                  |       | Over Current Protection,               |                                    |
|                  |       |                                        |                                    |
| Connection       |       | Wire                                   |                                    |
| Input Wire       | ≤400W |                                        | SJOW 17AWG*3C&H05RN-F 1.0mm²(30cm) |
|                  | >400W |                                        | SJOW 15AWG*3C&H05RN-F 1.5mm²(30cm) |
| Output LEDs Wire | C.C.  | ≤240W                                  | SJOW 17AWG*2C&H05RN-F 1.0mm²(30cm) |
|                  |       | 241-400W                               | SJOW 14AWG*2C&H05RN-F 2.0mm²(30cm) |
|                  |       | >400W                                  | SJOW 13AWG*2C&H05RN-F 2.5mm²(30cm) |
|                  | C.V.  | 12V:<100W<br>24V/36V48V:<150W          | SJOW 17AWG*2C&H05RN-F 1.0mm²(30cm) |
|                  |       | 12V:101-200W<br>24V/36V48V:<151-400W   | SJOW 14AWG*2C&H05RN-F 2.0mm²(30cm) |
|                  |       | 12V:201-300W<br>24V/36V48V:>400W       | SJOW 13AWG*2C&H05RN-F 2.5mm²(30cm) |
| Signal Wire      |       | SJOW 18AWG*2C&H05RN-F 0.75mm²(30cm)    |                                    |



EAN : 68013837

HA-EMIN019A-SP

Switchable LED Integrated Emergency Convertor

Power of Luminaries

100W

Max Current

3A

Duration Power

3/5/7/9W



Duration Time

3/2/1.5/1Hr

LiFePO4  
Battery



2  
YEARS  
Warranty



| Item             | Parameter              |
|------------------|------------------------|
| Rated voltage    | 100-277V AC            |
| Output Voltage   | 10-80V DC              |
| Load power       | Max 100W DC 3A         |
| Charging Time    | >12hours               |
| Emergency Time   | 60-180 min             |
| Battery Pack     | LiFePO4 : 6.4V 1800mAh |
| Response Time    | <1s                    |
| Protection class | Class I                |
| Charging Current | 0-300mAV               |
| Protection       | SCP/OTP                |
| Ta               | -20~50°C               |
| Tc               | -                      |
| IP rating        | IP20                   |
| Life time        | -                      |
| Warranty         | 5 years                |

EAN : 68014070

HA-EMIN02A-SP

LED Integrated Emergency Convertor

Power of Luminaries

80W

Max Current

3A

Duration Power

3W


Duration Time

3 Hours

LiFePO4  
Battery



2  
YEARS  
Warranty



| Item             | Parameter              |
|------------------|------------------------|
| Rated voltage    | 100-277V AC            |
| Output Voltage   | 10-80V DC              |
| Load power       | Max 100W DC 3A         |
| Charging Time    | >12hours               |
| Emergency Time   | 60-180 min             |
| Battery Pack     | LiFePO4 : 3.2V 1800mAh |
| Response Time    | <1s                    |
| Protection class | Class I                |
| Charging Current | 0-300mAV               |
| Protection       | SCP/OTP                |
| Ta               | -20~50°C               |
| Tc               | -                      |
| IP rating        | IP20                   |
| Life time        | -                      |
| Warranty         | 5 years                |

LUCCA  
Light up your life



EMERGENCY PACK • DRIVER • ACCESSORY



Light up your life

www.luccalight.cz



EAN : 68013424


HA-IO-DIM

0-10V Dimmer


- ▶ Rotary Panel 0-10V Dimmer, 1 channel output
- ▶ Output 1 channel 0-10V Signal, Connect with 0/1-10V dimmable driver
- ▶ High Voltage AC input, High Voltage AC Switch Output
- ▶ Rotate Knob to Change Brightness




| Item           | Parameter    |
|----------------|--------------|
| Input Voltage  | AC85-265V    |
| Input Signal   | Rotary Knob  |
| Output Voltage | AC85-265V    |
| Output Signal  | 0/1-10V 20mA |
| Output Current | Max 3.0A ac  |
| Dimming Range  | 0-100%       |
| EMC Standard   | Pass         |
| LVD Standard   | Pass         |
| TA             | -30°C~+55°C  |
| TC             | +65°C        |
| IP rate        | IP20         |
| Gross Weight   | 0.12KG       |
| Net Weight     | 0.09KG       |
| Warranty       | 5 Years      |

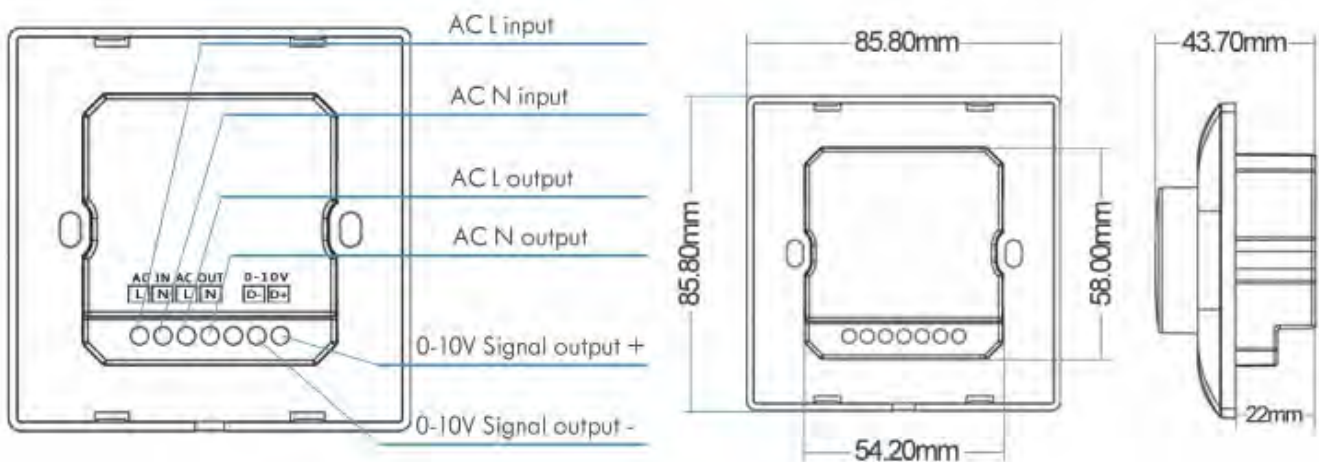

■ Connect with 0/1-10V dimming driver (no use AC OUT)

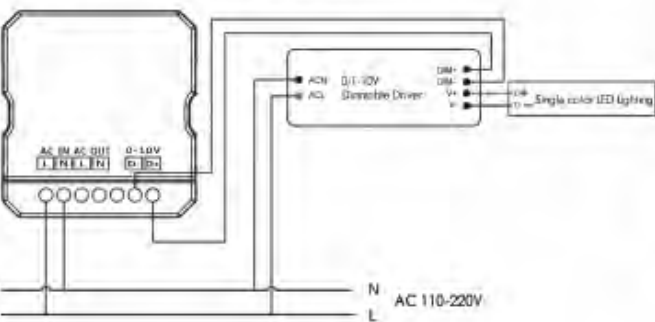

■ Connect with 0/1-10V dimming driver (use AC OUT)

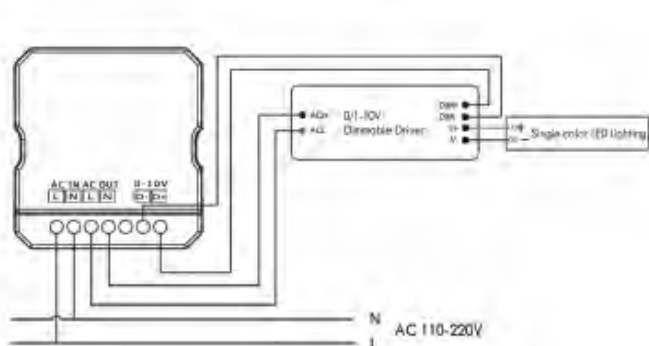

EAN : 68013431



HA-TR-DIM

TRIAC Dimmer

- ▶ Rotary Panel AC Phase-cut Dimmer, 1 channel output.
- ▶ To Dim and Switch single color Dimmable LED Lamps, Traditional Incandescent and Halogen Lights.
- ▶ Rotate knob to change brightness, support push and with memory function.
- ▶ Min brightness set by Min knob.



| Item           | Parameter    |
|----------------|--------------|
| Input Voltage  | AC200-240V   |
| Input Signal   | Rotary Knob  |
| Output Voltage | AC200-240V   |
| Output Power   | 5-300W       |
| Output Current | Max 1.25A ac |
| Dimming Range  | 0-100%       |
| EMC Standard   | Pass         |
| LVD Standard   | Pass         |
| TA             | -30°C~+55°C  |
| TC             | +85°C        |
| IP rate        | IP20         |
| Gross Weight   | 0.098KG      |
| Net Weight     | 0.085KG      |
| Warranty       | 5 Years      |

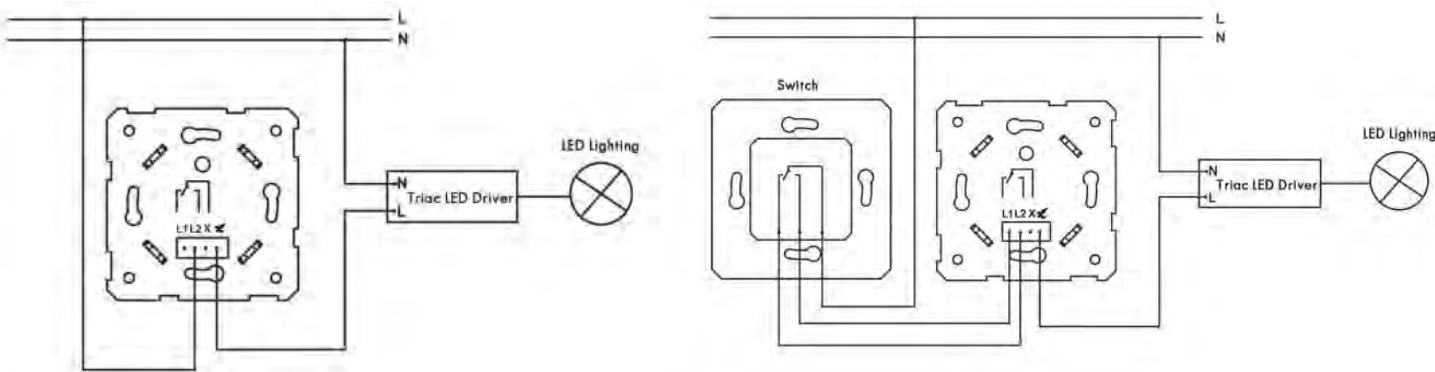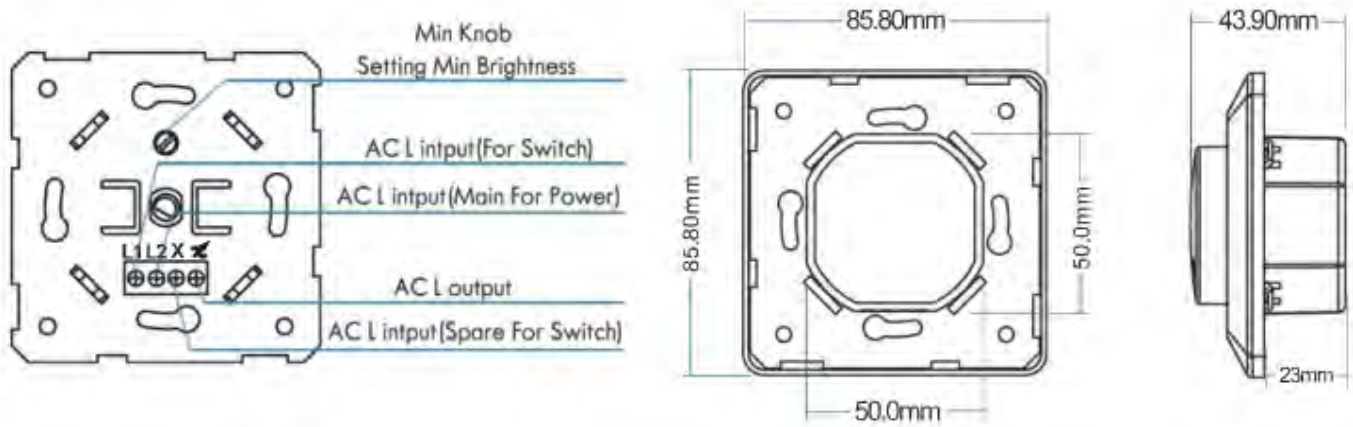


Light up your life

www.luccalight.cz



# LUCCA TRACK

## LIGHTING TRACK SYSTEMS AND UNIVERSAL ADAPTERS



### TR4X /TR4R Series

TR4 Series is the most sold three-circuit lighting track system in the world. It is the first choice of professionals and lighting manufacturers. Long experience and 100% quality assurance ensure problem-free operation.


#### Easy to extend

The modular structure of the system makes it easy to extend and adapt to various needs. Modular dimensions help the designers fit the system into an appropriate space and also make on-site mounting easier. Reliable connectors ensure fast and easy installation which saving overall cost.


### TR4X Surface Mounted

#### Earth run layout help


Bird's eye view with the track opening pointed downwards

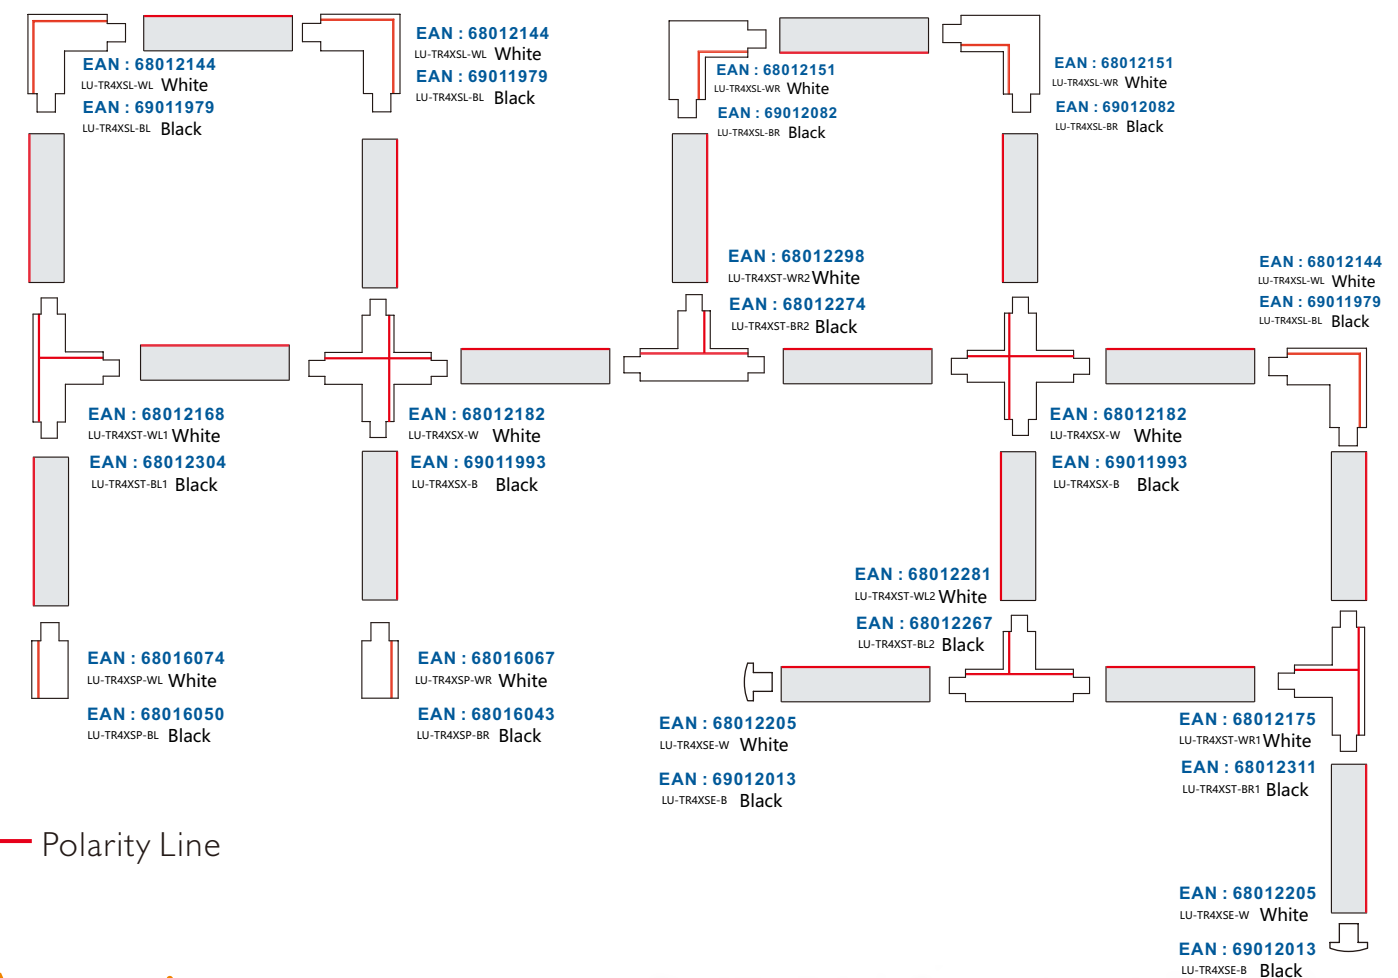

### TR4X Surface

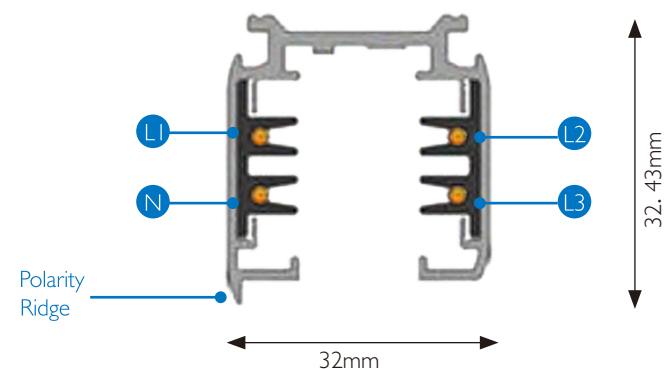


### TR4R Recessed

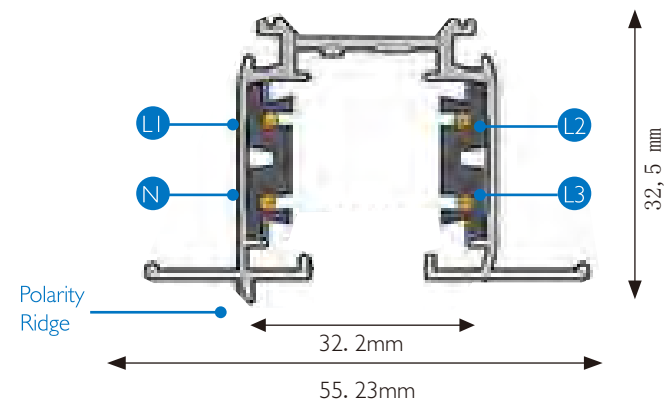


### 4 wire 3 phase track system

Power Conductor Cross-Section: 4.0mm<sup>2</sup>

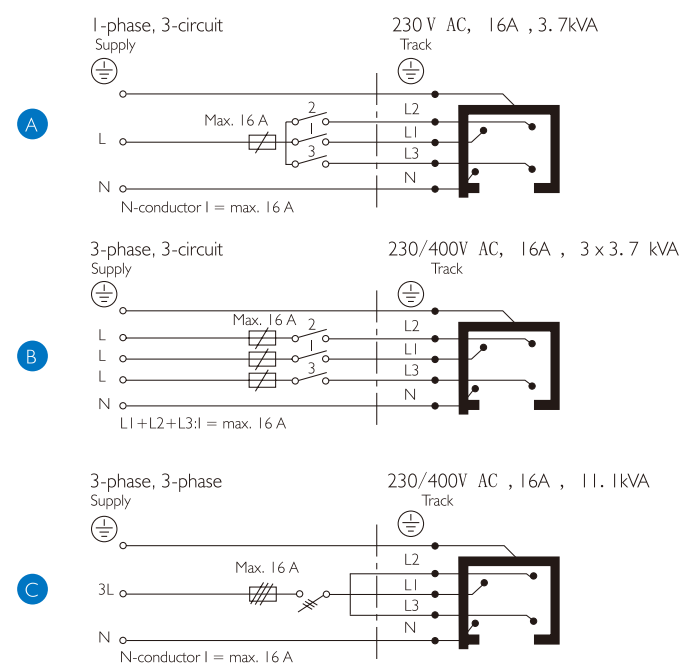

### Attention:

NO closed circle structure

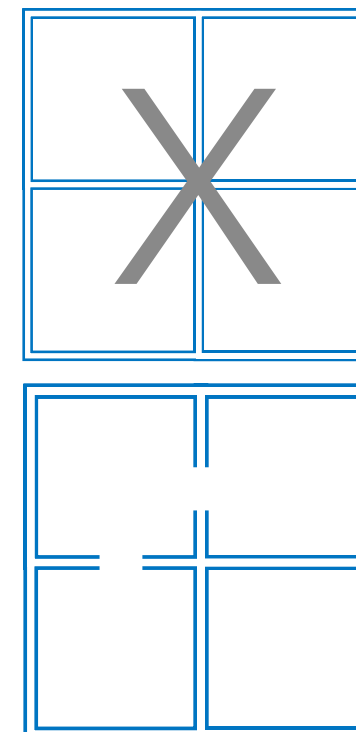


#### 3-Phase Track Accessories Polarity


##### • 3-Phase Power Connector




##### • 3-Phase L Connector



##### • 3-Phase T Connector

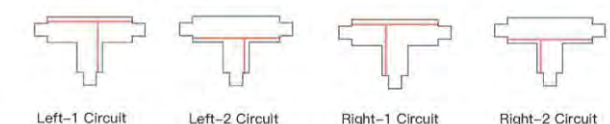

##### • 3-Phase X Connector



#### Use of L-And T-Accessories

##### • Red Line Indicates Polarity Ridge




##### • Floor View





TR4X Surface Mounted


Surface Mounted Tracks :



○ WHITE  
● BLACK


| Model No.   | EAN No.  | Color | Size |
|-------------|----------|-------|------|
| LU-TR4X-20W | 68012113 | White | 2m   |
| LU-TR4X-20B | 69011825 | Black | 2m   |

I mini Connector




|             |          |       |  |
|-------------|----------|-------|--|
| LU-TR4XMI-W | 68012120 | White |  |
| LU-TR4XMI-B | 69011955 | Black |  |

I Connector




|             |          |       |  |
|-------------|----------|-------|--|
| LU-TR4XSI-W | 68012137 | White |  |
| LU-TR4XSI-B | 69011962 | Black |  |

X Connector




|                                                                                     |             |          |       |
|-------------------------------------------------------------------------------------|-------------|----------|-------|
|  | LU-TR4XSX-W | 68012182 | White |
|                                                                                     | LU-TR4XSX-B | 69011993 | Black |

L Connector




|                                                                                     |              |          |       |
|-------------------------------------------------------------------------------------|--------------|----------|-------|
|  | LU-TR4XSL-WL | 68012144 | White |
|                                                                                     | LU-TR4XSL-BL | 69011979 | Black |
|  | LU-TR4XSL-WR | 68012151 | White |
|                                                                                     | LU-TR4XSL-BR | 69012082 | Black |

T Connector




|                                                                                     |               |          |       |
|-------------------------------------------------------------------------------------|---------------|----------|-------|
|  | LU-TR4XST-WR1 | 68012175 | White |
|                                                                                     | LU-TR4XST-BR1 | 68012311 | Black |
|  | LU-TR4XST-WL2 | 68012281 | White |
|                                                                                     | LU-TR4XST-BL2 | 68012267 | Black |
|  | LU-TR4XST-WL1 | 68012168 | White |
|                                                                                     | LU-TR4XST-BL1 | 68012304 | Black |
|  | LU-TR4XST-WR2 | 68012298 | White |
|                                                                                     | LU-TR4XST-BR2 | 68012274 | Black |

Adjustable Connector




|             |          |       |
|-------------|----------|-------|
| LU-TR4XSA-W | 68017811 | White |
| LU-TR4XSA-B | 68017828 | Black |

Flexible Connector




|             |          |       |
|-------------|----------|-------|
| LU-TR4XSF-W | 68017835 | White |
| LU-TR4XSF-B | 68017842 | Black |

Power Connector



|                                                                                     |              |          |       |
|-------------------------------------------------------------------------------------|--------------|----------|-------|
|  | LU-TR4XSP-WR | 68016067 | White |
|                                                                                     | LU-TR4XSP-BR | 68016043 | Black |
|  | LU-TR4XSP-WL | 68016074 | White |
|                                                                                     | LU-TR4XSP-BL | 68016050 | Black |

End Cap




|             |          |       |
|-------------|----------|-------|
| LU-TR4XSE-W | 68012205 | White |
| LU-TR4XSE-B | 69012013 | Black |





TR4R Recessed

Recessed Mounted Tracks:



○


WHITE

●

BLACK


| Model No.   | EAN No.  | Color | Size |
|-------------|----------|-------|------|
| LU-TR4R-20W | 68017620 | White | 2m   |
| LU-TR4R-20B | 69017498 | Black | 2m   |

I mini Connector




|             |          |       |
|-------------|----------|-------|
| LU-TR4RMI-W | 68017637 | White |
| LU-TR4RMI-B | 68017504 | Black |

I Connector




|             |          |       |
|-------------|----------|-------|
| LU-TR4RSI-W | 68017644 | White |
| LU-TR4RSI-B | 68017514 | Black |

X Connector




|  |             |          |       |
|--|-------------|----------|-------|
|  | LU-TR4RSX-W | 68017712 | White |
|  | LU-TR4RSX-B | 68017583 | Black |

L Connector




|  |              |          |       |
|--|--------------|----------|-------|
|  | LU-TR4RSL-WL | 68017651 | White |
|  | LU-TR4RSL-BL | 68017521 | Black |
|  | LU-TR4RSL-WR | 68017668 | White |
|  | LU-TR4RSL-BR | 68017538 | Black |

T Connector




|  |               |          |       |
|--|---------------|----------|-------|
|  | LU-TR4RST-WR1 | 68017699 | White |
|  | LU-TR4RST-BR1 | 68017569 | Black |
|  | LU-TR4RST-WL2 | 68017682 | White |
|  | LU-TR4RST-BL2 | 68017552 | Black |
|  | LU-TR4RST-WL1 | 68017675 | White |
|  | LU-TR4RST-BL1 | 68017545 | Black |
|  | LU-TR4RST-WR2 | 68017705 | White |
|  | LU-TR4RST-BR2 | 68017576 | Black |

Power Connector



|  |              |          |       |
|--|--------------|----------|-------|
|  | LU-TR4RSP-WR | 68017736 | White |
|  | LU-TR4RSP-BR | 68017606 | Black |
|  | LU-TR4RSP-WL | 68017729 | White |
|  | LU-TR4RSP-BL | 68017590 | Black |


End Cap



|             |          |       |
|-------------|----------|-------|
| LU-TR4RSE-W | 68017743 | White |
| LU-TR4RSE-B | 68017613 | Black |

Earth run layout help

Bird's eye view with the track opening pointed downwards

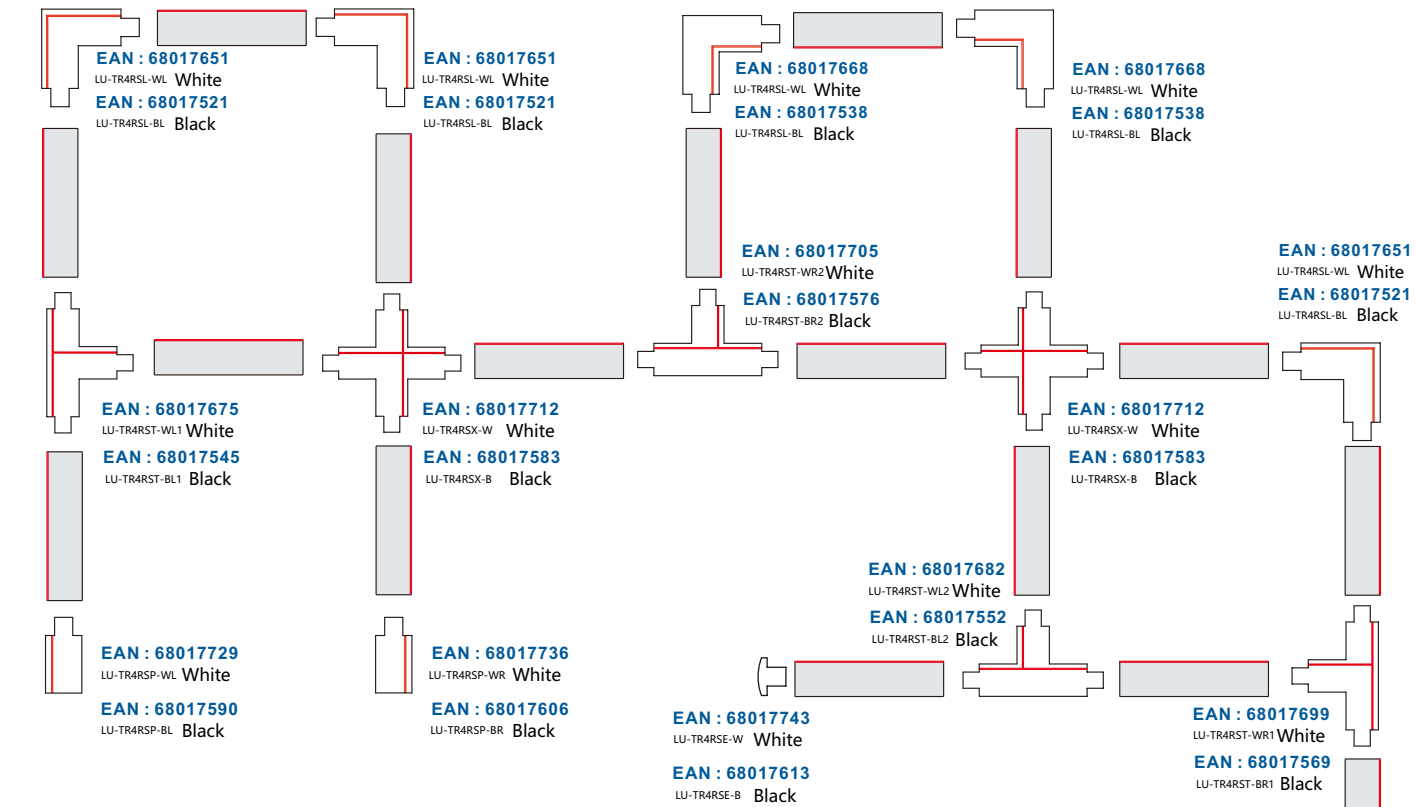

— Polarity Line



# Installation accessory


Track Rail suspension wire



| Model No.     | EAN No.  | Color | Size |     |
|---------------|----------|-------|------|-----|
| LU-TRSP-3M(W) | 68017481 | White | 3m   | *ES |
| LU-TRSP-3M(B) | 68017474 | Black | 3m   | *ES |


\*Length customized

Track Rail Recessed Clip




|           |          |  |  |     |
|-----------|----------|--|--|-----|
| LU-TR4RSC | 68017750 |  |  | *ES |
|-----------|----------|--|--|-----|

Predrilled Mounting Holes for Base Tracks:

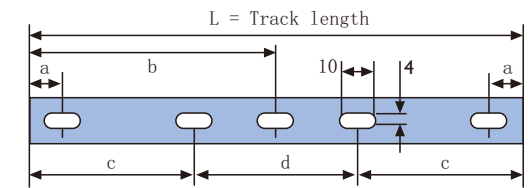

| L/mm | a/mm | b/mm | c/mm | d/mm |
|------|------|------|------|------|
| 1000 | 250  |      |      |      |
| 2000 | 250  | 1000 |      |      |
| 3000 | 250  |      | 1000 | 1000 |


Load Capacity:

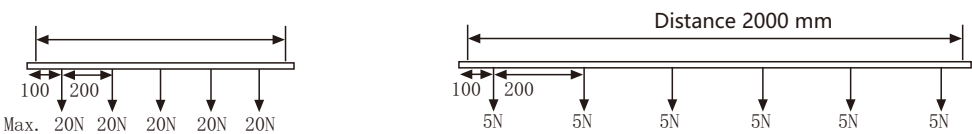


The Recommended fastening distance is 1000 mm

Direct

Direct fixing

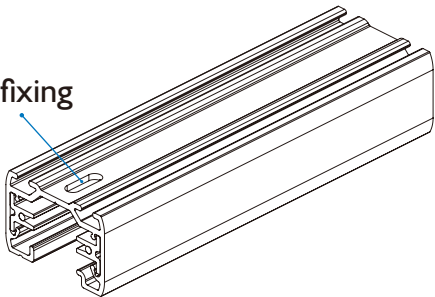

Wire Suspension

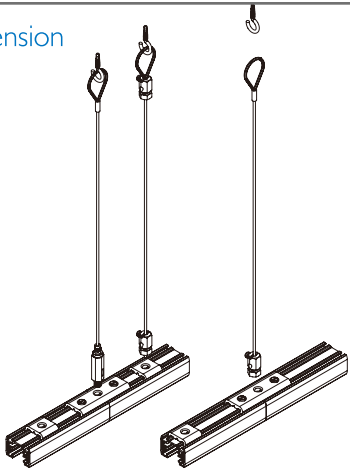






## LED Panel Accessory

- For LED Product
- Full Aluminum Material
- CE Pass Quality



Surface mounting Installation

**New Design**  
**Screwless**  
**Save Time for Installation**


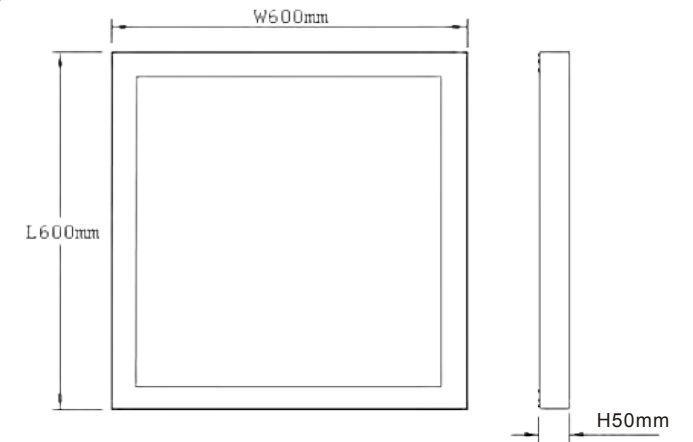


**EAN : 68013382**

LU-CMSC6060

**Panel S Frame 60\*60**

|          |              |
|----------|--------------|
| Color    | White        |
| Material | Al           |
| Size     | 600*600*42mm |

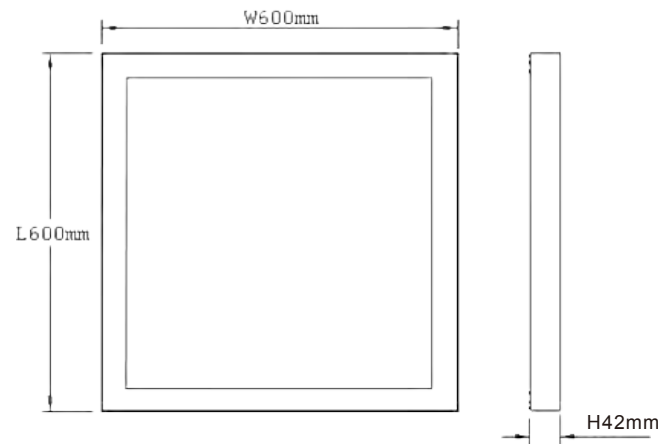

**EAN : 68013399**

LU-CMSC30120

**Panel S Frame 30\*120**

|          |               |
|----------|---------------|
| Color    | White         |
| Material | Al            |
| Size     | 300*1200*42mm |




**EAN : 68013400**

LU-CMSC60120

**Panel S Frame 60\*120**

|          |               |
|----------|---------------|
| Color    | White         |
| Material | Al            |
| Size     | 600*1200*42mm |



**EAN : 69010118**

LU-CM6060

**Panel Frame 60\*60**

|          |              |
|----------|--------------|
| Color    | White        |
| Material | Al           |
| Size     | 600*600*50mm |



**EAN : 69011863**

LU-CM6262

**Panel Frame 62\*62**

|          |              |
|----------|--------------|
| Color    | White        |
| Material | Al           |
| Size     | 620*620*50mm |



**EAN : 69010491**

LU-CM30120

**Panel Frame 30\*120**

|          |               |
|----------|---------------|
| Color    | White         |
| Material | Al            |
| Size     | 300*1200*50mm |



**EAN : 69011269**

LU-CM60120

**Panel Frame 60\*120**

|          |               |
|----------|---------------|
| Color    | White         |
| Material | Al            |
| Size     | 600*1200*50mm |



**EAN : 68018764**

DC Connector

**Panel DC Connector**

|          |                 |
|----------|-----------------|
| Color    | White           |
| Material | PC              |
| Size     | 100mm each side |





# LED Panel Accesory



## New Design Surface Installation



**EAN : 68013417**

LU-SK-04

**6060 Panel Clip Cell mount**

|          |                 |
|----------|-----------------|
| Color    | Silver          |
| Material | Stainless Steel |
| Suit for | 6060 Panel      |




**EAN : 680134087**

LU-SK-06

**60120/30120 Panel Clip**

|          |                   |
|----------|-------------------|
| Color    | Silver            |
| Material | Stainless Steel   |
| Suit for | 60120/30120 Panel |

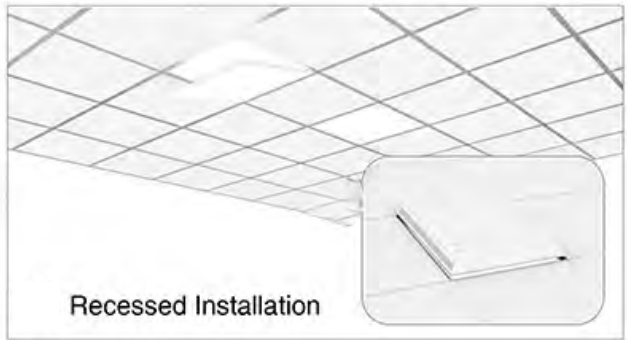

**EAN : 69011801**

LU-THK-01

**Panel Clip**

|          |                 |
|----------|-----------------|
| Color    | Silver          |
| Material | Stainless Steel |
| Suit for | All Panel       |



**EAN : 68012229**

LU-PS1-4

**Panel Suspension kit**

|          |                 |
|----------|-----------------|
| Color    | Silver          |
| Material | Stainless stell |
| Length   | 1.5m            |



## LED Triproof light ACCESSORY

- For LED Product
- 5 Years Warranty
- CE Pass Quality




**EAN : 69012075**


LS-TEP

**LED Tri-proof Light Emergency Driver Tools Pack**

|          |                 |
|----------|-----------------|
| Color    | Silver          |
| Material | Stainless Steel |

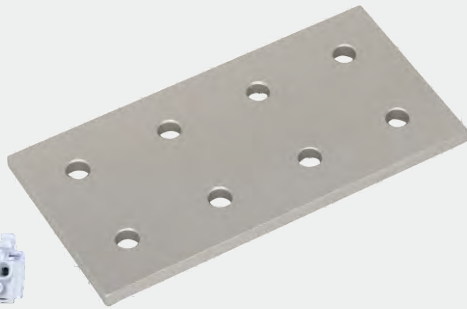

## Design For Emergency Battery and Driver Installation

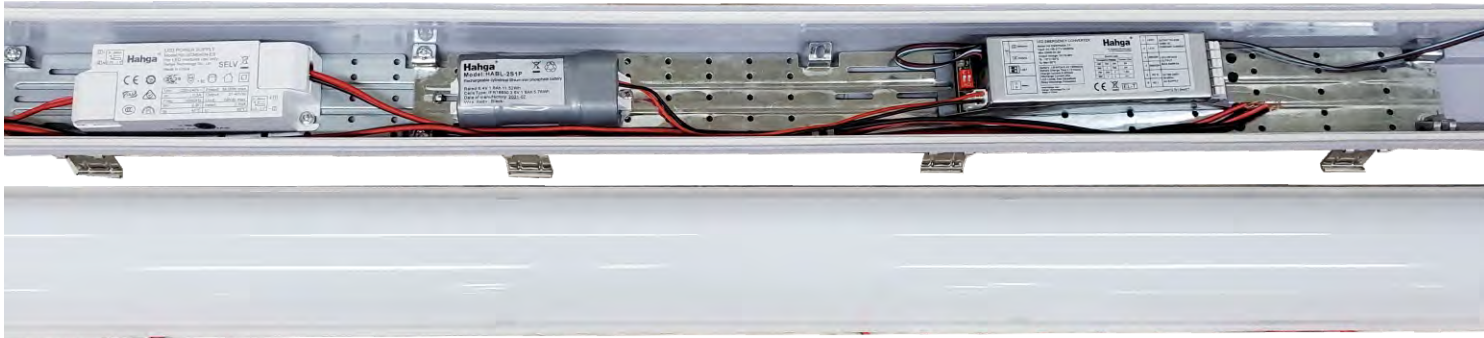

*Light up your life*

[www.luccalight.cz](http://www.luccalight.cz)

**TRIPROOF • ACCESSORY**





## LED UFO ACCESSORY

- For LED Product
- 5 Years Warranty
- CE Pass Quality



**5** YEARS  
Warranty

### EAN : 69011290

ZLens-60

#### UFO LENS 60°

|            |               |
|------------|---------------|
| Suit for   | LUZC-UFO-150W |
| Material   | PC            |
| Beam Angle | 60°           |




### EAN : 69011306

ZLens-90

#### UFO LENS 90°

|          |               |
|----------|---------------|
| Suit for | LUZC-UFO-150W |
| Material | PC            |
| Size     | 90°           |




### EAN : 69011733

LU-410C

#### UFO PC Shade

|          |               |
|----------|---------------|
| Suit for | LUZC-UFO-150W |
| Material | PC            |
| Size     | φ410*218mm    |




### EAN : 69011740

LU-410CBL

#### UFO PC Bottom Cover

|          |               |
|----------|---------------|
| Color    | LUZC-UFO-150W |
| Material | PC            |
| Size     | φ410mm        |







## Other ACCESSORY

- For LED Product
- 5 Years Warranty
- CE Pass Quality




### EAN : 68012090

LU-EM2068-3

#### Waterproof Box Terminal Block

|          |                    |
|----------|--------------------|
| Color    | Black              |
| Material | PC                 |
| Size     | 122.8*82.3*42.45mm |




### EAN : 68012106

LU-EM2068-4

#### Waterproof Box Terminal Block

|          |                    |
|----------|--------------------|
| Color    | Black              |
| Material | PC                 |
| Size     | 82.3*122.8*42.45mm |




### EAN : 68012076

LU-EM20-3P

#### Waterproof Box Terminal Block

|          |            |
|----------|------------|
| Color    | Black      |
| Material | PC         |
| Size     | Φ24*87.7mm |





### EAN : 68012083

LU-EM20-5P

#### Waterproof Box Terminal Block

|          |            |
|----------|------------|
| Color    | Black      |
| Material | PC         |
| Size     | Φ24*87.7mm |

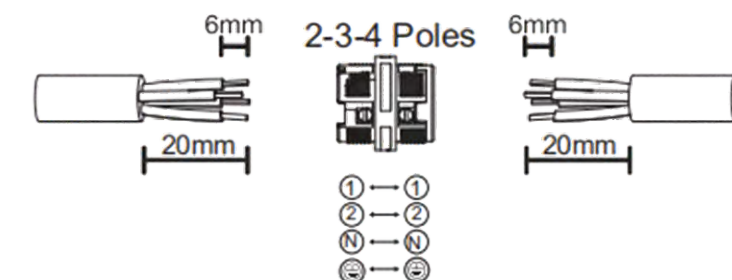





**END**

**LUCCA LIGHT Co.,Ltd**

Add: 1411, T3 BUILDING, YI CHUANG NO.4 STREET, CHINA-  
SINGAPORE GUANGZHOU KNOWLEDGE CITY, HUANGPU  
DISTRICT, GUANGZHOU CITY, CHINA.

**LUCCA LIGHT s.r.o.**

Web: <https://www.luccalight.cz>  
Email: [info@luccalight.cz](mailto:info@luccalight.cz)  
Tovární 1333, 76901 Holešov, Czech Republic