

# Backlit LED Panel Light

(EU)



Lifud No Flicker Driver



# SPECIFICATION

## Backlit LED Panel Light






### Features

- > Low consumption; More than 80% saving of the power
- > CRI:>80, IP40 protection class
- > High luminous efficacy 100lm/w, 120lm/w optional
- > No LGP inside, won't get yellowing,
- > Simple structure, low failure rate, easy to maintain and repair.
- > High brightness and efficiency with even light distribution, no bright spots, no dark areas.
- > Multiple installation modes and accessories are available including ceiling recessed, suspended, surface, wall mounting

### Application

- > Shopping Mall , Office , Restaurant
- > Super Market , School


### Dimension

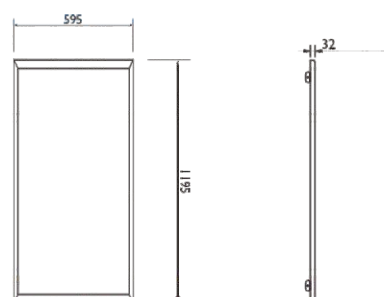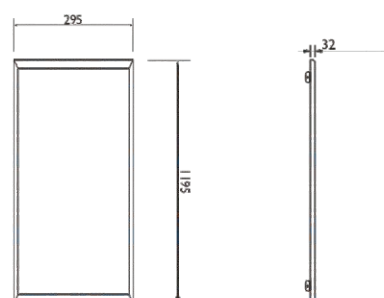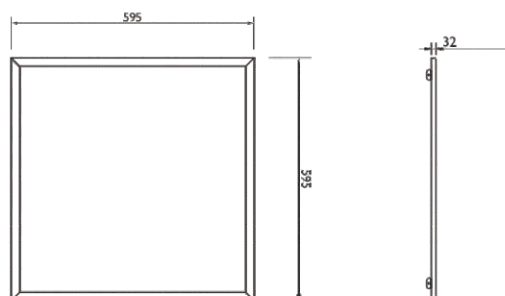

### Caution


- > Please read the user manual before installation.
- > Please install, connect and test the lamp according to local regulations, Lamps should always be installed or replaced with care by professional person.
- > Ensure the power is switched off before installation.
- > Please check whether the lamps are broken or not during shipping, broken items cannot be used anymore.
- > Please keep the lamps and accessories away from kids to avoid hurt by mistakes.
- > For protecting eyes, please do not watch the luminous surface for a long time,
- > Do not cover anything on lamp and keep lamps away from fire or high temperature objects.
- > Switch the power off and cool down the lamp before cleaning.
- > The lamp is only suitable for weak acid and weak base environment.

### Electrical Connection

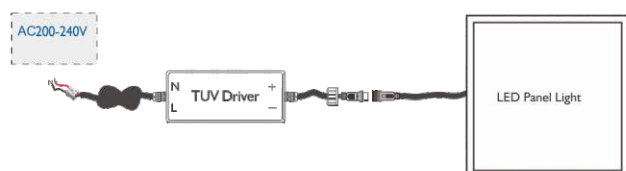


# INSTALLATION INSTRUCTIONS


## Recessed




- ①
- Make the power output terminal link to the led light panel lamp input
- Make the power input terminal received AC power supply




② Embedded installation of led light panel

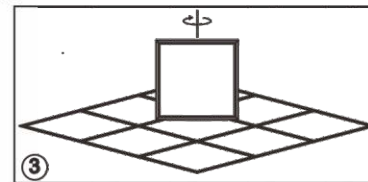


③ Make rotating face of the led light panel



④ Make face of the led light panel down




⑤ Make the panel light and the ceiling lanterns position adjustment aligned

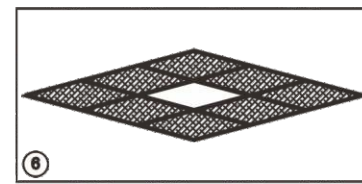

⑥ Completed the installation process


## Wall Mounted

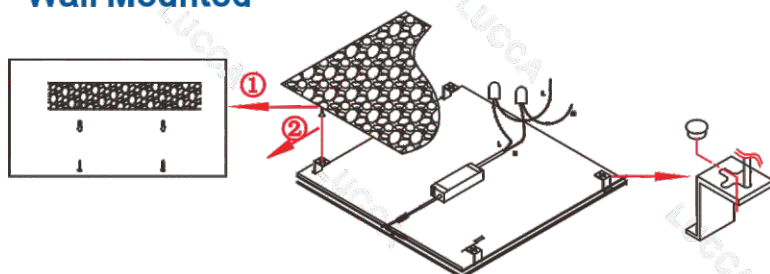

1. Fix screws into the hole site of the panel light on the wall. (Screws heads need about 5mm exposed)
2. Connect the driver with the panel light and power.
3. Hanging the LED panel lamp to match the screw, then push to the left to tighten.


4. After installing the LED panel light, tie the rubber plug into the hole to prevent displacement drop for vibration.

## Ceiling Mounted (Without frame)

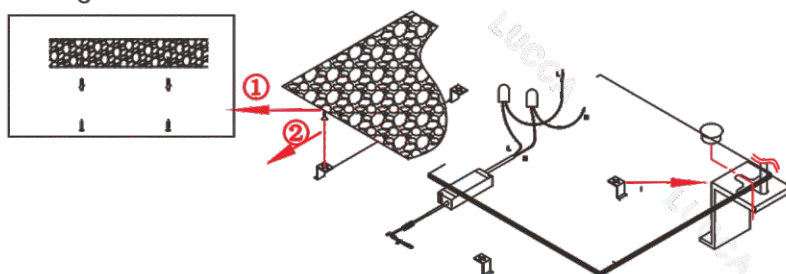


# INSTALLATION INSTRUCTIONS


## Suspended

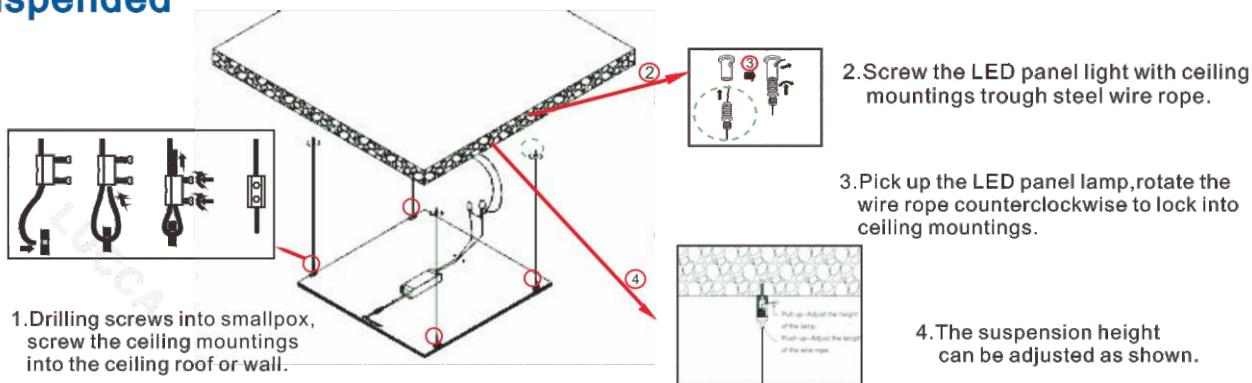

## Ceiling Mounted (With frame)

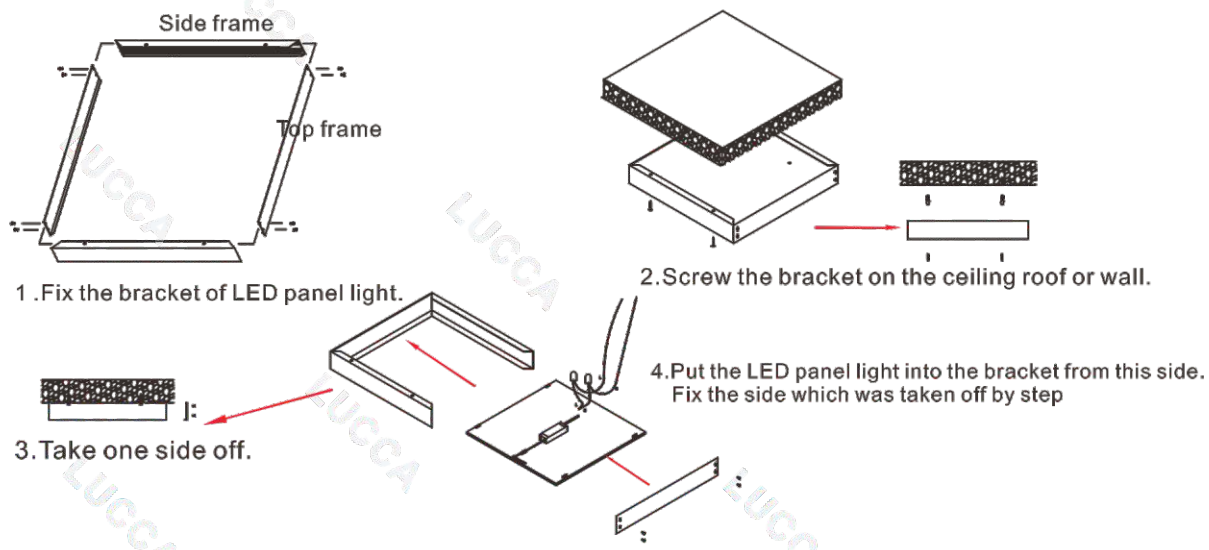


# STRUCTURE CHART

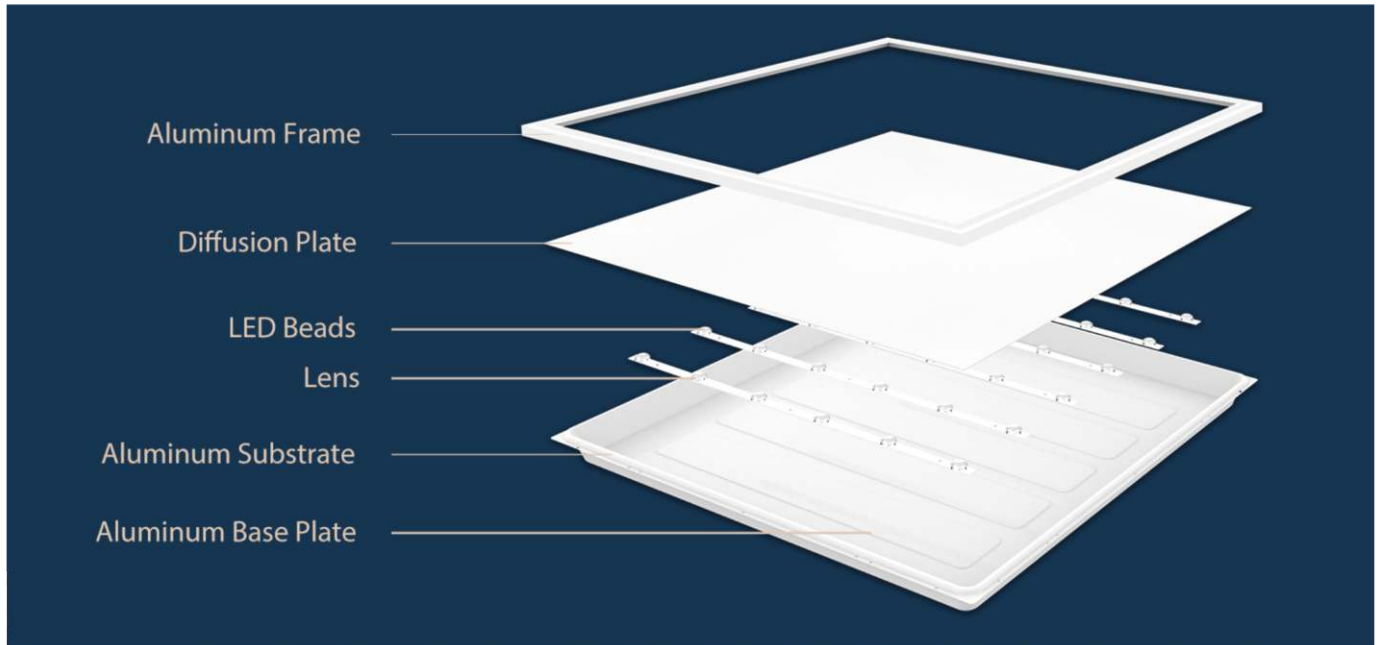

# PARAMETER

Model	LED Type	CCT	Power	CRI	Luminous Flux	Beam Angle
BKLU-6060-30W	SMD	3000K/4000K/6000K	30W	>80	3000lm/3600lm	120°
BKLU-6060-40W	SMD	3000K/4000K/6000K	40W	>80	4000lm/4800lm	120°
BKLU-6060-48W	SMD	3000K/4000K/6000K	48W	>80	4800lm/5760lm	120°
BKLU-30120-40W	SMD	3000K/4000K/6000K	40W	>80	4000lm/4800lm	120°
BKLU-60120-70W	SMD	3000K/4000K/6000K	70W	>80	7000lm/8400lm	120°

## Packing

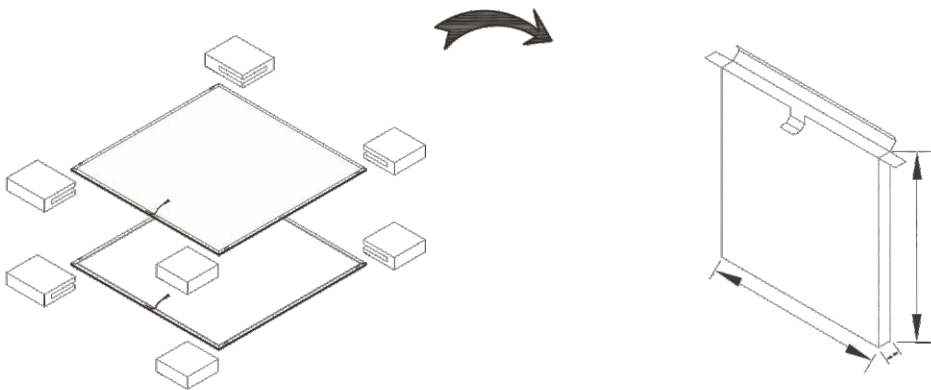

Carton

