
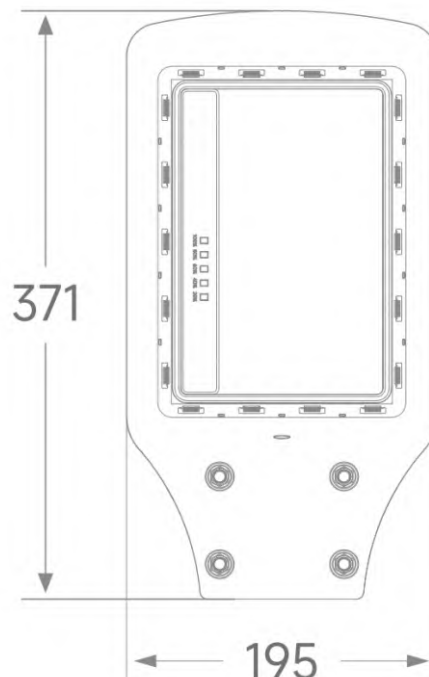


LULP-ST01-S-50W

Power:	50W
Solor Panel Power:	Class A mc-Si 6V/50W
Power Factor:	≥0.95
Battery:	3.2V/30AH-LFP Battery
Battery Life	18-24H
LED Light Source:	MLS
Luminous Flux:	7000lm
Color TemperatureL:	3000K/4000K/6500K
Color Rendering Index:	CRI≥80
Beam Angle:	90°
Operating Temperature Range:	-40°C to +50°C
Operating Humidity Range:	10 to 60%RH
Storage Temperature Range:	-40°C to +50°C
Life Span:	30000Hrs
Housing Material:	Aluminium+PC
IP Rating:	IP66
Suggestion Install Height:	5-6M
Lamp Dimension (mm):	195×58×371mm
Packing Dimension (mm):	440×300×250mm-8pcs
Solor Panel Dimension (mm):	390×700×17mm
Solar Panel Packing Dimension (mm):	740×160×505mm-4pcs
Net Weight (kg):	1.4kg/pcs
Gross Weight (kg):	7.5kg/ctn

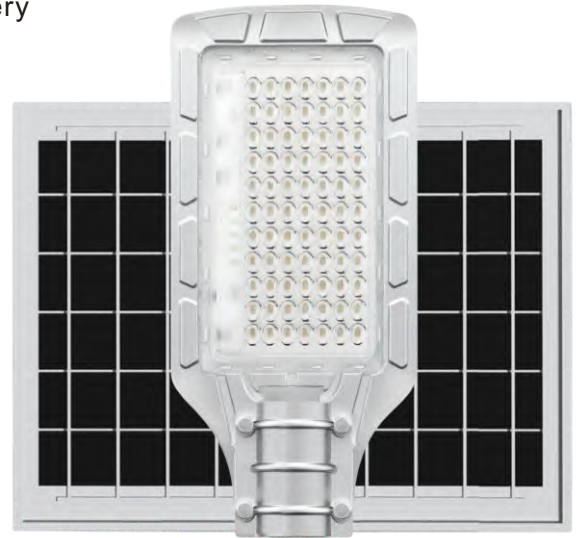

LULP-ST01-S-100W

Power:	100W
Solor Panel Power:	Class A mc-Si 6V/80W
Power Factor:	≥0.95
Battery:	3.2V/40AH-LFP Battery
Battery Life	18-24H
LED Light Source:	MLS
Luminous Flux:	5500lm
Color TemperatureL:	3000K/4000K/6500K
Color Rendering Index:	CRI≥80
Beam Angle:	90°
Operating Temperature Range:	-40°C to +50°C
Operating Humidity Range:	10 to 60%RH
Storage Temperature Range:	-40°C to +50°C
Life Span:	30000Hrs
Housing Material:	Aluminium+PC
IP Rating:	IP66
Suggestion Install Height:	6-8M
Lamp Dimension (mm):	224×64×419mm
Packing Dimension (mm):	230×70×430mm-4pcs
Solor Panel Dimension (mm):	670×640×25mm
Solar Panel Packing Dimension (mm):	735×155×710mm-4pcs
Net Weight (kg):	1.5kg/pcs
Gross Weight (kg):	8kg/ctn

